

Sideline Screen / Duck Blind

Construction & Field Operations Manual

Nominal 4 ft × 8 ft Folding Field Prop • Two-Person Direct Carry • Semicircular Wind Relief Flaps

Primary Prop Identity & Function:

The nominal 4 ft × 8 ft sideline screen (“duck blind”) provides the marching band and color guard with a concealed, professional visual staging barrier along the front sideline. It conceals auxiliary floor equipment (rifles, sabres, flags) and creates a private backstage staging area for rapid costume changes and instrument transitions during competitive performances.

Structural Architecture:

Constructed from lightweight 3/4-in. EMT galvanized steel conduit, heavy-duty commercial pipe-clamp fittings, and custom 3D-printed ASA components. The entire rear triangular support frame collapses coplanar inside the perimeter framing to a nested storage thickness of **under 2.0 inches**.



Deployed State (Triangular)



Folded State (Nested)

Document Controls & Version History

Version	Date	Document State	Key Modifications & Engineering Decisions
D24	2026-09-01	Working draft	Imported legacy v24 draft as controlled repository baseline.
D25	2026-09-01	Working draft	Standardized status markings, footers, and visible version history table.
D26	2026-09-01	Working draft	Standardized document architecture, 2026 CBA rules, and cost breakdown tables.
D27	2026-09-09	Working draft	Added vinyl installation procedure, dimensions specifications, and tape/clamp schedule.
D28	2026-09-10	Working draft	Added aerodynamic wind loading analysis, tiered ballasting schedule, and volunteer guide.
D29	2026-09-11	Working draft	Updated field operations with preliminary cart study and asymmetric backfield staging.
D30	2026-09-13	Working draft	Full Typst rewrite. Adopted Two-Student Direct Carry (16 pairs walk assembled; zero transport carts built, saving \$440). Standardized 6 true semicircular wind relief flaps ($R = 4.0$ in., 8.0 in. chord by 4.0 in. drop, pre-punched 3/8 in. / 10 mm holes, 15% drag reduction). Updated complete wind stability tables.
D31	2026-09-15	Working draft	Harmonize document architecture, section numbering (1.1–1.7, 2.1–2.10), Appendix A/B ordering, coordinate schedule tables, and Circle Cutter tooling with Backdrop manual.

Master Manual Organization & Quick-Reference Guide

- **Appendix A: Field Operations Manual (Sections 1.1–1.7):** Field-facing guide covering roles & responsibilities, the 15-minute CBA time budget, Two-Student Direct Carry deployment (55.7s, +139s buffer) and egress (55.0s, +65s buffer), zero carts, Section 1.5 full tiered wind stability tables, 2026 CBA rules, and trailer packout.
- **Appendix B: Construction & Fabrication Manual (Sections 2.1–2.10):** Complete shop guide covering safety, materials BOM, tools and circle cutter, 3D printing parameters, the 7-stick conduit cutting schedule, cost breakdown, 4-stage frame assembly, bare-frame inspection QC checklist, vinyl mounting, and Section 2.9.3 dedicated semicircular wind relief flap cutting ($R = 4.0$ in., 15% drag drop), and purchasing index.
- **Appendix C: On-Prop Laminated Field Operations Placard:** Print-ready on-prop laminated field placard for instant field reference.
- **Appendix C.1: 4 in. × 6 in. Field Placement Card Template:** Position coordinate card template for each screen location.
- **Appendix D: Parent Volunteer Competition Day Guide & Checklist:** Time-indexed milestone checklist for competition day crew.

APPENDIX A

Field Operations Manual

Two-Student Carry deployment, 15-minute time budget, wind stability, and 2026 CBA competition rules

This appendix is designed as a complete, independently printable work packet which can be distributed separately to parent volunteers, student stage crew, and field handlers.

Target Audience:	Field operators, adult duck blind managers, and student carry pairs
Document Contents:	Time budget architecture; Two-Student Carry deployment & egress; tiered ballasting; 2026 CBA rules; trailer packout
Print / Carry Scope:	All pages labeled A-
Parent Revision:	Release v0 (unreleased) Development build D31 September 2026

Separation Notice: When separated from the master document, keep this cover as the first page of Appendix A.

Appendix A: Field Operations Manual

1.1 Roles & Division of Responsibilities

Field execution of the sideline screens relies on a coordinated division of responsibility between adult logistics managers and student performers:

A. Parent Logistics Crew & Duck Blind Managers:

- **Stage Transport:** Prior to gate call, managers transport screens from equipment trucks onto 4 mobile stages (4 screens nested flat per stage) to the common outside staging area. Setup screens, verify clips and wind flaps, and load ballast wagons.
- **Ballast Wagon Teams:** Two adult managers and two student ballast handlers manage wagons carrying double-bagged 15-lb sandbags along the sideline corridor.
- **Gate & Boundary Management:** Ensure all adults clear the performance turf before the 2:45 mark to avoid CBA Rule 4.03 boundary penalties. All parents assisting on field must wear designated Field Pass wristbands (strictly limited to 25 per band per Rule 9.07).

B. Student Carry Pairs (Performers):

- **Two-Student Direct Carry:** 16 student pairs carry assembled screens (13 lbs per student) directly onto the field.
- **Synchronized Walk-Across:** Pairs walk in synchronized formation across the field, place screens on assigned front sideline marks, and seat sandbag ballast over rear rail C.
- **Post-Show Sprint:** At the final chord, pairs gently place sandbags on turf and sprint assembled screens directly through the exit gate into the staging lot.

1.2 Staging, Transport & Field Gate Entry

Under Colorado Bandmasters Association (CBA) Rule 5.01 and Rule 5.06, competitive field shows operate within a rigid **15-minute 00-second (900.0-second)** master clock interval:

$$T_{\text{total}} = T_{\text{deploy}} + T_{\text{announce}} + T_{\text{performance}} + T_{\text{egress}} \leq 15:00 \text{ (900 seconds)}$$

- **The Fungible Time Tradeoff:** The 2:00 egress window is an operational planning benchmark, not a hard standalone rule. Shaving time off deployment transfers directly into the egress and performance budget!
- **Rule 5.09 Early Announcement Signal:** A band director may signal the Timing & Penalties judge early once props and performers are set, starting the 35-second announcement ahead of the 3:15 cap.
- **Two-Student Carry Slack Creation:** By deploying in just **55.7 seconds**, the band banks **+139.3 seconds (2 min 19s)** of safety slack, eliminating all egress time anxiety.
- **Rule 5.02 Rear Entrance Mandate:** All screens must enter from the back sideline or rear end zone gates. Never transit props through the front sideline gate.

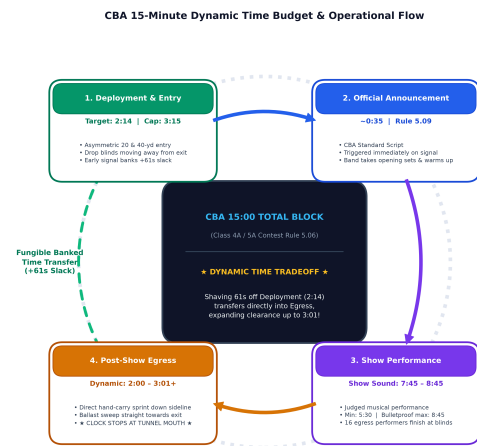


Figure 1: CBA 15-minute time budget dynamic operational cycle.

1.3 Field Deployment Protocol

Stochastic Monte Carlo simulation ($N = 5,000$ randomized trials) establishes Two-Student Carry as the fastest, safest field deployment paradigm:

Deployment Strategy	Mean Time	P95 Time	P99 Time	Success (≤ 3:15)	Operational Status / Notes
Two-Student Carry (16 Pairs)	55.7 s (0:56)	58.3 s	59.7 s	100.0%	★ Primary Standard (+139s buffer)
2 Carts (Pre-Set Receivers)	133.9 s (2:14)	148.5 s	156.6 s	100.0%	Superseded Cart Baseline (+61s)
2 Carts (Mobile Pincer)	198.0 s (3:18)	213.4 s	221.7 s	38.6%	Failed Cart Option (Violates 3:15)
1 Cart (All 16 Screens, 786 lb)	234.1 s (3:54)	263.9 s	280.2 s	0.2%	Infeasible (99.8% Failure Rate)

Pre-Show Deployment Walkthrough (Expected: 55.7s | Rule Cap: 3:15)

- Pre-Staging Lineup:** 16 student pairs carry assembled screens (13 lbs/student) through the rear stadium entrance gate (CBA Rule 5.02) and queue along the back sideline/end zone directly across from their assigned front yard marks.
- The Walk-Across ($T = 0:00$):** On the T&P judge's starting signal, all 16 student pairs walk simultaneously straight across the field in synchronized formation (55 yards at 1.1 yd/s).
- Center-Outward Placement, Alignment & Ballasting ($T = 0:45$ to $0:55$):** Pairs place screens sequentially starting at the center (midfield) position and moving outward to guarantee exact spacing. While waiting for the ballast wagon, pairs sight down the line to achieve flush visual alignment, then seat sandbags (deposited on turf by the wagon walk) over rear rail **C**.
- Clear Field ($T \leq 0:58$):** Student pairs transition directly into opening drill sets. Field is completely clear of prop equipment and adult volunteers in **under 1 minute**, banking **+139 seconds** with **0.0% adult boundary penalty risk!**

1.4 Post-Performance Retrieval & Continuous Exit

At the final chord, student pairs grasp their assembled screens and sprint directly through the exit gate:

Egress Strategy & Venue	Ballast	Mean Time	P95 Time	Success (≤ 2:00)	Operational Status / Notes
Two-Student Carry (Single Exit)	Tier 1	55.1 s (0:55)	61.0 s	100.0%	★ Primary Standard (+65s buffer)
Two-Student Carry (Dual Exit)	Tier 1	35.5 s (0:36)	38.9 s	100.0%	★ Dual-Exit Benchmark (+84s)
Cart Reload Outside Gate	Tier 1	99.9 s (1:40)	113.8 s	98.8%	Superseded Cart Baseline (+20s)
Cart Reload Inside Gate	Tier 1	121.4 s (2:01)	136.7 s	46.7%	Unacceptable Risk (Fails 2:00)
Traditional On-Field Cart Loading	Tier 1	153.4 s (2:33)	171.2 s	0.0%	Catastrophic Failure (100% Fail)

Post-Show Egress Walkthrough (Expected: 55.0s | Benchmark: 2:00)

- Final Show Chord ($T = 0:00$):** Assigned student pairs converge on their screen. Lift ballast sandbags gently to turf next to the rail. **NEVER DROP OR THROW SANDBAGS.**
- The Sprint ($T = 0:05$ to $0:55$):** Grasp upright rails and jog straight down the front sideline corridor directly into the stadium exit chute / tunnel mouth. Field clears in **50–55 seconds.**
- Inward Ballast Sweep:** Two adult duck blind managers and two student ballast handlers enter from off-field with their wagons and retrieve resting sandbags toward the exit gate with zero doubling back.
- Staging Hand-Off & Stage Transit:** Performers jog through the exit gate to the common outside staging area (shared by all props) and hand screens back to adult managers. Managers collapse screens flat and load 4 screens onto each of the 4 stages for transport back to the trucks.

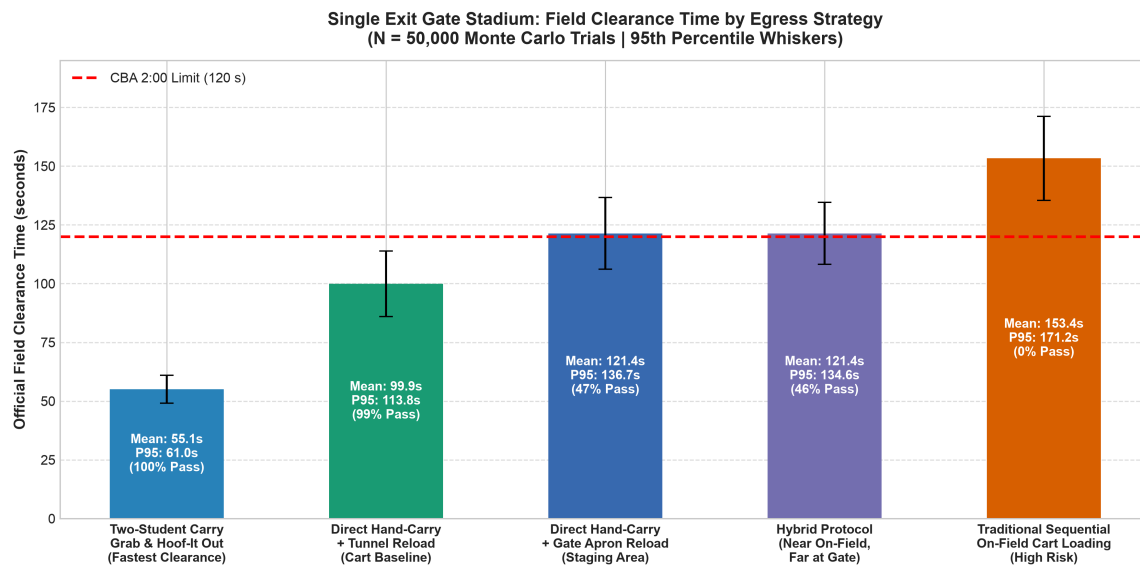


Figure 2: Egress strategy timing comparison (Two-Student Carry vs cart options).

1.5 Ballasting System, Aerodynamic Stability & Tiered Wind Safety Protocols

Aerodynamic pressure ($q = 0.001989 \times V_{\text{mph}}^2$ psf at Colorado Springs 6,500 ft ASL, $\rho = 0.0595$ lb/ft³) creates two distinct failure modes for the 30.5 sq ft screen face ($z_{\text{cp}} = 1.94$ ft):

- **Lateral Turf Sliding** ($\mu \approx 0.35$): The primary operational limit. Smooth steel conduit on crumb-rubber turf slides horizontally **before** tipping occurs. Semicircular slits drop drag by 15% ($C_d = 1.20 \rightarrow 1.02$), raising the Tier 1 sliding threshold from 16.4 mph to **17.8 mph**.
- **Forward Tipping Asymmetry**: Rear wind has an effective unballasted restoring arm of only 4.25 in. ($M_{\text{rest}} = 9.2$ ft-lb), tipping at 8.8 mph. Placing two 15-lb bags over rear ground rail **C** (2.29 ft arm) adds +68.7 ft-lb, boosting tipping resistance to **25.5 mph** with zero clip stress!

Complete Aerodynamic Stability Envelope & Tiered Ballast Schedule

Wind Tier	Wind Velocity	Ballast Configuration	Solid Face (Slide / Tip)	With Slits (Slide / Tip)	Status
Tier 0: Calm	0 – 8 mph	0 bags (dry wt 26 lb)	11.2 / 8.1 mph	12.1 / 8.8 mph	GO (Dry)
Tier 1: Normal	8 – 12 mph	2 bags on rear rail C (56 lb)	16.4 / 23.5 mph	17.8 / 25.5 mph	GO (Normal)
Tier 2: Advisory	12 – 18 mph	3 bags (2 ground C + 1 hang, 71 lb)	18.5 / 28.5 mph	20.0 / 30.9 mph	GO (Ballast)
Tier 3: High-Wind	18 – 22 mph	4 bags (2 ground C + 2 hang, 86 lb)	20.3 / 32.8 mph	22.1 / 35.6 mph	CAUTION
Tier 4: Abort	> 20 sust. > 25 gust	ABSOLUTE NO-GO. Props remain locked in trailer. Do not field props.			NO-GO

● ABSOLUTE WIND NO-GO THRESHOLD (>20 MPH)

Weather Monitoring Protocol: The Prop Lead carries a digital handheld anemometer and monitors decoded airport METAR feeds (KCOS, KFLY, KBJC, KAPA) and Wunderground PWS stations. If sustained winds exceed 20 mph or gusts reach 25–30 mph, props do not enter the performance field.

Without wind relief cuts, the props may be used by derating all wind regimes by 2 mph, decreasing the Tier 4 Abort threshold to 12 mph sustained / 16 mph gusts, and increasing the duck blind Tier 0 ballasting to 2 bags.

1.6 Applicable 2026 CBA Competition Rules

i ANNUAL RULEBOOK NOTICE

This section reflects governing rules for the 2026 competitive season. Staff and build leads must review this section annually against updated CBA and BOA rulebooks to verify continuing compliance.

Rule 4.02: Emergency Assistance & Safety Exceptions

- **Medical Emergency (Rule 4.02(c)): NO PENALTY.** Any band member becoming ill or injured during performance may be assisted from the field by an adult volunteer, parent, staff member, EMT, or CBA official without penalty.
- **High-Wind Prop Safety Restraint (Rule 4.02(a)):** If high winds threaten props falling over, adults may enter the field for the sole purpose of securing the prop. At no time during the performance may an adult move the prop as part of visual choreography.

Rule 4.03 & 5.06: Field Clearance & Adult Turf Penalty

- **Field Clearance Window:** All adult volunteers assisting with props **must be completely clear** of the performance field before the introductory announcement ends (commences 3:15 after entry permission). Any adult still on field when announcement ends incurs an immediate **0.2 point score penalty** for the band.
- **Re-Entry Prohibition:** Adults are strictly prohibited from entering or re-entering the performance field during the show. Unauthorized entry incurs an immediate **0.2 point penalty per occurrence**.

Rule 5.02: Rear Entrance Mandate

- **Gate Ingress Routing:** All props and equipment must enter from the back sideline or rear end zone gates. **Never enter across the front boundary line** (reserved strictly for pit equipment).

Rule 8.05: Props, Equipment, Surface Protection, and Double-Bagging

- **Gate Ingress:** All props and equipment must be designed and of a quantity such that they can be brought onto the Performance Field from the band entrance gate.
- **Continuous Movement:** Following the end of the band's Performance, all props and equipment must be in continuous movement until entirely removed from the stadium.
- **Turf Contact Protection:** All wooden props must be protected with a heavy-duty sustainable plastic product (PVC, Melamine, etc.) where said prop comes in contact with the field surface. Steel props with smooth edges are acceptable without additional protection.
- **Secondary Containment for Sandbags:** Props must not leave holes in the Performance Field surface. Sand bags must be in a secondary container (bucket, double bagged, etc.) that will prevent sand from leaking.

Rule 8.07: Equipment Wheel and Turf Protection Standards

- **Pneumatic-Like Tires:** All instruments and equipment wheeled into the stadium from the entrance gate forward must have pneumatic-like tires that support the weight without damaging turf.

Rule 8.08: Prop Staging Height Restrictions

- **12-Foot Rigid Height Limit:** Staging built and/or used by bands at CBA sanctioned events shall be limited to a maximum total height of twelve (12) feet.

Rule 8.09: Prop Assembly, Timing, and USAFA Falcon Stadium Clearance

- **Falcon Stadium 9'6" Tunnel Rule:** Any prop being used at Falcon Stadium must not exceed 9 ft 6 in. to clear the tunnel entrance. Assembled sideline screens (4 ft height) clear this restriction with over 5 feet of safety margin.

Rule 9.07: Parent Field Access & Wristband Limits

- **25 Field Pass Wristbands:** Access to the field is restricted to Directors/Staff with CBA passes and parents assisting with props/front ensemble with designated Field Pass wristbands (strictly limited to 25 per band).

1.7 Post-Use Teardown, Inspection & Trailer Packout

1. **Continuous Egress & Uphill Transit:** Student pairs jog screens through the exit gate directly to the common outside staging area. Props cannot stop or reload in the exit chute.
2. **"Two-Shot" Competitions (Prelims & Finals Inter-Show Staging):** Between shows, screens remain staged in the trailer lot. If high wind gusts threaten, pull the snap clips (I) and collapse the rear frames flat (under 2.0 in. thick) to eliminate wind sail area while keeping screens ready for rapid re-erection.
3. **Final Teardown De-Ballasting:** Remove sandbags at the truck/trailer only. Stack bags low over truck axles on rubber floor mats.
4. **Collapsing Triangular Frame Flat:** Unclip both 3D-printed hinged arm clips (I) from Lower Inner Rail 3 and swing the rear triangular support frame upward and flat inside the perimeter framing.
5. **Loading Stages & Truck Packout:** Stack four (4) collapsed screens flat onto each of the four (4) mobile stages. Strap securely with ratchet straps and roll stages into equipment trucks.

APPENDIX B

Construction & Fabrication Manual

Conduit cutting, 3D printing, 4-stage frame assembly, vinyl wrapping, and semicircular wind relief flaps

This appendix contains the complete bill of materials, workshop safety standards, 7-stick conduit cutting schedule, 4-stage frame assembly, vinyl tensioning and snap clamping, quality checklist, and component index.

Target Audience:	Band prop construction leads, parent build volunteers, and fabrication teams
Document Contents:	Shop safety; full BOM; 3D-printed parts; 7-stick conduit cut schedule; cost breakdown; 4-stage frame assembly; vinyl mounting; wind relief flap cutting; inspection checklist; indexed purchasing sources
Print / Carry Scope:	All pages labeled B-
Parent Revision:	Release v0 (unreleased) Development build D31 September 2026

Separation Notice: When separated from the master document, keep this cover as the first page of Appendix B.

Appendix B: Construction & Fabrication Manual

2.1 Safety, Work Area & Shop Protocol

- **Eye and Ear Protection:** Wear ANSI Z87.1 approved safety glasses during all cutting, deburring, and drilling operations. Use hearing protection when operating abrasive cutoff saws or reciprocating saws.
- **Cut Conduit Edges:** Freshly cut EMT conduit edges are razor-sharp. Every tube end **must** be thoroughly deburred inside and outside using a reaming tool, half-round file, or dedicated rotary deburring tool before handling or assembly.
- **Clean Staging Surface:** Vinyl installation and banner wrapping **must** be performed over clean moving blankets laid on a flat floor. Never allow scrim vinyl to contact shop grit, gravel, or metal shavings.
- **Fastener Safety:** Self-drilling screws (J) generate sharp metal shavings when penetrating EMT walls. Clear shavings immediately from work surfaces and moving blankets to prevent puncture damage to printed vinyl faces.

2.2 Materials & Component Inventory (BOM)

A single sideline screen requires the following mechanical hardware, commercial clamp brackets, and custom 3D-printed fittings:

ID	Qty	Component Description	Specification / Material	Source / Part Reference
A	4	Long main-frame rails	92.5 in. length, 3/4-in. EMT conduit	Home Depot (SKU 0550110000)
B	2	Main-frame end rails	44.5 in. length, 3/4-in. EMT conduit	Home Depot (SKU 0550110000)
C	1	Rear cross rail	86.5 in. length, 3/4-in. EMT conduit	Home Depot (SKU 0550110000)
D	2	Rear-frame arms	37.0 in. length, 3/4-in. EMT conduit	Home Depot (SKU 0550110000)
E	2	Bottom support arms	27.5 in. length, 3/4-in. EMT conduit	Home Depot (SKU 0550110000)
F	6	3-way corner brackets	3/4-in. EMT clamp bracket	Amazon (B0D5BBKCKG)
G	8	T-brackets	3/4-in. EMT clamp bracket (4 fixed, 4 hinge pivots)	Amazon (B0CKQW11SJ)
H	6	Corner plugs	3D printed, black ASA	Corner Plug.FCStd / STEP
I	2	Hinged arm clips	3D printed, black ASA	Hinged Arm Clip.FCStd / STEP
J	36	Self-drilling screws	8 x 1/2-in. hex washer flange head	Home Depot (Teks 21308)
–	1	Custom banner	13 oz scrim vinyl, 48 in. x 96 in. nominal graphic	Custom print (flush cut)
–	1 roll	Double-sided tape	1-in. heavy-duty mounting tape (16x 4-in. strips)	Amazon (B07BBL4JXJ)
–	16	Greenhouse snap clamps	1-in. pipe clamp clips (fits 0.922 in. OD EMT + vinyl)	Amazon (B0BJJYKZ5L)
–	1 pc	Field Prop Circle Cutter	PCHSMB Circle Cutter arm w/ 11 blade (R = 4.0 in.)	Index [18] / 3D Print

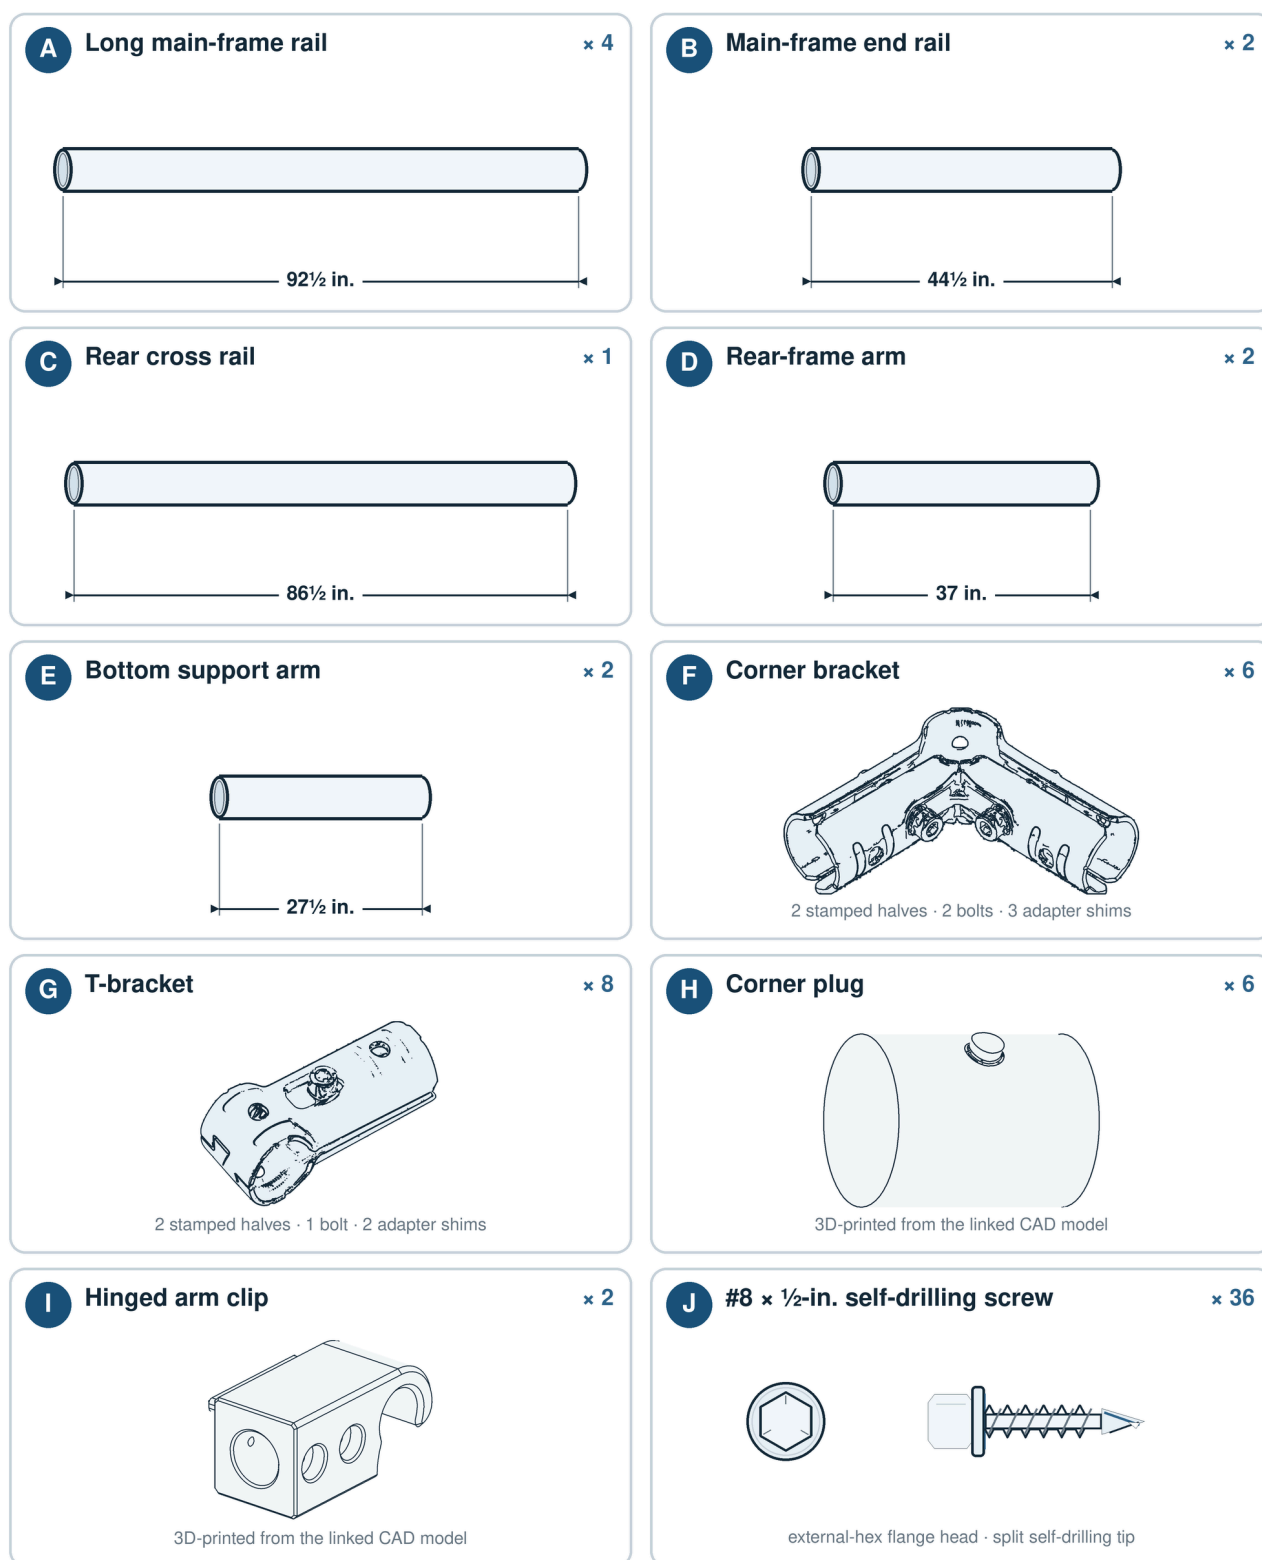


Figure 3: Component inventory for one complete sideline screen frame.

2.3 Tools, Equipment & 3D-Printed Jigs

- Abrasive cutoff saw or tubing cutter
 - Deburring reamer or half-round file
 - Impact driver with 5/16" magnetic hex bit
 - Cordless drill with 1/8" HSS drill bit
 - PCHSMB Field Prop Circle Cutter (Index [18])
- 25-ft tape measure & framing square
 - Soft marking pencil or silver Sharpie
 - 3/8-in. (10 mm) rotary leather punch & mallet
 - Dense end-grain hardwood backing block
 - Moving blankets for clean floor staging

2.4 3D-Printed Parts Specifications

Three critical components are custom-manufactured using fused deposition modeling (FDM):

Corner Plugs (Part H)

- **Quantity:** 6 pcs per screen (96 pcs fleet).
- **Material:** Black ASA (UV/weather-proof).
- **Function:** Press-fits into open unused third sockets of brackets **F** to seal tubes from moisture, wasp nesting, and sharp burr exposure.
- **Print Settings:** 4 perimeters, 25% gyroid infill, 0.20 mm layer height.

Hinged Arm Clips (Part I)

- **Quantity:** 2 pcs per screen (32 pcs fleet).
- **Material:** Black ASA (elastic snap retention).
- **Function:** Fastened to bottom arms **E**; snaps firmly onto lower inner rail **A** (Rail 3) to lock triangular frame rigid on turf.
- **Print Settings:** 6 perimeters, 40% infill, oriented on flat face for maximum hoop strength.

Weight Clips (Optional)

- **Quantity:** 2–4 pcs per screen.
- **Material:** Black ASA.
- **Function:** Snaps over upper inner rail **A** (Rail 2) to suspend secondary ballast sandbags during Tier 2/3 wind conditions.
- **Print Settings:** 6 perimeters, 50% infill, high-tensile hook geometry.

2.5 Raw Material Cutting Schedules

Fabricating one complete screen requires exactly **seven 10-ft sticks of 3/4-in. EMT conduit** (112 sticks for the complete 16-screen fleet). Follow this cut plan to minimize scrap:

Stick #	Cut Elements (Quantity × Length)	Functions & Part IDs	Remainder / Scrap
Stick 1	1 × 92.5 in.	Rail A (Top Outer Rail 1)	27.5 in. spare
Stick 2	1 × 92.5 in.	Rail A (Upper Inner Rail 2)	27.5 in. spare
Stick 3	1 × 92.5 in.	Rail A (Lower Inner Rail 3)	27.5 in. spare
Stick 4	1 × 92.5 in.	Rail A (Bottom Ground Rail 4)	27.5 in. spare
Stick 5	1 × 86.5 in. + 1 × 27.5 in.	Rail C (Rear Cross) + Arm E (Support)	6.0 in. scrap
Stick 6	2 × 44.5 in. + 1 × 27.5 in.	Rails B (Outer Ends) + Arm E (Support)	3.5 in. scrap
Stick 7	2 × 37.0 in.	Arms D (Rear Frame Diagonals)	46.0 in. spare

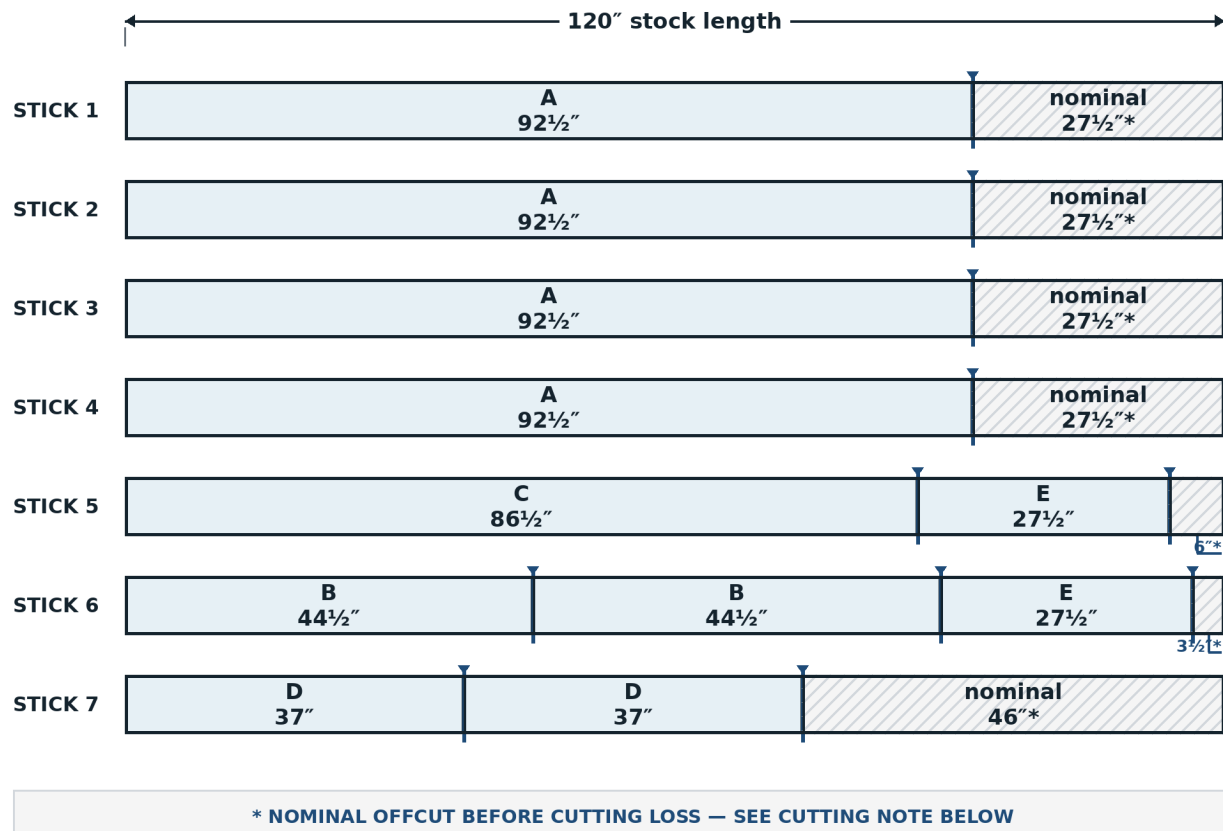


Figure 4: Proportional seven-stick conduit cut diagram.

2.6 Estimated Fabrication Cost Breakdown

Eliminating the transport carts saves **\$440.00** across the program. Fleet construction costs are summarized below:

Per Sideline Screen / Duck Blind (Excl. Vinyl):

Material / Item	Unit Cost
7x 10-ft 3/4-in. EMT Conduit	\$40.50
6x 3-Way Corner Brackets (F)	\$27.00
8x 3/4-in. T-Brackets (G)	\$23.00
36x Self-Drilling Screws (J)	\$4.00
3D ASA Hardware (6H, 2I)	\$10.00
TOTAL PER SCREEN	\$105.00

16-Screen Fleet Production Total:

Fleet Item	Total Cost
16x Sideline Screen Frames	\$1,680.00
Transport Carts (0 built)	\$0.00 (Saved \$440)
TOTAL FLEET HARDWARE	\$1,680.00

Packs: Double-bagged sandbags + hardware: +\$18/screen. Vinyl mounting pack (tape + 16 snap clamps): +\$20/screen.

2.7 Step-by-Step Frame Assembly

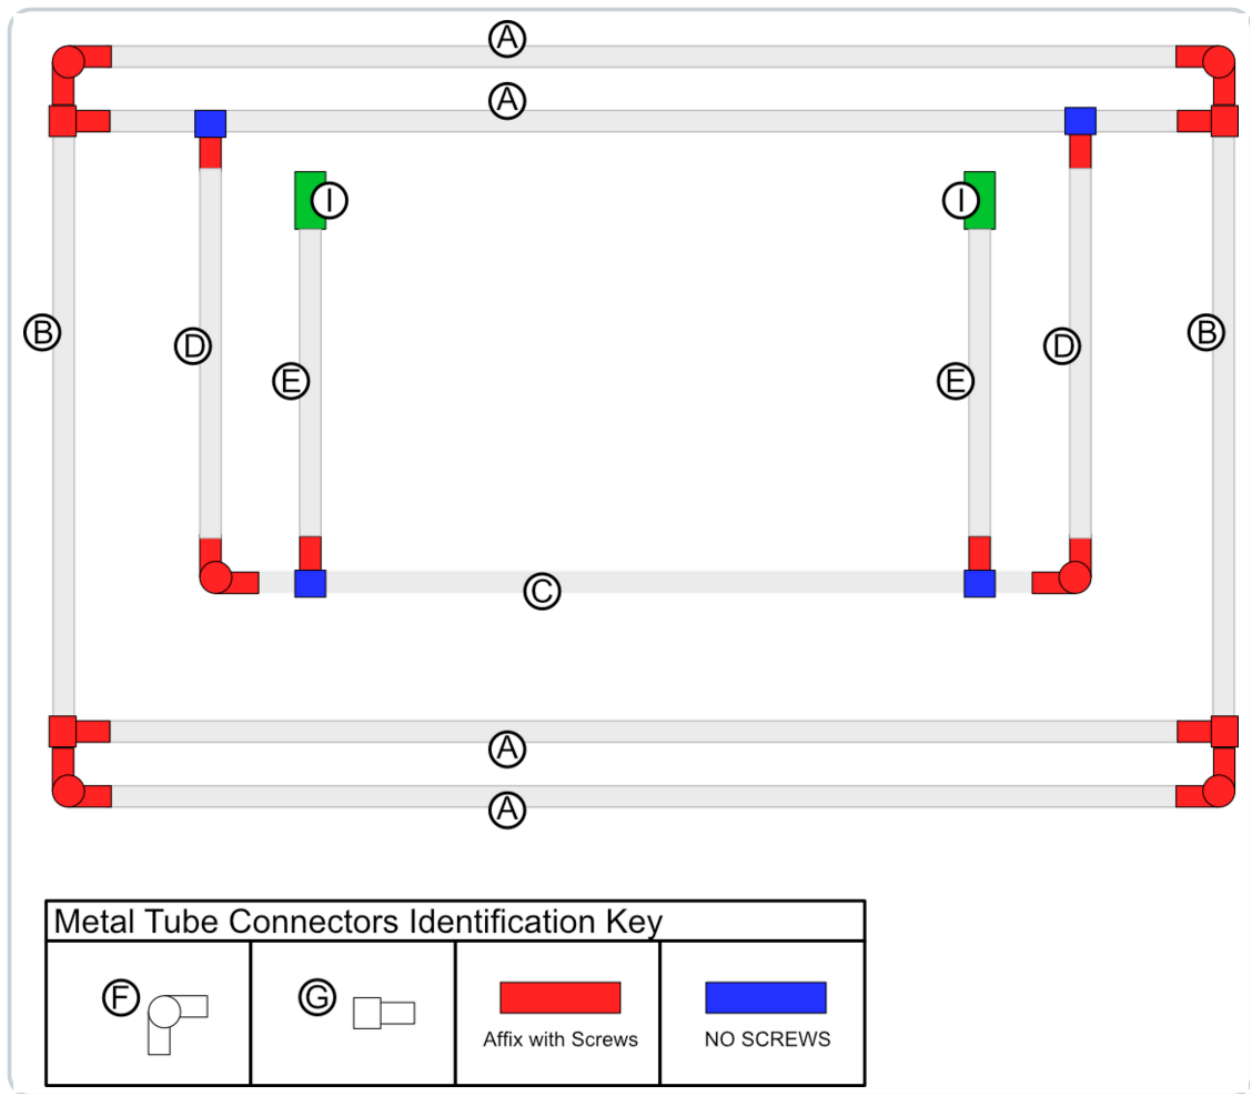


Figure 5: Folded-state component and connector-fastening map for the finished frame.

Fastening Rules & Screw Distribution

Exactly **36 self-drilling screws (J)** are driven per completed screen. **STRICT ASSEMBLY RULE: NEVER DRIVE SCREWS INTO PIVOTING HINGE SLEEVES.**

- **Fixed Joints:** Screws penetrate brackets and conduit to lock geometry rigid.
- **Pivoting Joints (Zero Screws):** The four upper **G** T-brackets rotate freely around the upper inner **A** rail (Rail 2). The two rear **G** T-brackets rotate freely around rear rail **C**. Driving a screw into these sleeves prevents the frame from folding!

Assembly Stage	Screw Count	Target Fastener Locations	Pivoting Interfaces (NO SCREWS)
Stage 1: Main Outer Frame	8 screws	2 screws per corner bracket F into A & B	None
Stage 2: Inner Cross Rails	8 screws	1 screw per G bracket sleeve into A from rear	None
Stage 3: Rear Support Frame	8 screws	4 in corner F brackets; 4 joining D into G	4 upper G sleeves around Rail 2
Stage 4: Bottom Support Arms	12 screws	4 joining E into G ; 8 securing I clips to E	2 rear G sleeves around Rail C
TOTAL FASTENERS	36 screws	All 36 fasteners fully accounted for	Zero screws in 6 hinge sleeves

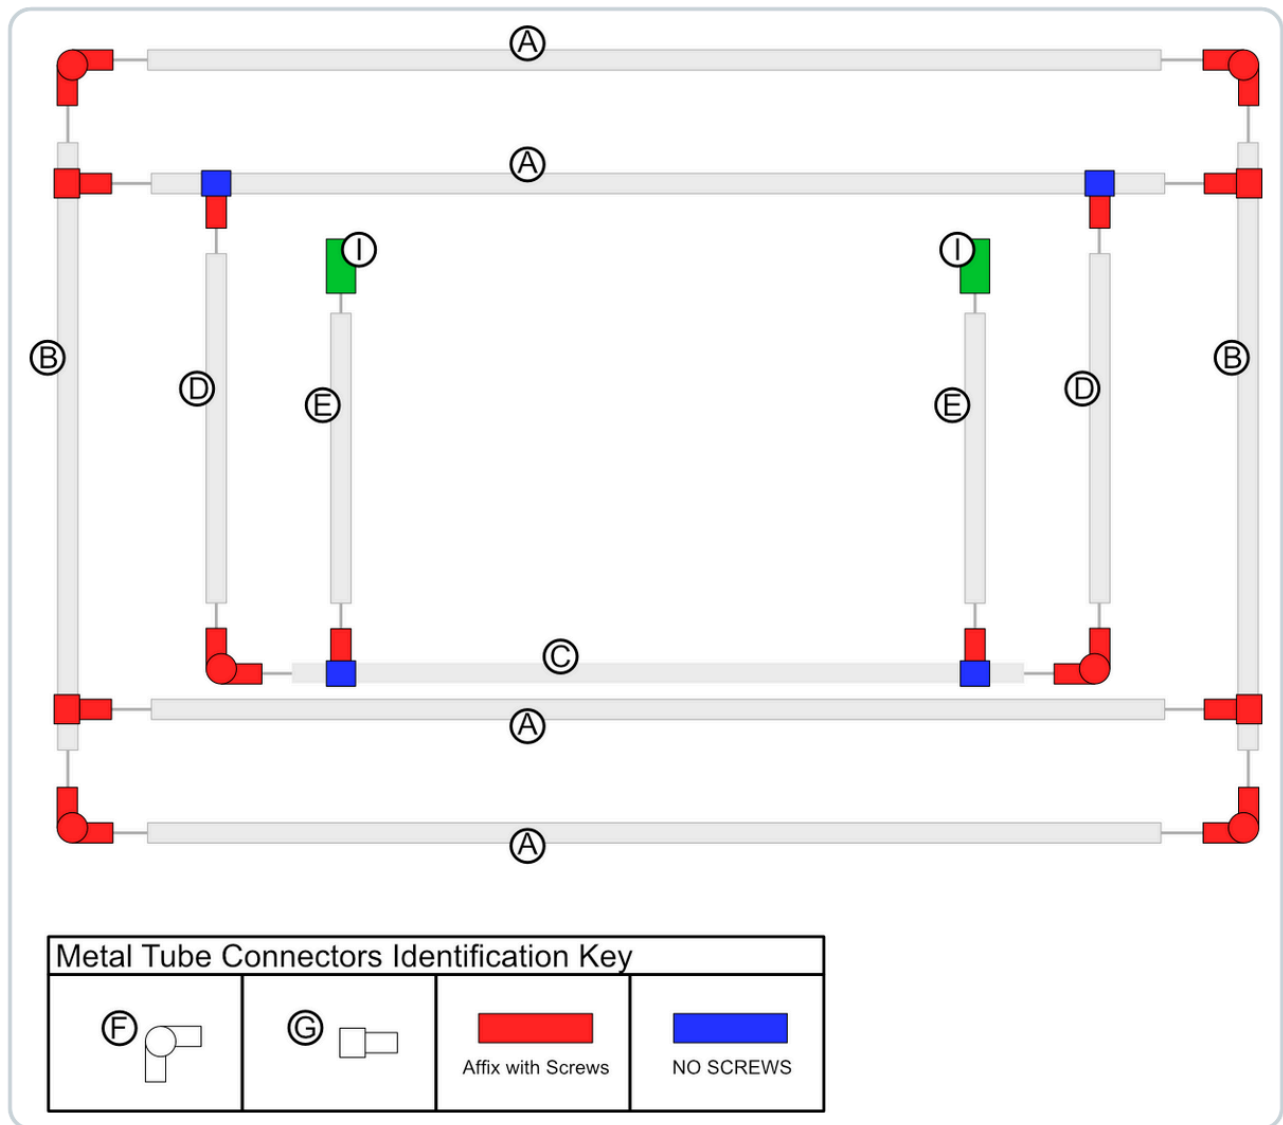


Figure 6: Exploded folded-state component and connector-fastening map.

Stage 1: Assemble the Main Outer Rectangle

1. Lay out two 92.5-in. **A** rails (Top Rail 1 and Bottom Rail 4) and two 44.5-in. **B** end rails on a flat floor.
2. Join corners using four 3-way corner brackets (**F**). Seat tube ends fully against interior bracket stops.
3. Insert four 3D-printed corner plugs (**H**) into the open, unused perpendicular sockets of brackets **F**.
4. Square the frame by measuring diagonal corner-to-corner distances (must match within 1/16 in.).
5. Drive eight **J** screws (one per tube-bracket interface) through bracket pilot holes into conduit walls.

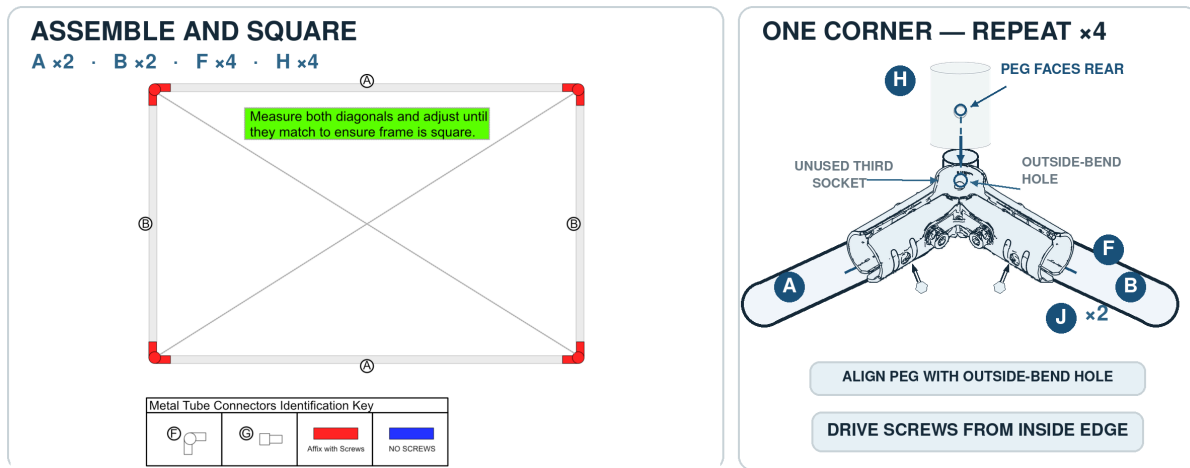


Figure 7: Stage 1 main-frame assembly and corner bracket detail.

Stage 2: Install Inner Cross Rails

1. Mark the vertical **B** end rails for the two inner **A** rails:
 - **Upper Inner Rail 2 (Ballast Hanger Rail):** Centerline exactly **2.5 in. below top outer rail A** ($Y = 42.0$ in.).
 - **Lower Inner Rail 3 (Clip Latch Rail):** Centerline exactly **10.0 in. above bottom outer rail A** ($Y = 10.0$ in.).
2. Slide four T-brackets (**G**) onto the **B** end rails (two per side) aligned with your marks.
3. Seat the two remaining 92.5-in. **A** rails into the T-bracket sockets.
4. Verify parallel spacing across the 92.5-in. span, then drive eight **J** screws from the rear face through the **G** bracket sleeves into the **A** rails (locking them rigid).

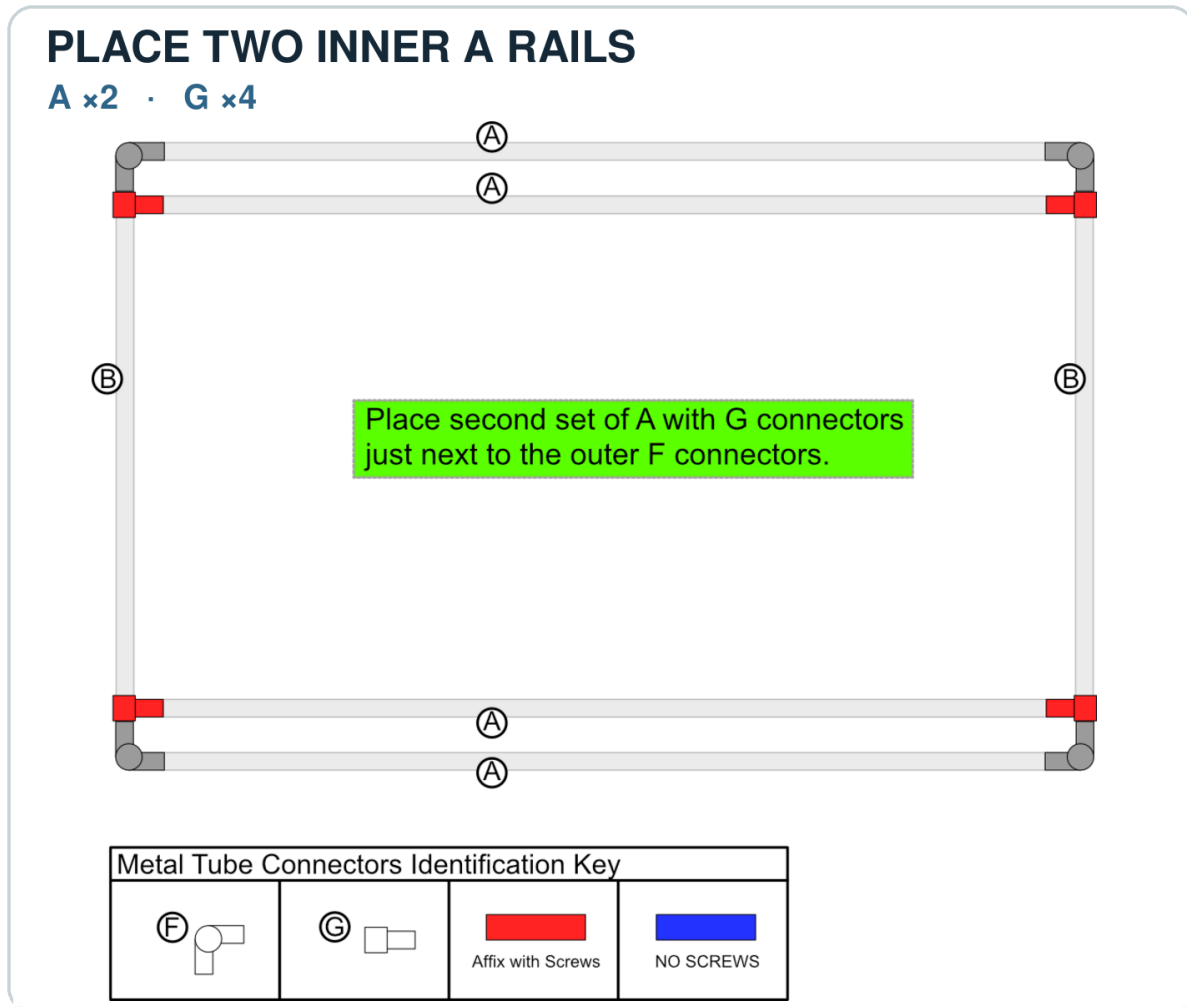


Figure 8: Stage 2 inner-rail placement and T-bracket fastening.

Stage 3: Assemble and Attach Rear Support Frame

1. Slide four T-brackets (G) onto Upper Inner Rail 2 before tightening (two on Left, two on Right). **These brackets act as the upper folding hinges and must rotate freely around Rail 2 with ZERO screws.**
2. Assemble the rear frame: join two 37.0-in. D arms to the 86.5-in. C rear cross rail using two 3-way corner brackets (F). Insert two 3D corner plugs (H) into open bracket sockets.
3. Drive four J screws into brackets F to secure D and C rigid.
4. Insert the top ends of D arms into the hanging sleeves of the four upper G brackets. Drive four J screws through G sleeves into D arms. **Do not screw into Rail 2!**

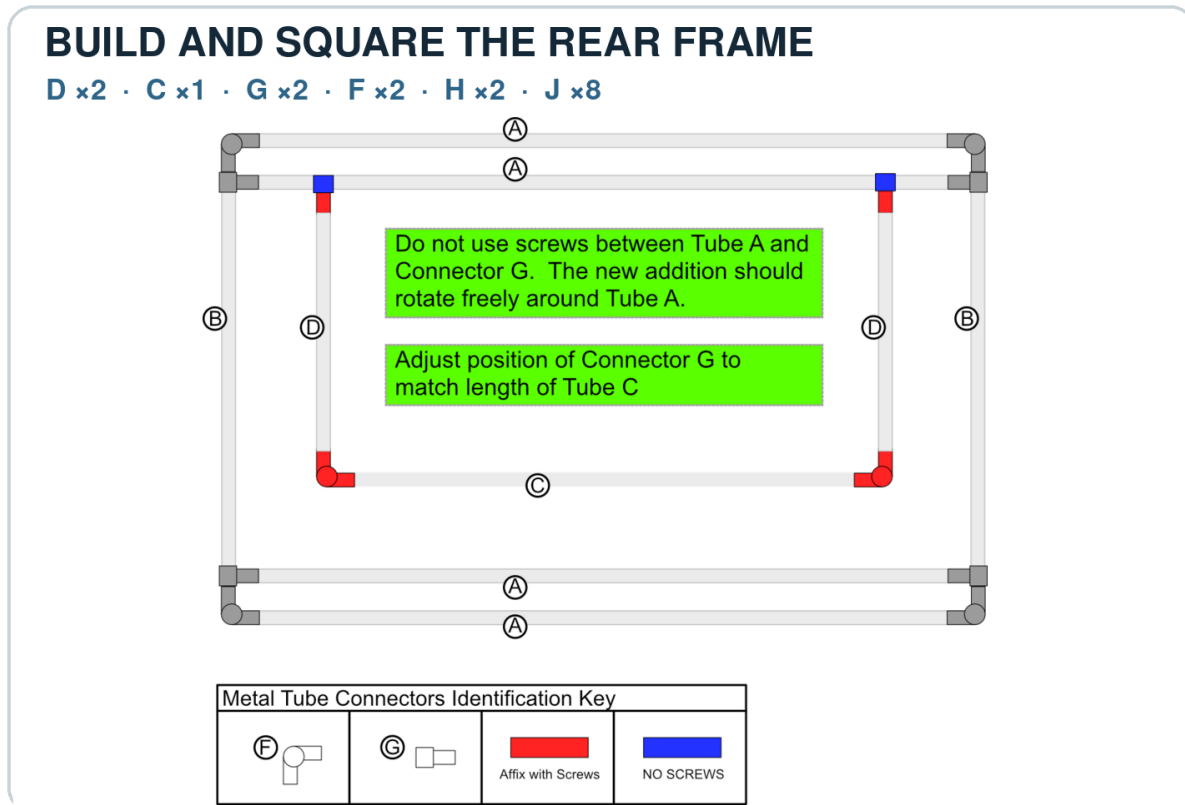


Figure 9: Stage 3 rear-support-frame assembly and hinge fastening.

Stage 4: Install Bottom Support Arms & Snap Clips

1. Slide two T-brackets (G) onto rear rail C. These brackets act as bottom folding hinges and must rotate freely around Rail C with **ZERO** screws.
2. Insert two 27.5-in. E bottom support arms into the sleeves of these G brackets. Secure E to G with four J screws.
3. Slide 3D-printed hinged arm clips (I) onto the free forward ends of arms E. Fasten each clip with four J screws (eight screws total).
4. Swing the completed rear frame down and forward: snap clips (I) must snap firmly over Lower Inner Rail 3 with an audible click, locking the triangular frame into rigid field position.

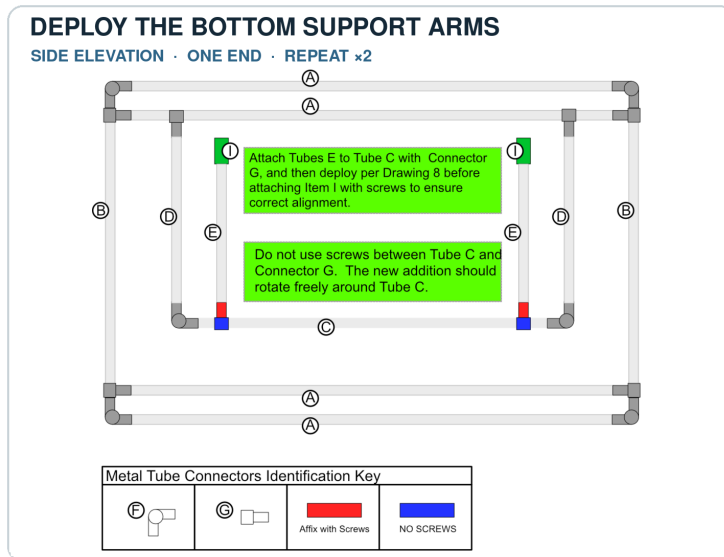


Figure 10: Stage 4 bottom support arm and clip installation.

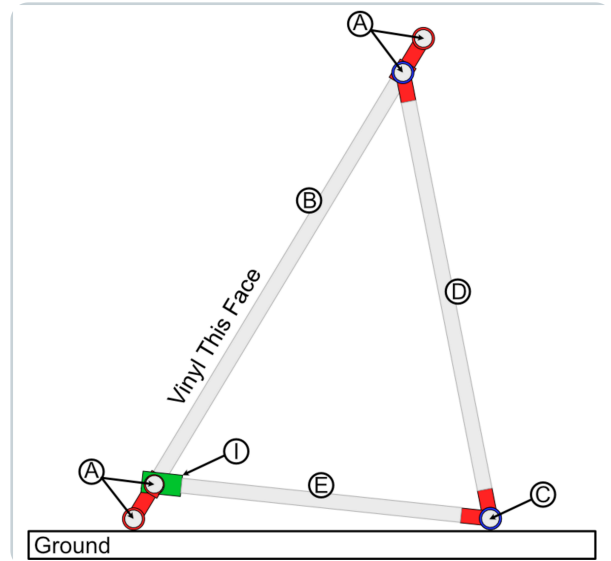


Figure 11: Deployed cutaway side elevation.

2.8 Mechanical Inspection & Quality Assurance Protocol

Before approving a completed frame for vinyl wrapping, verify the following:

☐	Subsystem / Item	Acceptance Criteria & Standard	QC Status
☐	Frame Squareness	Diagonal measurements across outer rectangle match within 1/16 in.	[] Pass [] Rework
☐	Fastener Count	Exactly 36 J screws installed; no loose, stripped, or protruding heads.	[] Pass [] Rework
☐	Hinge Free-Rotation	4 upper hinges on Rail 2 and 2 lower hinges on Rail C rotate smoothly.	[] Pass [] Rework
☐	Clip Lockup	Both 3D clips (I) snap securely over Rail 3 and release cleanly.	[] Pass [] Rework
☐	Coplanar Folding	Rear frame collapses completely flat inside perimeter frame (≤ 2.0 in.).	[] Pass [] Rework

MECHANICAL FRAME QUALITY ASSURANCE SIGN-OFF

Screen Unit ID / Number: _____

Inspection Date: _____

Lead Fabricator (Print): _____

Inspector Signature: _____

Final Disposition: [] APPROVED FOR VINYL MOUNTING [] REWORK REQUIRED (HOLD)

Remediation Notes: _____

2.9 Vinyl Banner Installation & Frame Mounting Protocol

2.9.1 Banner Ordering, Bleed & Material Specifications

- **Face Display Area:** 48.0 in. H × 96.0 in. W nominal (30.5 sq ft actual display face).
- **Cut Banner Dimensions:** 52.0 in. H × 100.0 in. W (provides a 2.0-in. perimeter wrap bleed on all four sides).
- **Material Specification:** 13 oz heavy-duty matte scrim vinyl (outdoor UV-cured inks, flush cut edges, no grommets, no sewn hems).

2.9.2 Step-by-Step Vinyl Tensioning, Wrapping & Clamping Procedure

Shop Clamping & Wrapping Standard

Always execute banner wrapping over clean moving blankets laid on a swept shop floor. Never allow scrim vinyl or printed graphics to contact concrete grit, swarf, or metal filings.

1. **Clean Floor Staging:** Lay moving blankets on floor. Place printed banner face down with the assembled frame centered directly over the 2.0-in. perimeter bleed allowance.
2. **Double-Sided Tape Application:** Cut sixteen (16) 4-in. strips of 1-in. heavy-duty double-sided mounting tape. Apply to the rear-facing surface of outer rails **A** and **B**:
 - **Long Rails A (Top and Bottom):** Apply 5 strips evenly spaced along top rail; 5 strips along bottom ground rail (10 total).
 - **Short End Rails B (Left and Right):** Apply 3 strips evenly spaced along each end rail (6 total).
 - Burnish tape strips firmly to steel conduit, then peel and discard release backing liners.
3. **Long-Side Tensioning & Initial Wrap:** Start along top rail **A**. Fold vinyl bleed margin tightly around conduit and press firmly into the 5 tape strips. Station operators at opposing bottom rail **A**: pull vinyl firmly across frame face to eliminate all slack and wave patterns, wrap bleed over conduit, and press into opposing tape strips. Verify longitudinal face is drum-tight.
4. **Short-Side Dual-Operator Tensioning:** Station operators at opposite short ends (**B** rails). Pull outward simultaneously in opposing directions to establish balanced transverse tension without racking frame out of square. Wrap ends around **B** conduit and press into tape. Neatly fold corner bleed tabs flat over 3-way corner brackets (**F**).
5. **Greenhouse Snap Clamp Installation:** Snap sixteen (16) 1-in. greenhouse pipe snap clamps directly over wrapped vinyl, aligning each clamp precisely over a tape strip:
 - 5 clamps across top outer rail **A**; 5 clamps across bottom ground rail **A**.
 - 3 clamps across left end rail **B**; 3 clamps across right end rail **B**.
 - Confirm clamps are fully seated. Ensure zero mechanical interference with rear folding hinges (**G**) or 3D snap clips (**I**).
6. **Seasonal Removal (>80°F Rule):** **Never attempt to peel vinyl in cold weather.** Cold adhesive becomes brittle, tearing vinyl scrim. Leave frames in direct summer sunlight (>80°F / 27°C) for 10 minutes prior to peeling; heated adhesive releases effortlessly from conduit without residue.

2.9.3 Cutting Engineered Semicircular Wind Relief Flaps

To prevent destructive vortex flutter, reduce peak dynamic overturning impulses during stadium wind gusts, and eliminate lateral sliding across crumb-rubber turf, cut **six (6) engineered semicircular wind relief flaps** into the custom vinyl banner:

Aerodynamic & Mechanical Function of Semicircular Relief Flaps

- **Steady-State Drag Reduction:** Drops drag coefficient from $C_d = 1.20 \rightarrow 1.02$ (15.0% reduction in lateral drag force and overturning moment).
- **Turf Sliding Resistance:** Raises synthetic turf sliding threshold under Tier 1 ballast from 16.4 mph to **17.8 mph**.
- **Vortex Flutter Suppression:** Destroys coherent Strouhal vortex shedding (0.8–1.2 Hz), preventing negative billow suction (>3.0 psf) that pries greenhouse snap clamps off conduit.
- **Tensile Clip Protection:** Reduces tensile pull on 3D-printed hinged arm clips (I) from 33.9 lbs to 28.8 lbs per clip at 20 mph.

Semicircular Geometry Standard ($R = 4.0$ in.)

Each flap is a true semicircle (180° circular arc) measuring **8.0 in. horizontal top chord** × **4.0 in. downward drop** (Radius $R = 4.0$ in.). Vent area is 25.13 sq in. per flap (1.05 sq ft total across 6 flaps, or 3.43% of display face). Semicircular geometry provides superior thermal beam stiffness over elongated ovals, preventing tip curling and sagging in $130^\circ F$ + crumb-rubber heat while sharing 100% tooling commonality with the PCHSMB Backdrop fleet.

6-Flap Fleet Standard Coordinate Schedule (2 × 3 Grid)

Venting is concentrated in the upper zone ($Y = 20.0$ to 34.0 in.) where overturning moment leverage is greatest ($M = F \times y$), while maintaining a 10-inch unvented opaque barrier ($Y \leq 10.0$ in.) to conceal staged floor equipment:

Flap ID	Grid Row	Height (Y)	Center (X)	Punched Endpoints (X)	Apex Clearance
Flap F-1	Row 1 (Upper)	34.0 in.	24.0 in.	20.0 in. and 28.0 in.	30.0 in. to turf
Flap F-2	Row 1 (Upper)	34.0 in.	48.0 in.	44.0 in. and 52.0 in.	30.0 in. to turf
Flap F-3	Row 1 (Upper)	34.0 in.	72.0 in.	68.0 in. and 76.0 in.	30.0 in. to turf
Flap F-4	Row 2 (Lower)	24.0 in.	24.0 in.	20.0 in. and 28.0 in.	20.0 in. to turf
Flap F-5	Row 2 (Lower)	24.0 in.	48.0 in.	44.0 in. and 52.0 in.	20.0 in. to turf
Flap F-6	Row 2 (Lower)	24.0 in.	72.0 in.	68.0 in. and 76.0 in.	20.0 in. to turf

Artwork Protection & The “Floating Flap” Adjustment Rule

- **1-Arcminute Acuity Resolution:** Razor kerf (< 0.01 in.) is 30x smaller than human eye resolution at 30 yards (0.31 in.). Flaps hang 100% flush by gravity and are completely invisible from spectator stands.
- **Floating Allowance:** Centerlines may float horizontally by ± 6 to 12 in. (and vertically by ± 2 to 4 in.) along their row to position flaps into solid backgrounds, dark textures, or negative space.
- **Mandatory NO-CUT Zones:** Flaps must clear student performer faces by ≥ 6.0 in. Never cut across show title typography, movement titles, or Pine Creek school / sponsor crests.

Step-by-Step Punch-First Fabrication Procedure

1. **Tooling Checklist:** Obtain a 3/8-in. (10 mm) rotary leather punch, dense end-grain hardwood backing block, PCHSMB Field Prop Circle Cutter with fresh 11 hobby scalpel blade (Index [18]), and soft marking pencil.
2. **Marking & Graphic Inspection:** Measure and mark top horizontal chord centerlines and endpoint punch marks (8.0 in. apart). Verify compliance with Floating Flap artwork rules.
3. **MANDATORY PUNCH FIRST:** Slide hardwood block behind vinyl directly beneath punch mark. Align 3/8-in. rotary punch over mark and strike firmly with mallet. Repeat for opposing hole (8.0 in. apart). Clean circular holes eliminate stress risers ($K_t \rightarrow 1.0$). **CRITICAL MANDATE: NEVER SLICE WITH RAZOR BEFORE PUNCHING HOLES.**
4. **Scribe & Slice Semicircular Arc:** Insert center pivot pin of PCHSMB Circle Cutter at midpoint between punched holes (or position $R = 4.0$ in. template). Perform a smooth, single-pass cut tangent to the bottom edge of both punched holes down through the 4.0-in. apex.
5. **LEAVE TOP CHORD UNCUT:** **The top 8.0-in. horizontal chord between holes must remain uncut.** This uncut vinyl serves as the permanent gravity hinge.
6. **Flap Inspection:** Verify flap hangs 100% flush under gravity and swings open freely when pushed from behind.
7. **Backlight Pinprick Baffle (Optional):** In west-facing venues (low afternoon sun), apply a 1.5 in. × 1.5 in. square of black Gorilla tape behind each punch hole with a horizontal slit along lower edge to eliminate solar pinpricks.

2.9.4 Seasonal Vinyl Removal & Teardown Protocol

⚠️ CRITICAL TEMPERATURE REQUIREMENT FOR VINYL REMOVAL

Do not attempt removal of the vinyl or adhesive tape unless the ambient temperature is above 80°F (27°C). Attempting to peel the vinyl at lower temperatures will cause the material to tear and permanently damage the custom banner face.

- **Recommended Timing:** Defer vinyl peeling to summer band camp. Cold fall temperatures make adhesive brittle, increasing tear risk.
- **Solar Heating:** Staging frames in direct summer sunlight for 10 minutes softens adhesive for effortless residue-free release.
- **Clamp Removal:** Carefully unclip all sixteen (16) greenhouse snap clamps from perimeter conduit.
- **Peel at Shallow Angle:** Slowly peel vinyl back at a shallow angle. Warm adhesive releases cleanly from EMT conduit.

2.10 Appendix B Index & Purchasing References

Purchase Sources

- [1] **3/4-in. EMT Galvanized Steel Conduit (10-ft lengths)** — Home Depot (SKU 0550110000) <https://www.homedepot.com/p/3-4-in-x-10-ft-Electric-Metallic-Tubing-EMT-Conduit-0550110000/100400409>
- [2] **3/4-in. EMT 3-Way Corner Elbow Brackets (6-Pack)** — Amazon (B0D5BBKCKG) <https://www.amazon.com/dp/B0D5BBKCKG>
- [3] **3/4-in. EMT T-Brackets / Clamps (8-Pack)** — Amazon (B0CKQW11SJ) <https://www.amazon.com/dp/B0CKQW11SJ>
- [4] **8 x 1/2-in. Hex Washer Head Self-Drilling Screws (Tek 21308)** — Home Depot <https://www.homedepot.com/p/Teks-8-x-1-2-in-Zinc-Plated-Steel-Hex-Washer-Head-Self-Drilling-Screws-100-Pack-21308/100145370>
- [5] **1-in. Greenhouse Snap Clamps for 3/4" EMT (16-Pack)** — Amazon (B0BJJYKZ5L) <https://www.amazon.com/dp/B0BJJYKZ5L>
- [6] **1-in. Heavy-Duty Double-Sided Mounting Tape** — Amazon (B07BBL4JXJ) <https://www.amazon.com/dp/B07BBL4JXJ>
- [7] **Abccanopy 15-lb Heavy-Duty Sandbags with Handle (4-Pack)** — Amazon <https://www.amazon.com/dp/B0DFVZDVK>
- [8] **Heavy-Duty Plastic Sandbag Liner Bags (Double-Bag Compliance)** — Amazon <https://www.amazon.com/dp/B0BG3F5XVS>
- [9] **PCHSMB Field Prop Circle Cutter (3D Printed Tooling)** — Custom ASA print with 11 blade <https://github.com/ericrowe/music/tree/main/PCHSMB/Circle%20Cutter>

Digital Part Files & Governing Rules

- [10] **3D Printed Corner Plug (Part H) — FreeCAD Model** https://github.com/ericrowe/music/blob/main/PCHSMB/_Sideline%20Screen/Hardware/Corner%20Plug.FCStd
- [11] **3D Printed Hinged Arm Clip (Part I) — FreeCAD Model** https://github.com/ericrowe/music/blob/main/PCHSMB/_Sideline%20Screen/Hardware/Hinged%20Arm%20Clip.FCStd
- [12] **3D Printed Weight Clip (Optional Ballast Hanger) — FreeCAD Model** https://github.com/ericrowe/music/tree/main/PCHSMB/_Sideline%20Screen/Hardware
- [17] **2026 Colorado Bandmasters Association (CBA) Marching Band Rulebook (PDF)** https://ebf5c7e8-3869-4325-bd98-ce10f57d7545.filesusr.com/ugd/83f67e_cb5fe6efdbdb4ce98f619580f694bc94.pdf
- [18] **PCHSMB Field Prop Circle Cutter Generator & CAD Models** https://github.com/ericrowe/music/blob/main/PCHSMB/Circle%20Cutter/generate_circle_cutter.py

APPENDIX C: FIELD OPERATIONS PLACARD

One-Page Laminated Field Reference for Trained Student Handlers & Parent Pit Crew — Mount on Prop Frame

ATTACH 4" x 6" FIELD PLACEMENT / DRILL CARD HERE (From Appendix C.1)

Screen #: _____ Show Segment: _____ Side: [] Side 1 [] Side 2

Front Sideline Mark: _____ Yard Line: _____ Facing: _____

Assigned Handlers: 1) _____ 2) _____ Ballast: _____

1. Rapid Two-Student Deployment & Egress Checklist

RAPID DEPLOYMENT (Expected: 55.7s):

1. **Queue:** 16 pairs queue along back sideline with screens.
2. **Walk-Across** ($T = 0:00$): Walk straight across field (55 yds).
3. **Placement:** Deposit on front yard mark; align into unbroken wall.
4. **Ballast:** Place sandbags over rear rail **C**. Set drill by **T+0:55**.

RAPID EGRESS (Expected: 55.0s):

1. **Final Chord** ($T = 0:00$): Lift bags gently to turf.
2. **Sprint** ($T = 0:05$ to $0:55$): Grasp uprights; jog down sideline into exit chute.
3. **Wagon Sweep:** Adult wagon teams retrieve resting sandbags.
4. **Trailer Transit:** 4 collapsed screens per stage back to truck.

2. Wind Ballast Schedule (Colorado Springs 6,500 ft ASL)

Tier / State	Wind Velocity	Ballast (15-lb Bags)	Total Wt	Status & Safe Gust Limit
Tier 0: Calm	0–8 mph	0 bags (unballasted)	26 lbs	Safe to 12.1 mph slide / 8.8 tip
Tier 1: Normal	8–12 mph	2 bags on rear rail C	56 lbs	17.8 mph safe slide / 25.5 tip
Tier 2: Advisory	12–18 mph	3 bags (2 on C + 1 hung)	71 lbs	20.0 mph safe slide / 30.9 tip
Tier 3: High-Wind	18–22 mph	4 bags (2 on C + 2 hung)	86 lbs	22.1 mph safe slide / 35.6 tip
Tier 4: ABORT	>20 sust. / >25 gust	—	—	STRICT NO-GO. Keep locked in trailer.

3. Critical Safety & CBA Rules Compliance

- **Adult Turf Penalty (Rule 4.03):** Adults **must stay off turf during performance** (0.2 penalty per occurrence). Adults clear turf before 2:45.
- **Rear Gate Routing (Rule 5.02):** Props must enter strictly from back sideline or rear end zone gates. Never cross front boundary line.
- **Double-Bagging Mandate (Rule 8.05):** All sandbags must have intact inner plastic liners. Zero sand allowed on athletic turf.
- **Continuous Movement (Rule 8.05):** Continuous motion required off field until removed from stadium concourse.

APPENDIX C.1: 4" × 6" FIELD PLACEMENT CARD TEMPLATE

Printable & Fillable Coordinate Card for Appendix C On-Prop Placard (Cut along dashed line)

PCHS MARCHING BAND — SIDELINE SCREEN FIELD DRILL CARD		
Screen #: _____	Segment: _____	Side: [] Side 1 [] Side 2
Front Sideline Mark: _____ Yard Line: _____ Facing: _____ Assigned Student Handlers: 1) _____ 2) _____		
<i>✂ Cut along dashed blue border (exact 6.0" × 4.0" card). Mark prop routes with dry/wet-erase marker, laminate, and attach to placard.</i>		

Field Coordinator & Drill Writer Instructions

- Season Preparation & Card Fabrication:** Coordinate cards are prepared and printed ONCE PER SEASON with static information filled in. Cut out along the 6" × 4" dashed border, laminate, and affix into the Appendix C placard placeholder box using outdoor Velcro coins.
- Competition Day Route Marking:** On competition day, draw the field entrance walk route, coordinate mark, and exit trajectory arrows directly onto the laminated card using a wet-erase marker.
- CBA Field Routing Rules:** Follow all CBA boundary and timing regulations. Enter strictly from rear gates (Rule 5.02). Adults clear turf before 2:45. Maintain continuous egress uphill to staging area.
- Two-Shot Staging Protocol:** During Prelims and Finals breaks, leave blinds staged in lot. If wind increases, unclip arms to collapse flat, eliminating sail area while maintaining readiness.

APPENDIX D: PARENT VOLUNTEER COMPETITION DAY GUIDE & FIELD PROTOCOL

One-Page Operational Guide & CBA Rules Compliance for Pit Crew & Prop Volunteers

Event: _____ Date: _____ Venue / Stadium: _____

1. Volunteer Schedule, Staging Milestones & Call Times

Time Interval	Operational Milestone	Action Items & Checkpoints
Call - 90 min	Truck Arrival & Stage Transport	Unload screens from truck onto 4 stages (4/stage) to transit to common outside staging area. Setup screens, test clips and wind flaps, and load ballast wagons.
Call - 45 min	Staging & Student Rendezvous	Meet student carry pairs (16 pairs) and student ballast handlers (2) at outside staging. Confirm front yard marks. Students take over assembled screens and join wagons.
Call - 15 min	Gate Queue (Back Sideline)	Students carry screens through rear gate to back sideline. Adult & student ballast handlers queue wagons at sideline. Don Rule 9.07 Field Pass wristbands.
T = "0:00"	Permission to Enter	Wagon teams deposit ballast along sideline corridor; students walk across (55s) and place ballast on blinds. Adults clear turf by 2:45.
Show Run	Performance Standby	STAY OFF TURF. Stand by outside front boundary in volunteer waiting area for entire performance (Rule 4.03).
Final Chord	Egress & Ballast Sweep	Students leave bags on turf and sprint screens to outside staging (55s). Wagon teams sweep resting sandbags into wagons.
Post-Show	Staging Hand-Off & Stage Reload	Students hand blinds and wagons to managers at outside staging and depart together. Managers collapse screens flat, load 4 onto each stage, and return to trucks.

2. 2026 CBA Marching Band Rules Governing Adult On-Field Behavior

- **Mandatory Field Pass Wristbands (Rule 9.07):** Access to the performance field for parents assisting with props is strictly restricted to designated Field Pass wristbands (max 25 per band). Wristbands permit access ONLY to the Performance Field.
- **Field Clearance Before Performance (Rule 4.03 & Rule 5.06):** All adult volunteers assisting with props **must be completely clear** of the performance field before the introductory announcement ends. Any adult still on field incurs an immediate **0.2 point score penalty**.
- **Re-Entry Prohibition During Performance (Rule 4.03):** Adults are strictly prohibited from entering or re-entering the performance field during the show (0.2 penalty per occurrence).
- **Continuous Uphill Egress & Double-Bagging (Rule 8.05):** Continuous movement required off field until removed from stadium concourse. All sandbags must have intact plastic inner liners.