



TYPE CVT VACUUM ON-LOAD TAP CHANGER FOR DRY TYPE TRANSFORMER

Shanghai Huaming Power Equipment Co.,Ltd.



TYPE CVT VACUUM ON LOAD TAP CHANGER FOR DRY TYPE TRANSFORMER



Vacuum On-Load Tap Changer type CVT consists of tap selector and diverter switch. The tap selector selects taps in the condition of not making or breaking current, then the diverter switch performs load switching. The diverter switch employs vacuum arc extinguishing chamber in which current is switched. Therefore the tap changer can provide reliable operation and long service life.

Vacuum On-Load Tap Changer type CVT is applicable to dry type transformer with voltage of 12kV and below, the maximum rated through current of CVT is 160 amps, maximum operation positions is 9 in linear regulation only, it can be used for star or delta connection.

Vacuum On-Load Tap Changer type CVT is controlled by automatic voltage controller type HMJK-10Z to perform auto or manual operation.

CVT Technical Data

No	Type			CVT
1	Number of phase			3-phase, 1-phase
2	Maximum rated through current (A)			160
3	Short circuit current test (kA)	Thermal stability (3s)		3
		Dynamic stability (peak value)		7.5
4	Connection			Y- neutral point D-any connection
5	Maximum step voltage (V)			500
6	Maximum rated step capacity (kVA)			80
7	Rated frequency (Hz)			50/60
8	Max. operation positions			9 Linear regulation only
9	Insulation level (kV)	To ground	The highest voltage for equipment	12
		To ground and between phases	Rated separate source AC withstand voltage (kV/50Hz,1 min)	35
			Rated lightning impulse withstand voltage(kV,1.2/50μs)	85
		Between adjacent taps	Rated separate source AC withstand voltage (kV/50Hz,1 min)	5
			Rated lightning impulse withstand voltage(kV,1.2/50μs)	20
		Across the tap winding	Rated separate source AC withstand voltage (kV/50Hz,1 min)	15
			Rated lightning impulse withstand voltage(kV,1.2/50μs)	50
10	Motor		Power (kW)	0.37
			Voltage (V)	220V AC
			Rated current (A)	2.68
			Rated frequency (Hz)	50 or 60
11	Time for one operation (second)			4.4
12	Electrical life (operations)			Not less than 300,000
13	Mechanical life (operations)			Not less than 800,000
14	Overall dimensions (length*height*width) (mm)			1400 × 1475 × 475
15	Net weight (kg) approx			200


Note:Please contact with us for special requirement



TYPE CVT VACUUM ON LOAD TAP CHANGER FOR DRY TYPE TRANSFORMER

Explanation of Type

CVT III- 160 □ / 12 - 09 09

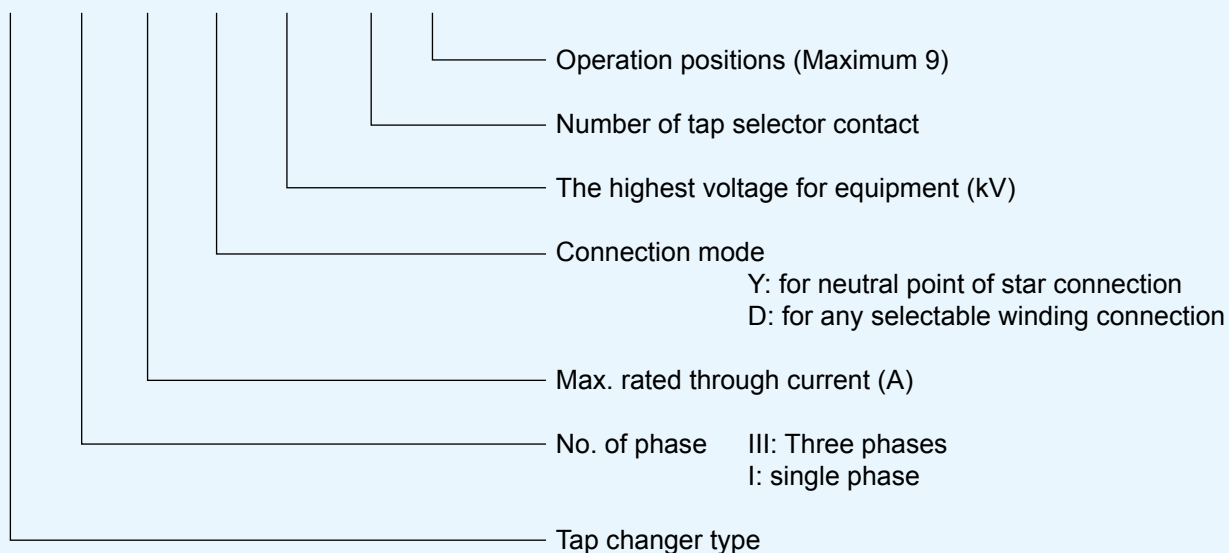

Shanghai Huaming Power Equipment Co., Ltd.

Address: No 977 Tong Pu Road, Shanghai 200333, P.R.China

Tel: +86 21 5270 3965 (direct)

+86 21 5270 8966 Ext. 8688 / 8123 / 8698 / 8158 / 8110 / 8658

Fax: +86 21 5270 2715

Web: www.huaming.com

E-mail: export@huaming.com