


REVISIONS			
LTR	DESCRIPTION	DATE	APPVD
A	INITIAL RELEASE NUM: <i>R 2001-288</i>		

CONTACT LOCATION			
CONTACT ID	LOCATION		CONTACT TYPE
	X	Y	
1	.067	.412	20
2	.194	.372	20
3	.305	.281	20
4	.310	.146	20
5	.412	.060	20
6	.409	-.074	20
7	.311	-.169	20
8	.289	-.302	20
9	.124	-.397	20
10	0	-.347	20
11	-.124	-.397	20
12	-.289	-.302	20
13	-.311	-.169	20
14	-.409	-.074	20
15	-.412	.060	20
16	-.310	.146	20
17	-.305	.281	20
18	-.194	.372	20
19	-.067	.412	20
20	.126	.200	12
21	.264	-.003	16
22	.125	-.207	12
23	-.125	-.207	12
24	-.264	-.003	16
25	-.126	.200	12
26	.088	-.003	16
27	-.088	-.003	16

CONTACT IDENT	CONTACT SIZE	QTY	SERVICE RATING
	16	4	I
	12	4	I
	20	19	I

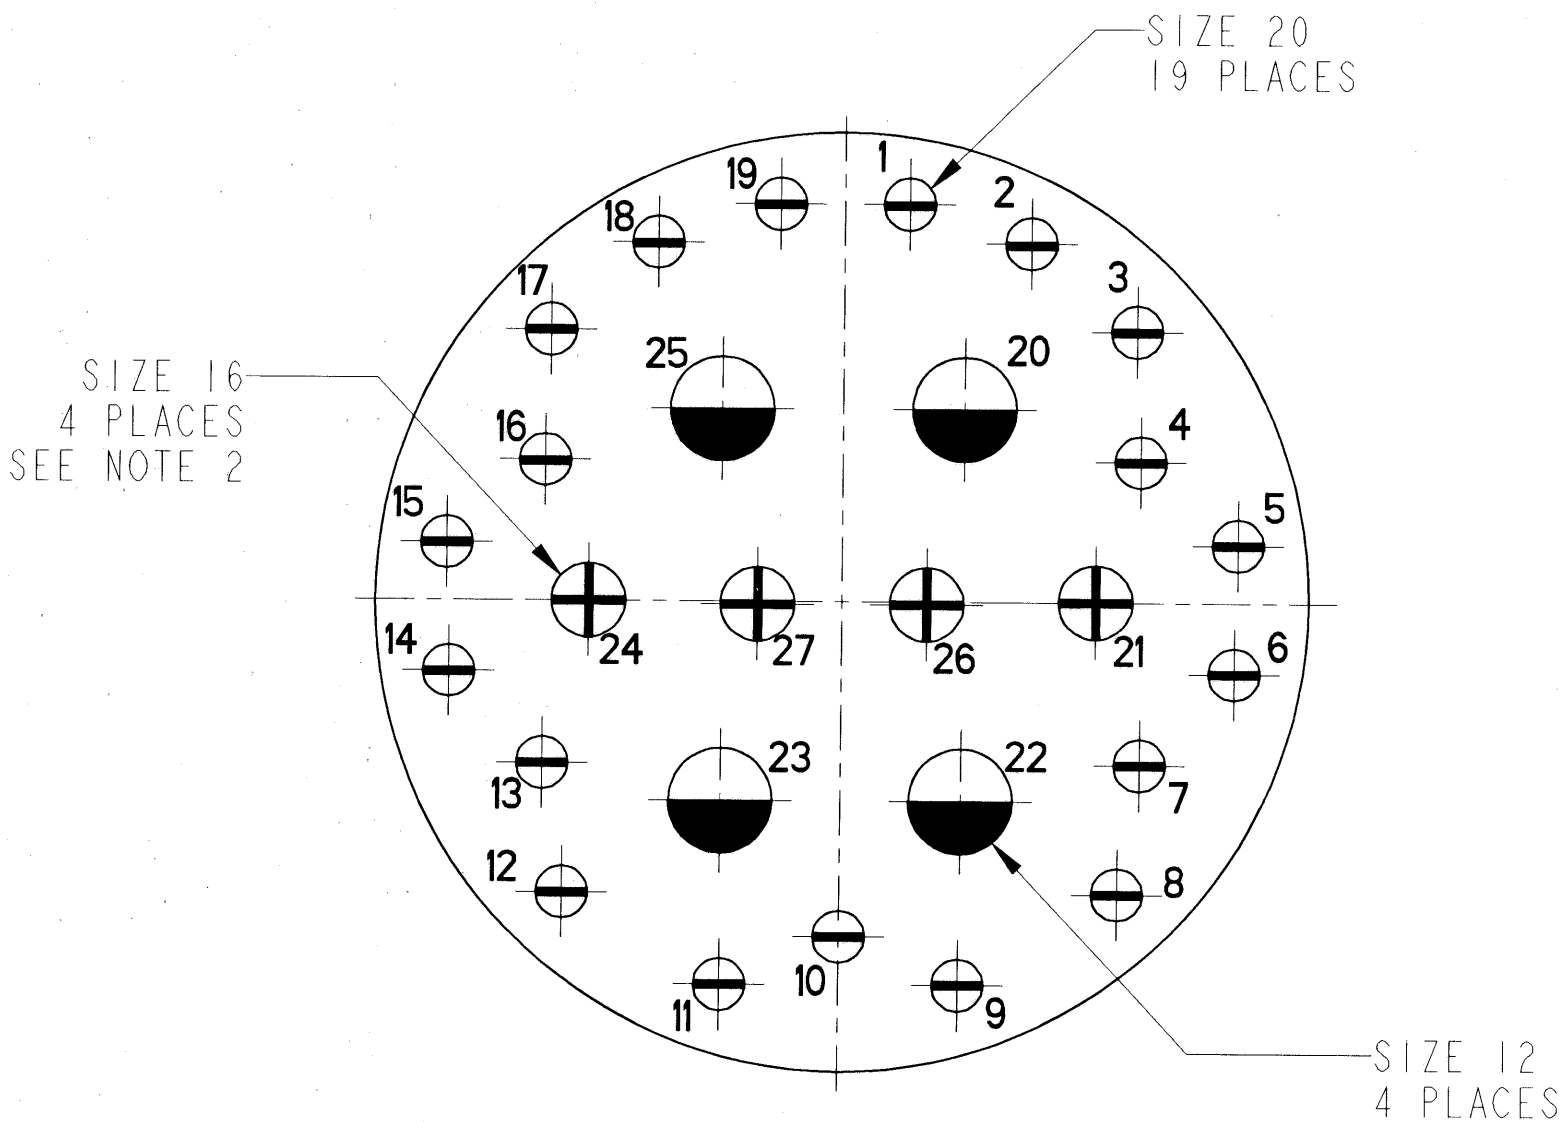

FRONT OF PIN INSERT  
REAR OF SOCKET INSERT  
REAR OF SOCKET GROMMET

21-29

2. NOTE THAT THE 4 SIZE 16 CAVITIES ARE NOT LOCATED ON THE CENTERLINE OF THE ARRANGEMENT. THEY ARE POSITIONED .003 BELOW THE CENTERLINE.

1. UNLESS OTHERWISE SPECIFIED ON APPLICABLE DRAWING, TRADEMARK & 21-29 ARE TO APPEAR IN AVAILABLE SPACE. CONTACT IDENTIFYING LETTER TO BE LOCATED SO AS TO IDENTIFY RELATIVE CONTACT.

NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED. HOWEVER, DOCUMENTS REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.

N/A

N/A

NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED	SPECIFICATIONS	POS	QTY	PART NUMBER	DESCRIPTION	NOTE		
		PARTS LIST						
LINEAR DIMENSIONS ARE IN INCHES TOLERANCES: .XXXX = ±.0005 .XXX = ±.010 .XX = ±.03 .X = ±.1 ANGLES = ±2° OTHER STANDARDS PER 9-3800 AND DOD-D-1000 THIRD ANGLE PROJECTION	MATERIAL SPEC.  N/A	APPROVALS		DATE	AMPHENOL CORPORATION SIDNEY, N.Y. 13838			
		PREPARED C. WESTRICK		8-DEC-00				
	PROCESS SPEC.  N/A	CHECKED	D. Alger	8/14/01	INSERT ARRANGEMENT SIZE 21, ARRANGEMENT 29 19-20, 4-16, 4-12			
		MATERIAL	NA and					
	PROCESS SPEC.  N/A	APPROVED	D. Ziem	9/14/01	SIZE C	FSCM NO. 77820	DOCUMENT NO. L-15221-29	REV. A
		APPROVED	Al Davis					
		PRO/ENG INFORMATION L-40450-SIZE-21.PART L-15221-29				SCALE: 10.0		REF: L-15219-31

FAMCODES DATA3:

CICS: