


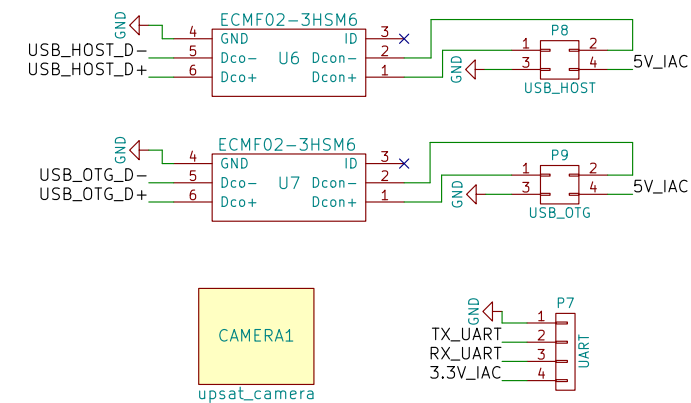
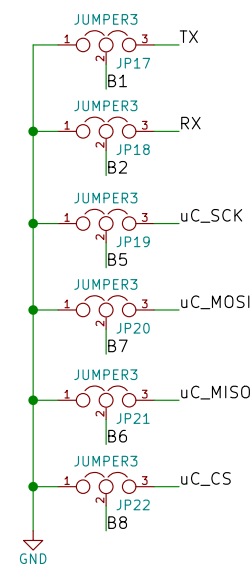
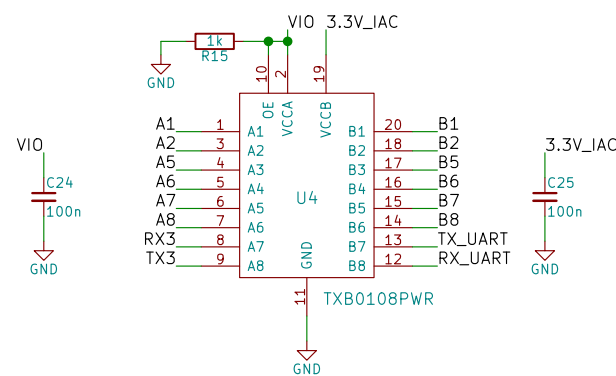
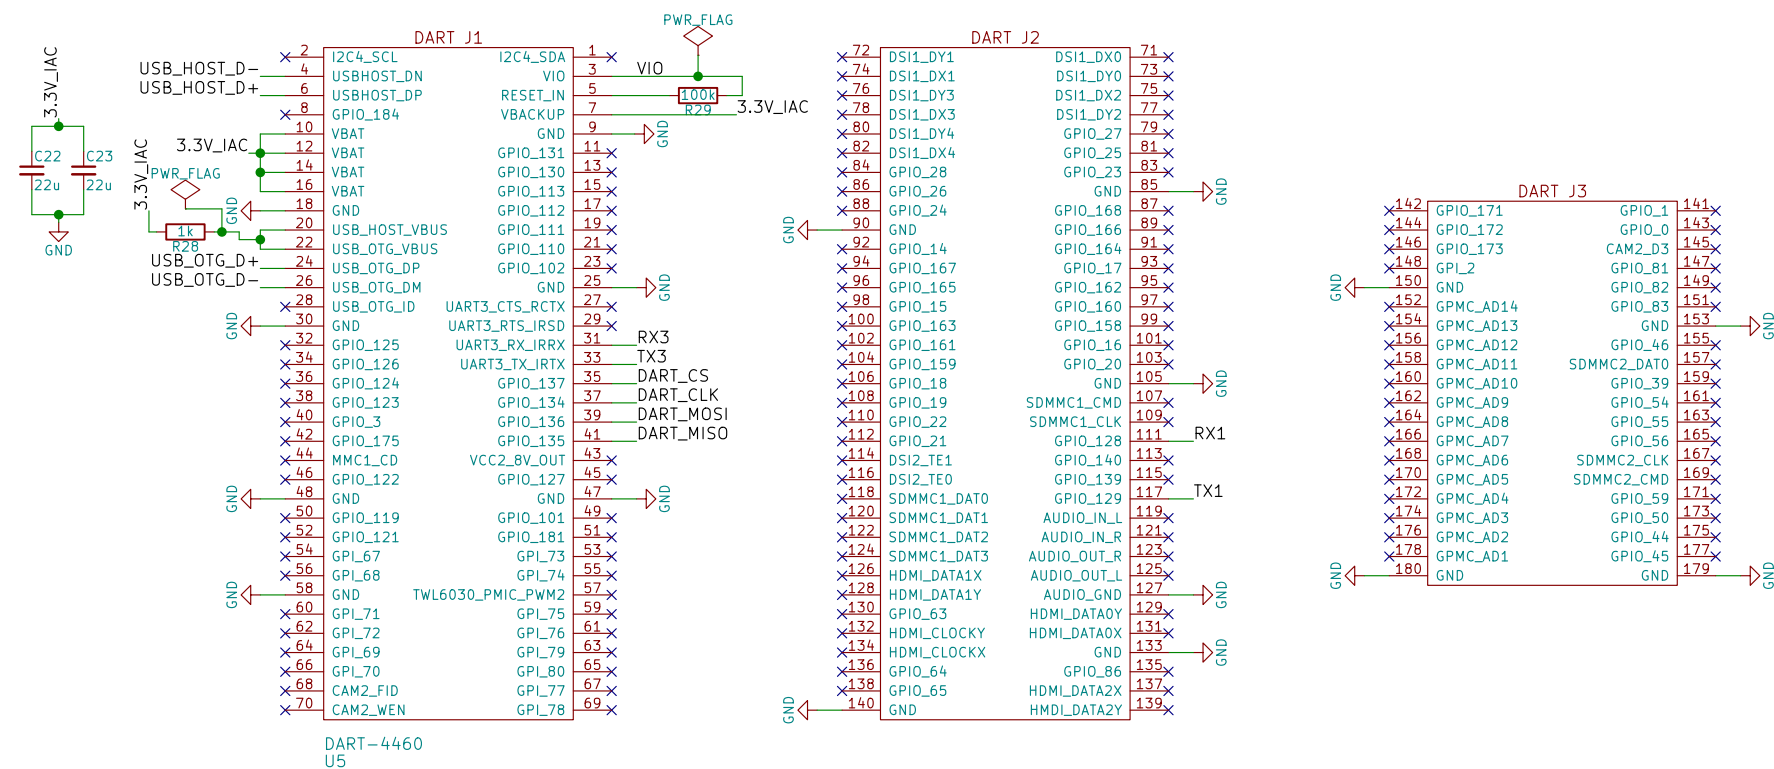
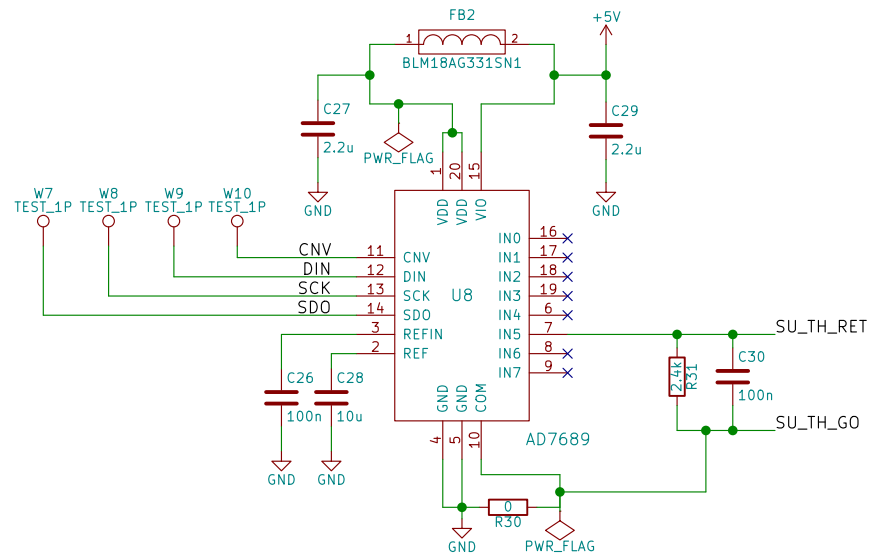


The A and B sides of an unused data I/O pair must be held in the same state, both at GND.



Use SPI or UART.
SPI should be used for DART.





Sheet: /SU/
File: su.sch

Title:

Size: A4
KiCad E.D.A. kicad 4.0.2-stable

Date:

Rev:
Id: 3/3