Order guide

T	XC	K	-	H7	-	3030	-	L50	-	LA
Major category	Category	Series		① Surface Treatment		② Specification		③ Length		④ Optional processing

◉ Please refer to the series code to select the type and parameters for ordering.

Code	Material	Surface Treatment ①
TXCK-H7	A6063-T5	Black Sandblasting Oxidation
TXCK-H6		Natural Sandblasting Oxidation

◉ No surface treatment on cut surfaces
◉ Maximum usable length: 5800~5850mm; Standard full length: 6000~6020mm.
◉ Custom surface treatment is available.

○ Length Tolerance: L ⩽ 1000mm



◉ (When L > 1000mm, length tolerance ±0.5mm)

○ Slot Detail

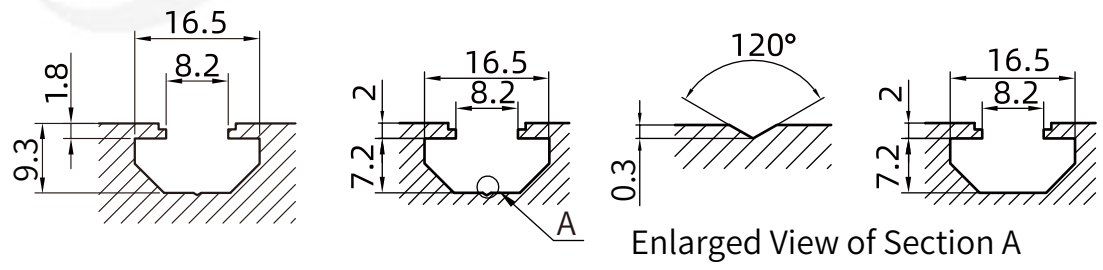

Enlarged View of Section A

Lightweight | Standard | Heavy Duty

Features: The profile has a slightly thinner wall to save material costs and is suitable for lighter load consumer applications.

TXCK-H6-J3030



TXCK-H6-J3030A



TXCK-H6-J3030B



TXCK-H6-J3030G



TXCK-H6-J3030H



TXCK-H6-J3030T



TXCK-H6-J3030R



TXCK-H6-J3030RS



TXCK-H6-J3060

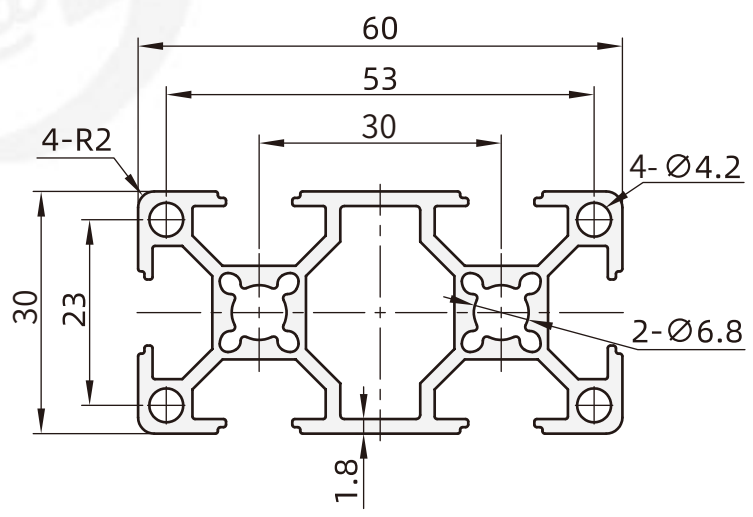

TXCK-H6-J3060G

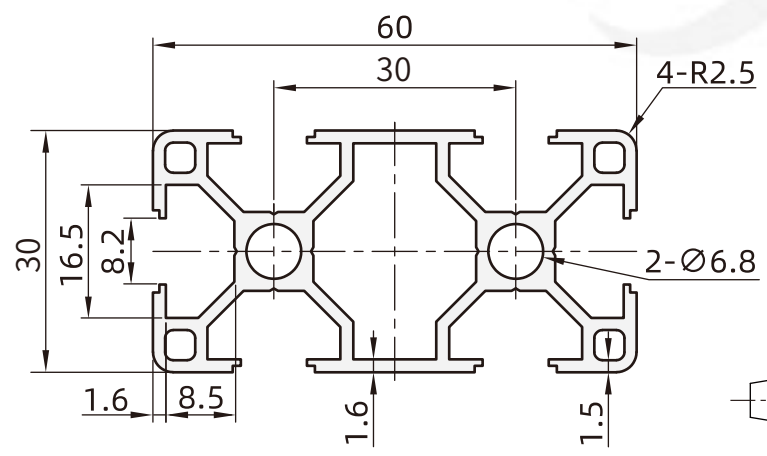



Visual standards: first perspective

Lightweight | Standard | Heavy Duty

Features: The profile has a slightly thinner wall to save material costs and is suitable for lighter load consumer applications.

TXCK-H6-J3060A

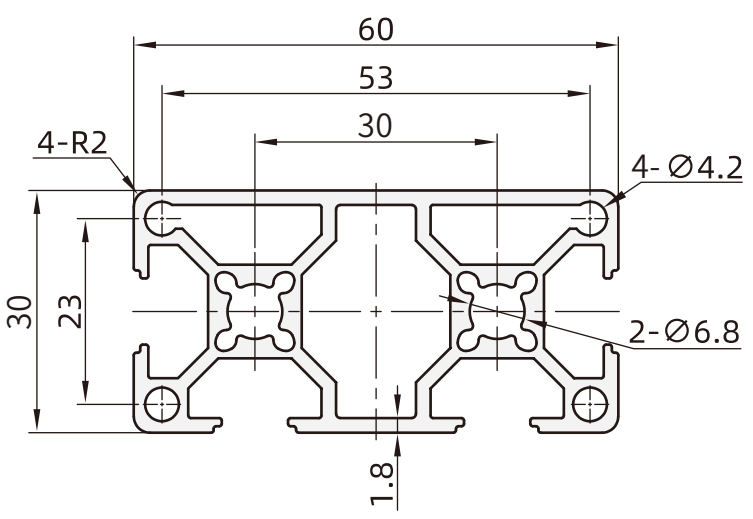

TXCK-H6-J3060B

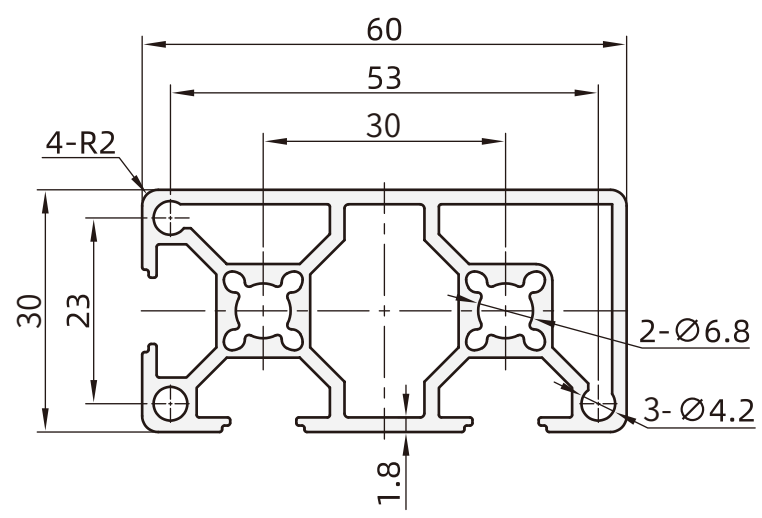

TXCK-H6-J3090

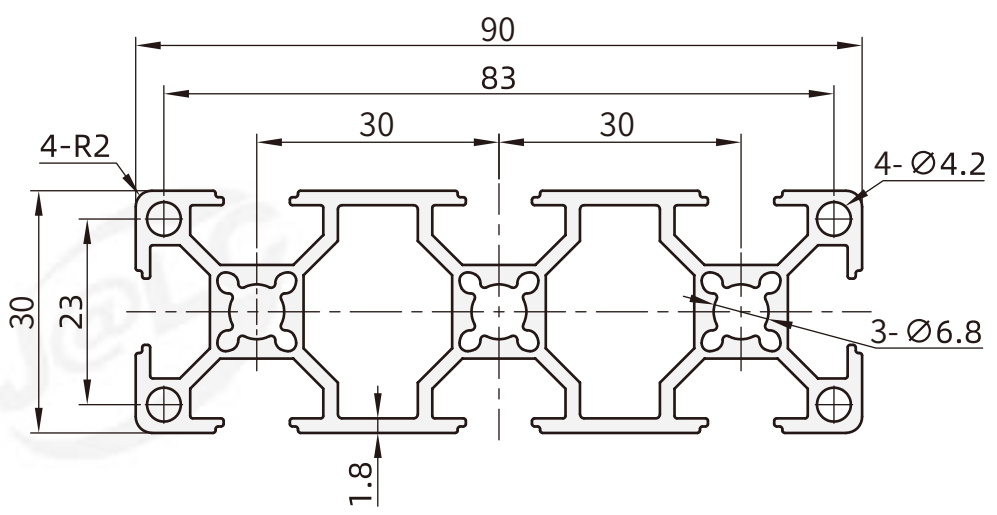

TXCK-H6-3030C



TXCK-H6-J6630RA

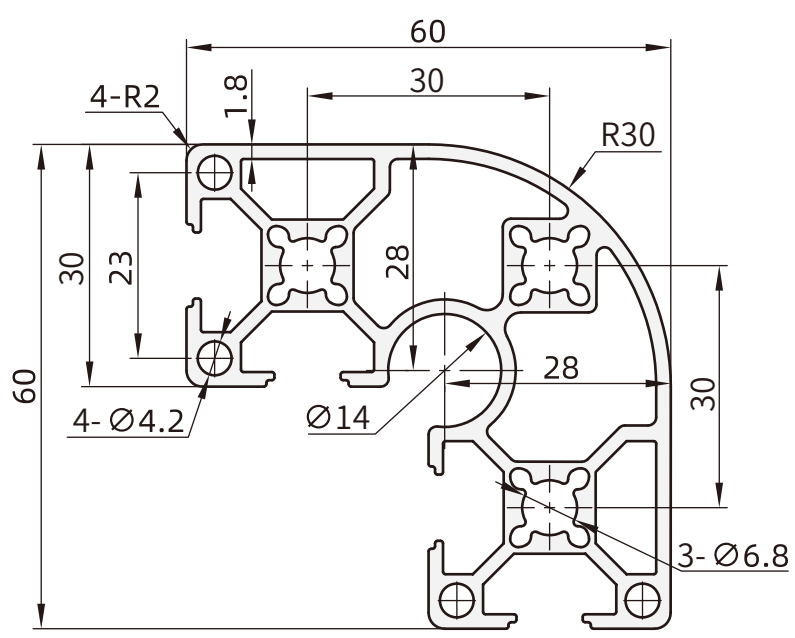

TXCK-H6-J6630R

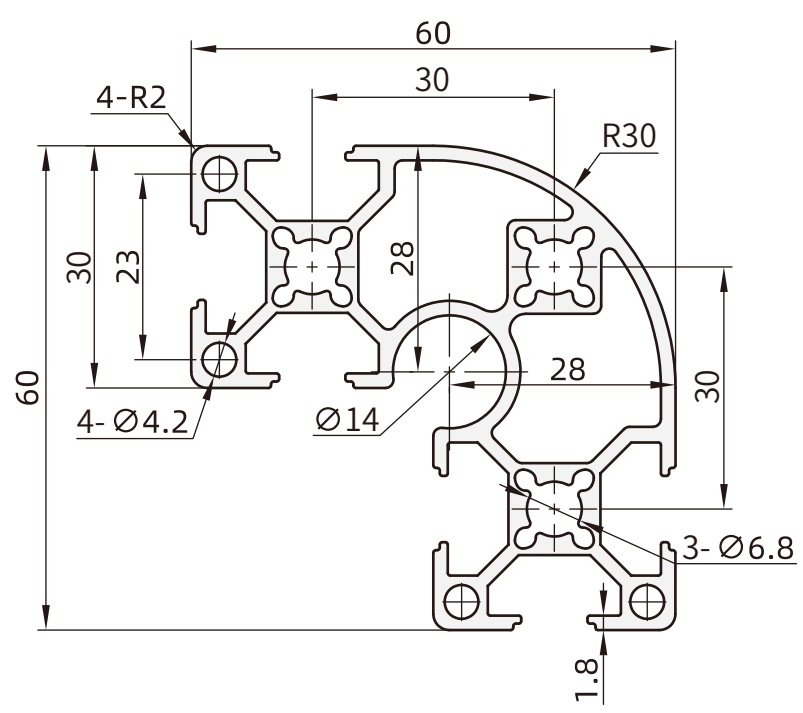

TXCK-H6-J6060S

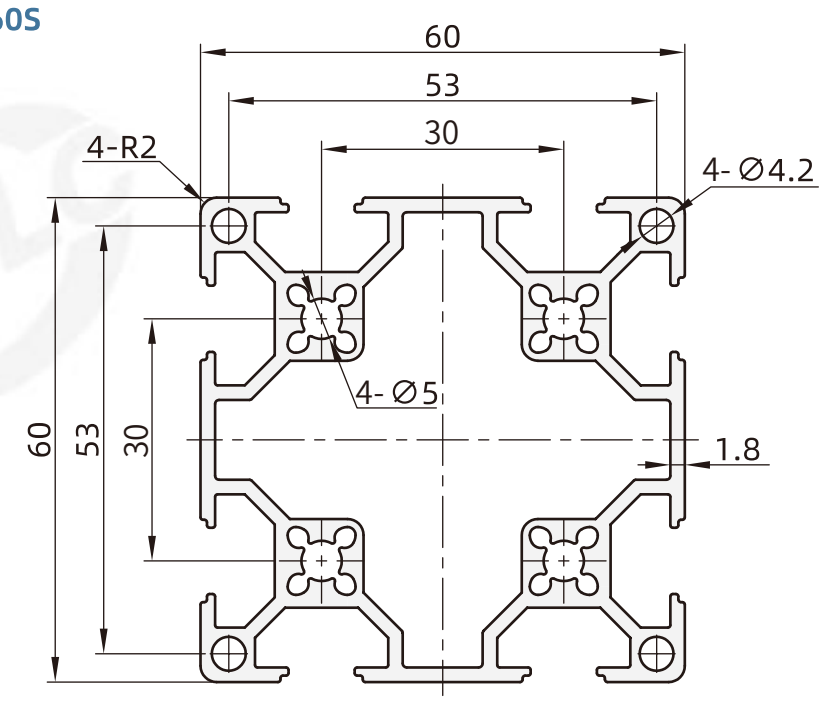

TXCK-H6-J6060

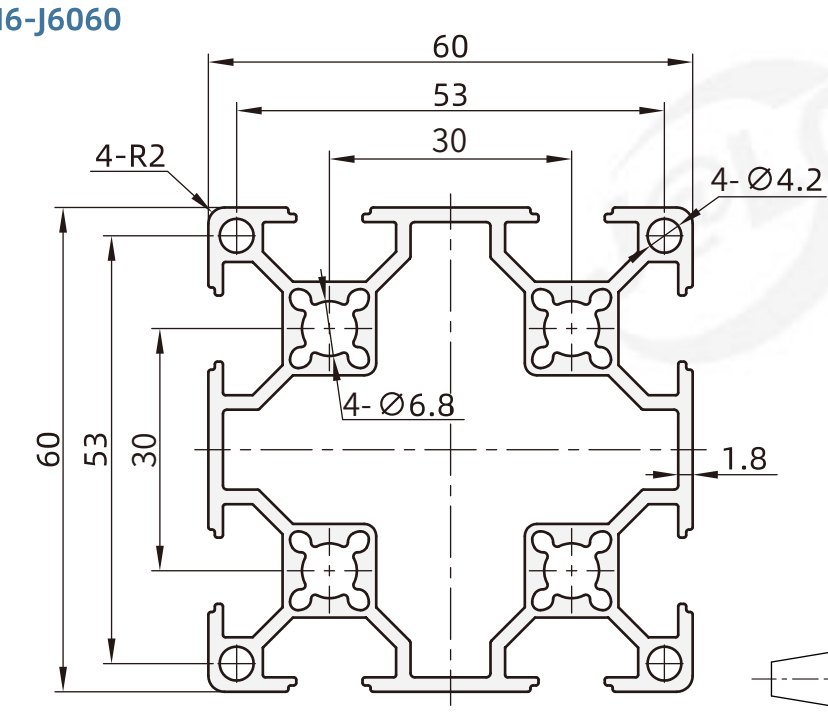



Visual standards:
first perspective

Euro Standard 30 Series

Lightweight | Standard | Heavy Duty

Features: The profile has a moderate wall thickness suitable for general load requirements.

TXCK-H6-3030
TXCK-H7-3030 (Black)



TXCK-H6-3030A



TXCK-H6-3030B



TXCK-H6-3030R
TXCK-H7-3030R (Black)



TXCK-H6-3045M



TXCK-H6-3060
TXCK-H7-3060 (Black)

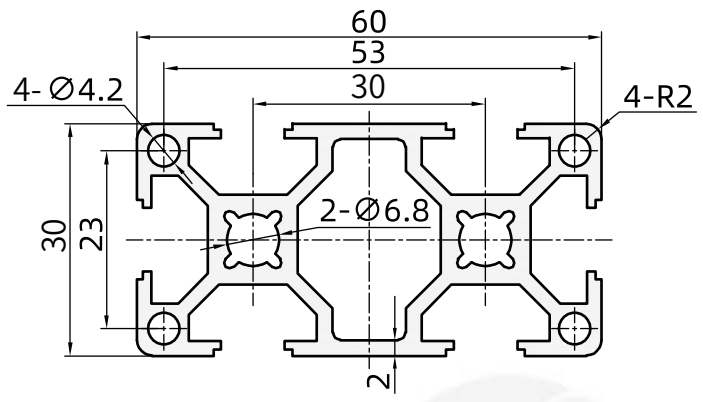

TXCK-H6-3060A

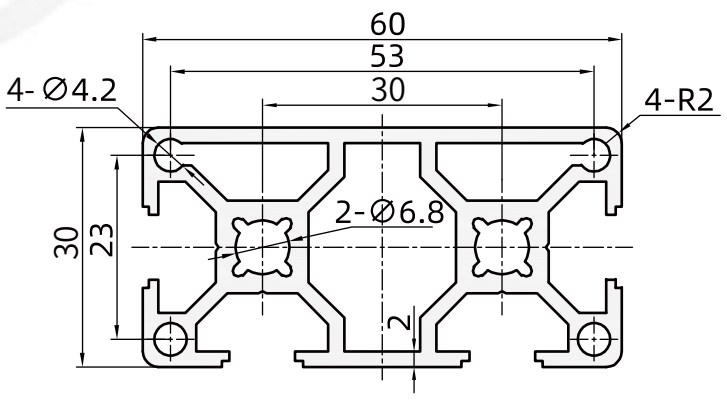

TXCK-H6-3060B

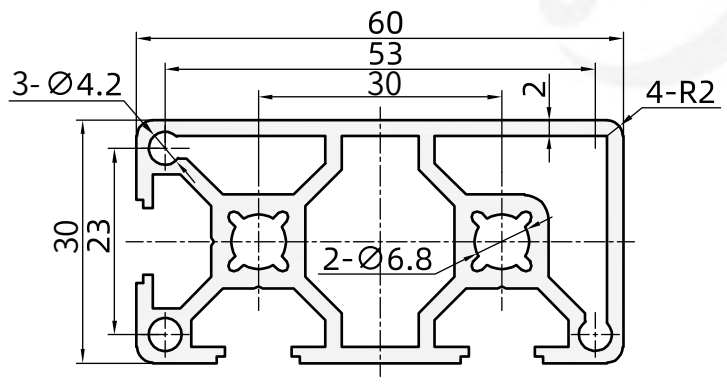

TXCK-H6-6060



TXCK-H6-5050S



TXCK-H6-6630R

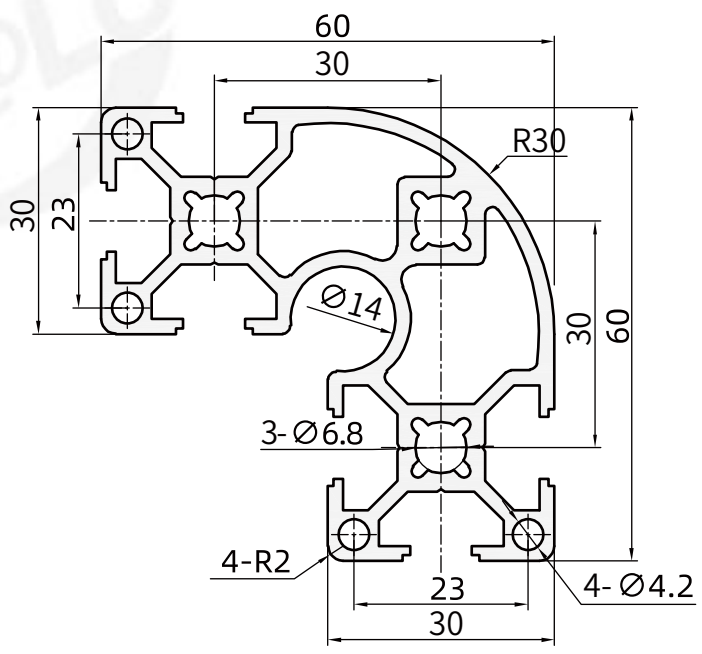

TXCK-H6-6630

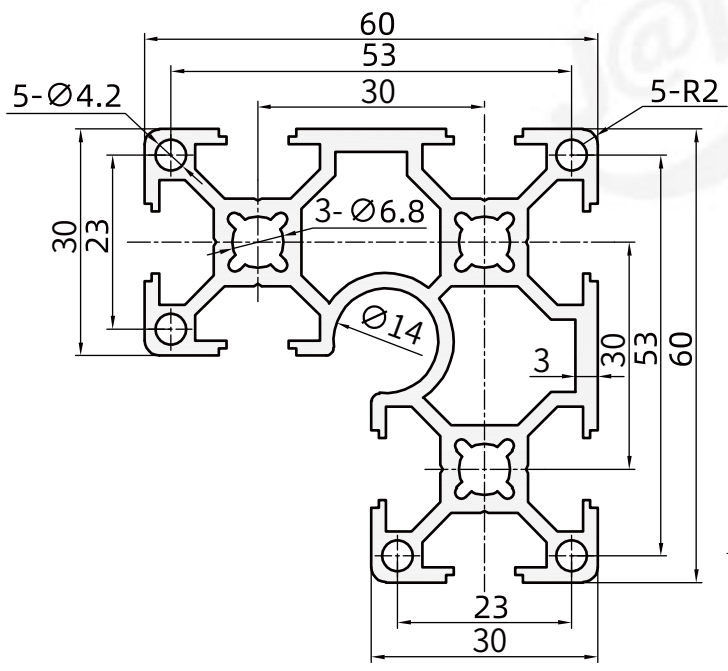



Visual standards:
first perspective

Lightweight | Standard | Heavy Duty

Features: The profile has a moderate wall thickness suitable for general load requirements.

TXCK-H6-3090

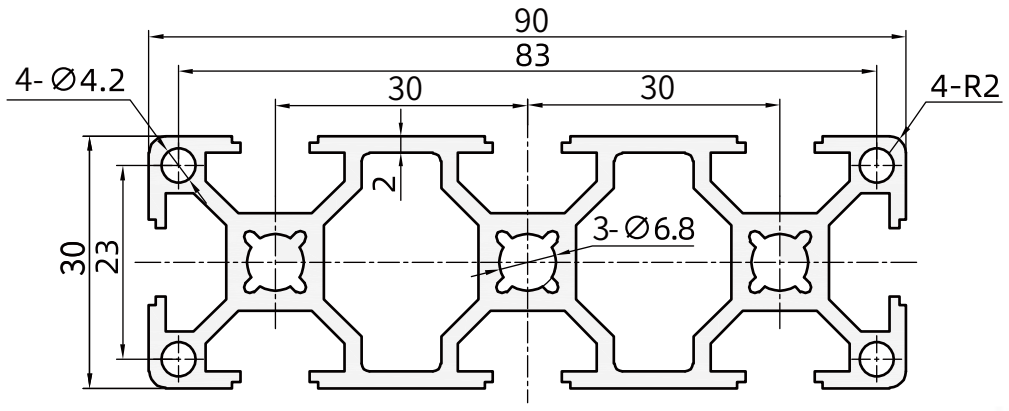

TXCK-H6-30120

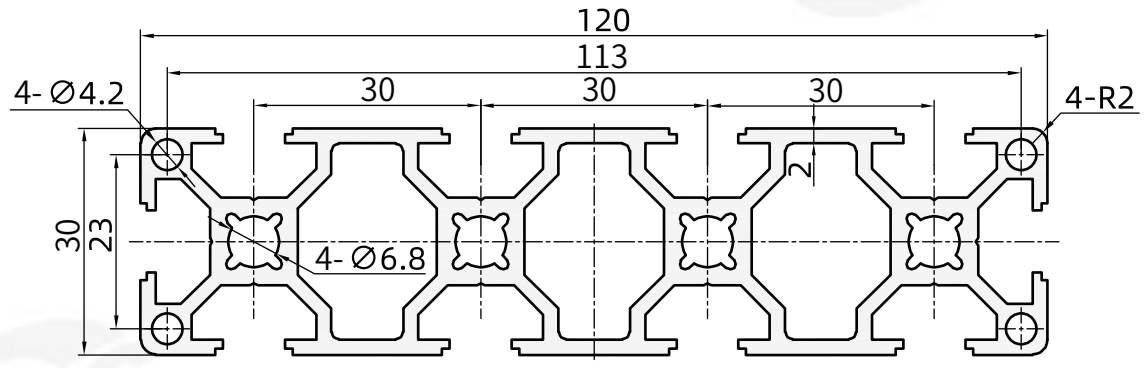

TXCK-H6-30150

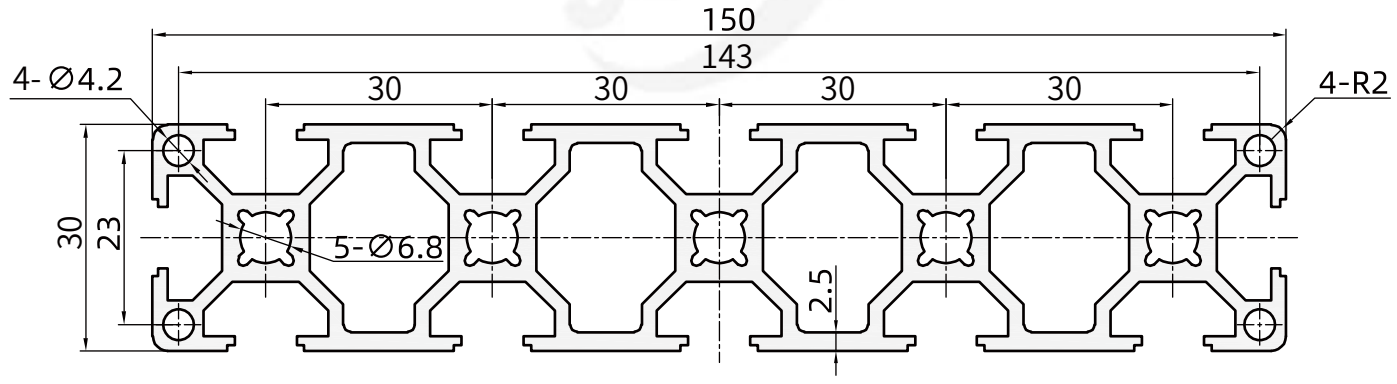



Visual standards: first perspective

Model			Section size	Weight (kg/m)	Cross-sectional area (mm^2)	Cross-sectional moment of inertia		Flexural section modulus	
Code	Specification ❷	L(mm) ❸				Ix(mm^4)	Iy(mm^4)	Wx(mm^3)	Wy(mm^3)
	J3030			0.77	278.71	2.618×10^4	2.618×10^4	1745.33	1745.33
	J3030G			0.68	246.20	2.31×10^4	2.31×10^4	1538.72	1538.65
	J3030A			0.78	283.58	2.801×10^4	2.535×10^4	1820.77	1690.00
	J3030B		30x30	0.83	300.02	2.838×10^4	2.838×10^4	1793.79	1793.79
	J3030H			0.80	288.45	2.984×10^4	2.451×10^4	1989.33	1634.00
	J3030T			0.84	304.89	2.996×10^4	2.763×10^4	1997.18	1752.65
	J3030R			0.73	262.91	2.128×10^4	2.128×10^4	1309.54	1309.54
	J3030RS			0.71	258.59	1.989×10^4	1.989×10^4	1200.12	1200.12
TXCK-H6	J3060			1.37	498.49	4.803×10^4	17.944×10^4	3201.88	5981.21
	J3060G		30x60	1.27	458.95	4.44×10^4	16.89×10^4	2963.33	5630.08
	J3060A			1.44	522.80	5.318×10^4	18.217×10^4	3387.94	6072.32
	J3060B			1.43	519.84	5.220×10^4	18.481×10^4	3355.31	6155.49
	J3090		30x90	1.97	714.68	6.980×10^4	55.694×10^4	4653.64	12376.48
	J6630R			1.91	692.02	21.530×10^4	21.530×10^4	6394.42	6394.42
	J6630RA		60x60	2.00	724.93	23.182×10^4	23.182×10^4	6852.50	6852.50
	J6060			2.07	757	31.728×10^4	31.728×10^4	10576.00	10576.00
	J6060S			2.23	810.81	32.692×10^4	32.692×10^4	10897.23	10897.23
	3030	50~6000	30×30	0.84	308.56	2.74×10^4	2.74×10^4	1827.53	1827.53
TXCK-H7	3030R			0.80	293.64	2.34×10^4	2.34×10^4	1474.11	1474.11
	3060		30×60	1.52	555.89	5.14×10^4	19.37×10^4	3428.80	6456.60
	3030			0.84	308.56	2.74×10^4	2.74×10^4	1827.53	1827.53
	3030A			0.86	315.73	2.96×10^4	2.67×10^4	1918.28	1776.67
	3030B		30×30	0.91	333.73	2.98×10^4	2.98×10^4	1895.81	1895.81
	3030C			0.66	333.73	2.98×10^4	2.98×10^4	1895.81	1895.81
	3030R			0.80	293.64	2.34×10^4	2.34×10^4	1474.11	1474.11
	3060			1.52	555.89	5.14×10^4	19.37×10^4	3428.80	6456.60
	3060A		30×60	1.59	582.83	5.71×10^4	19.75×10^4	3630.76	6583.20
	3060B			1.59	581.43	5.63×10^4	20.2×10^4	3608.75	6706.60
TXCK-H6	3045M		30×45	1.05	382.75	3.77×10^4	7.60×10^4	2458.03	3377.78
	6630			2.25	823.65	25.74×10^4	25.74×10^4	7355.86	7355.86
	6630R		60×60	2.13	779.63	23.66×10^4	23.68×10^4	7001.78	7005.90
	6060			2.42	887.52	34.88×10^4	34.88×10^4	11627.90	11627.90
	3090		30×90	2.19	803.23	7.545×10^4	61.01×10^4	5030.07	13558.53
	30120		30×120	2.86	1046.42	9.95×10^4	138.80×10^4	6631.27	23133.70
	30150		30×150	3.68	1335.89	12.96×10^4	268.17×10^4	8641.53	35755.96
	5050S		50×50	2.13	781.26	18.51×10^4	18.51×10^4	7404.08	7404.08

Optional processing

Code 5	LA	RA	DA
Optional icons	Ø6.8 through hole changed to screw hole M8 depth 20 	Ø6.8 through hole changed to screw hole M8 depth 20 	Ø6.8 through hole changed to screw hole 6M8 depth 20 
Selection method	LA (left) ● Designation example: TXCK-H6-3030-L100-LA	RA (right side) ● Designation example: TXCK-H6-3030-L100-RA	DA (both sides) ● Designation example: TXCK-H6-3030-L100-DA

	45° cutting							
Processing position	Upward		Downward		Forward		Towards the back	
	Left	Right	Left	Right	Left	Right	Left	Right
Code	LU	RU	LD	RD	LF	RF	LB	RB

Processing position legend

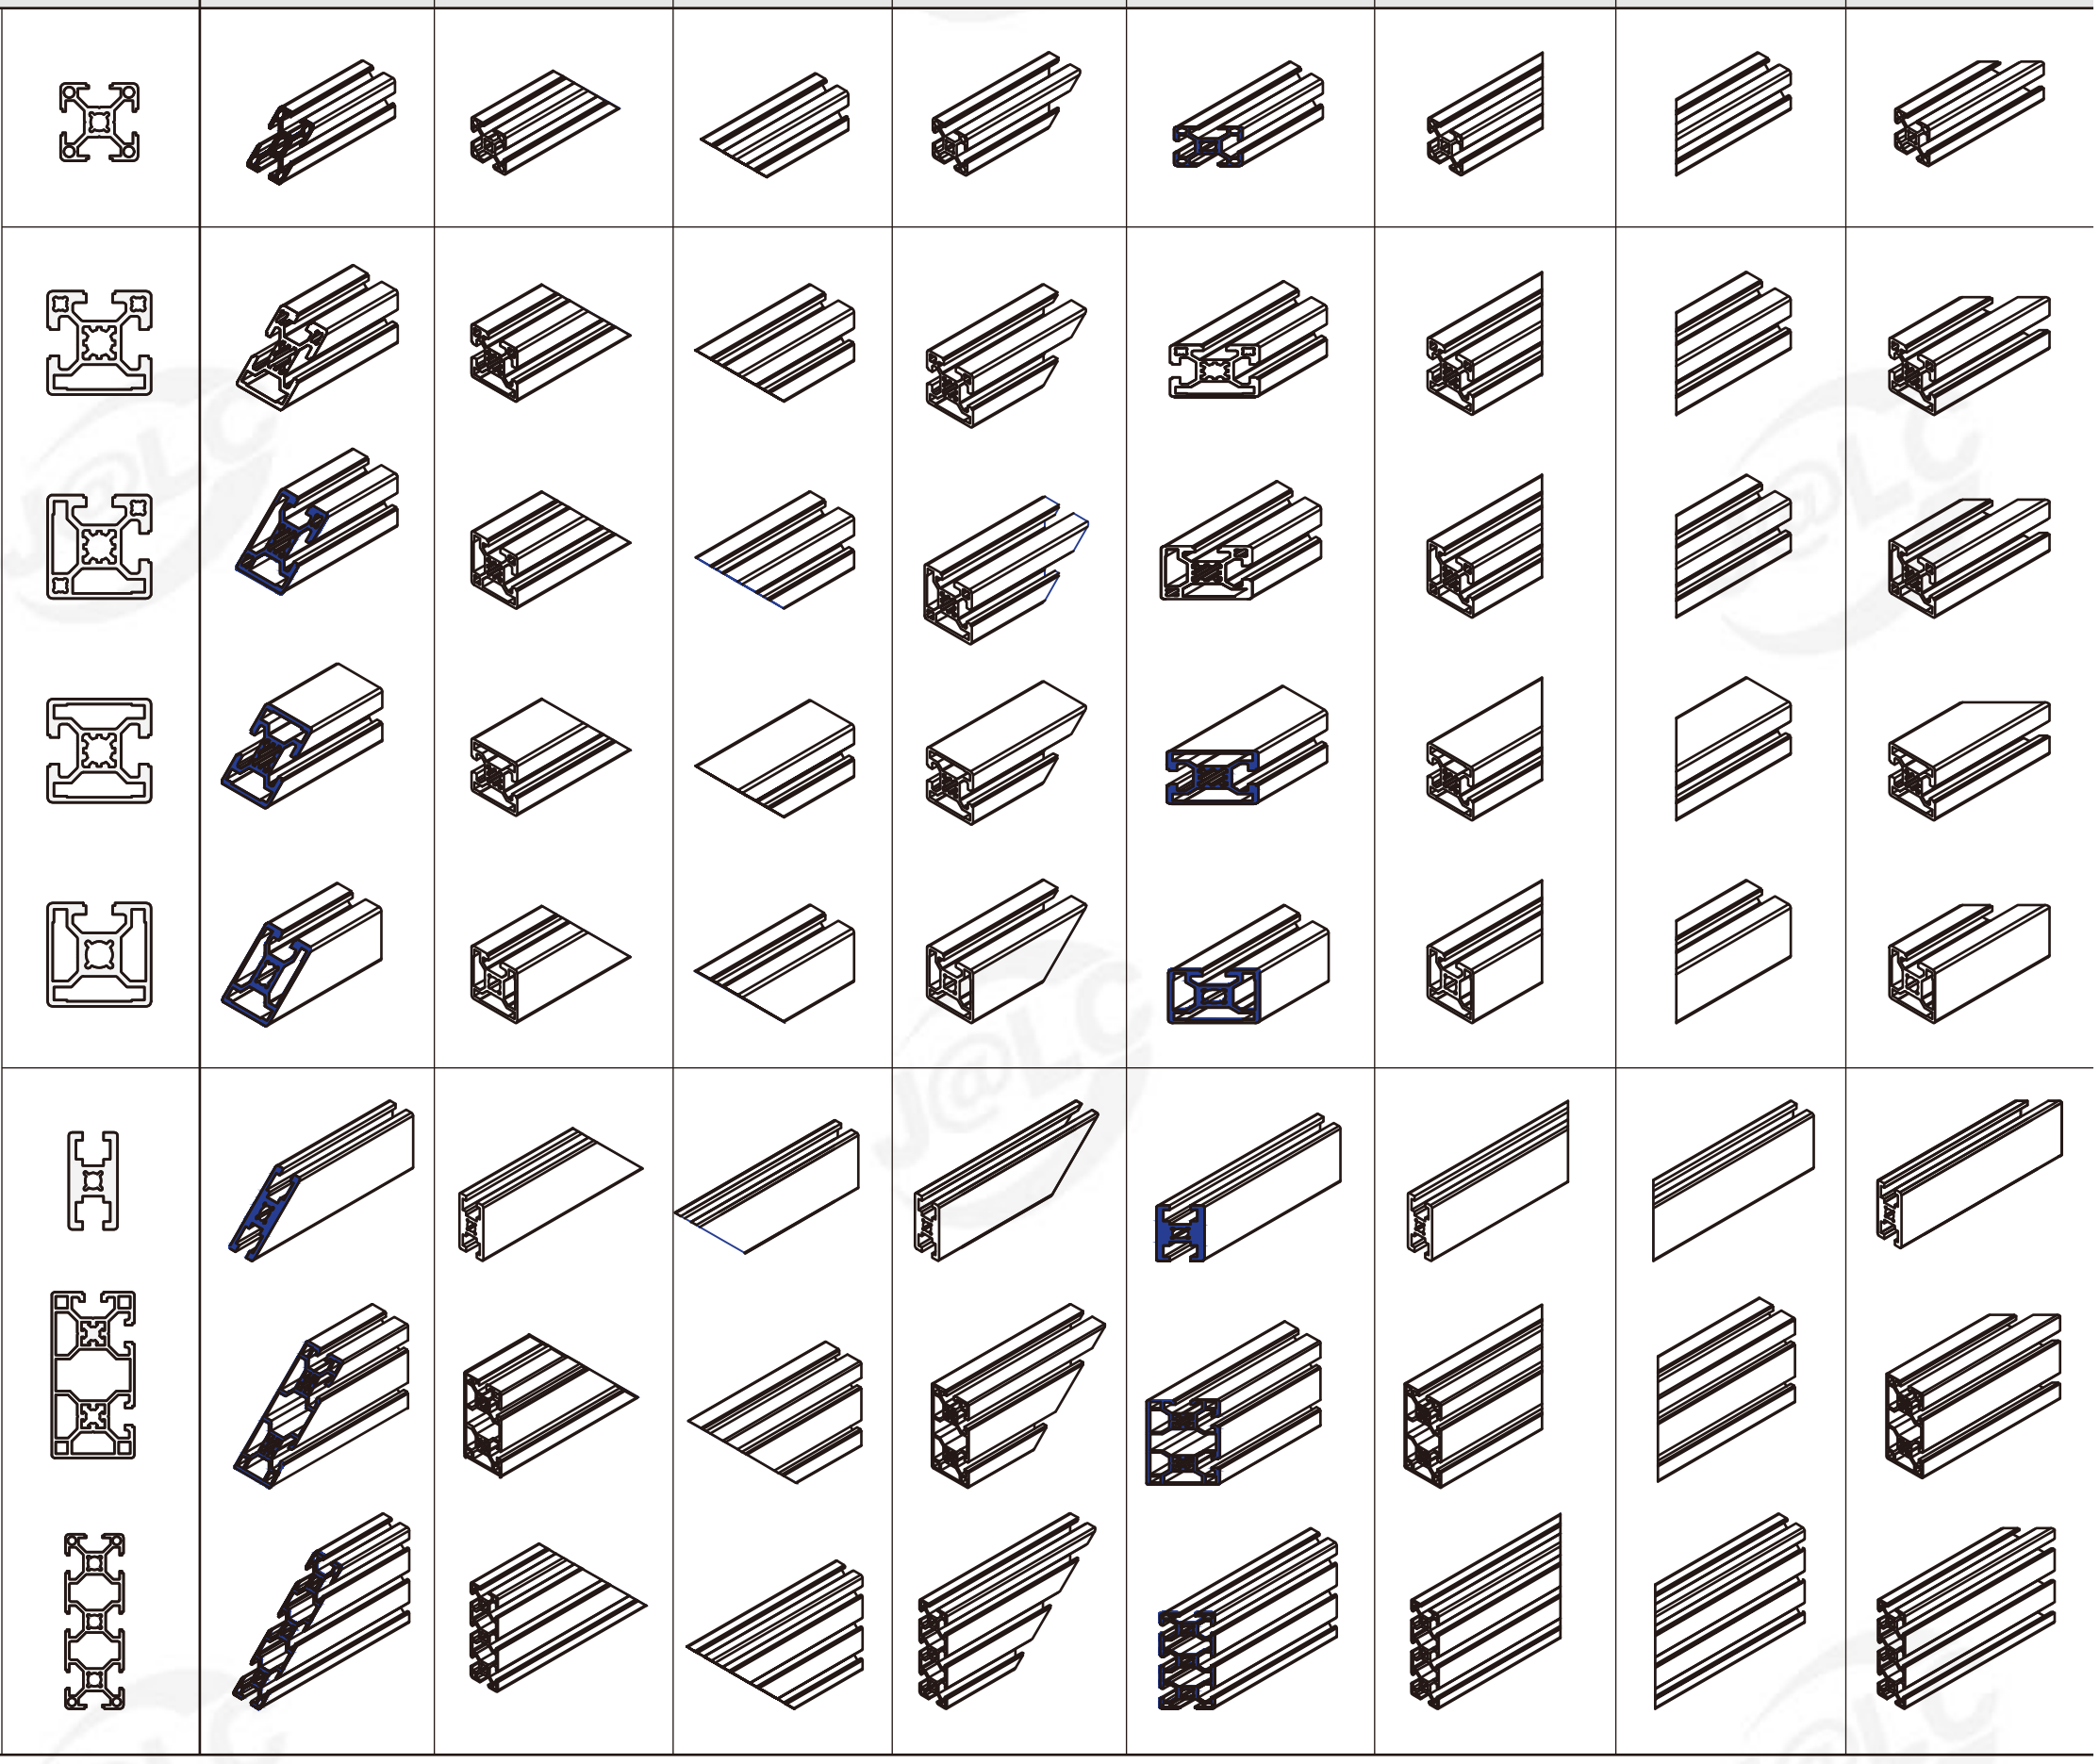

The ordering example is as follows: (see the right picture for cutting position)

TXCK-H6-8 - 3030 - L800 - LU

- LU: 45° cutting, cutting surface facing up, left end
- L800: Profile length
- 3030: Profile specifications
- TXCK-H6-8: Profile code

Cut side up

LU



Usage Examples



- Multiple optional processing can be selected at the same time, selection example:

Example 1: TXCK-H6-8-3030-L800-LU-RU (see Figure 1)   Example 2: TXCK-H6-8-3030-L800-LU-RDH-Z5-A350-B250 (see Figure 2)



Figure 1

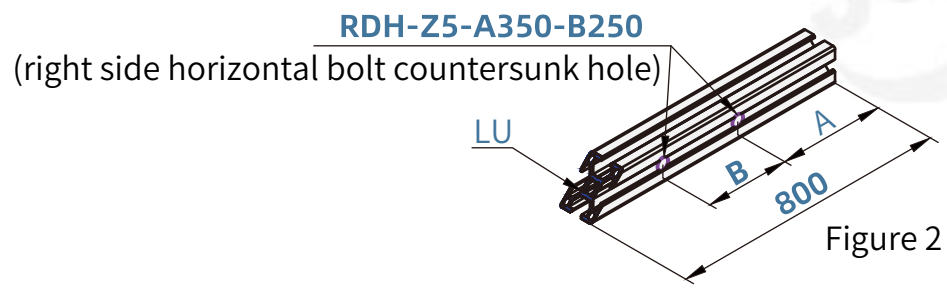

Figure 2

- For the placement reference and opening direction of special profiles, see the reference example diagram (the specific placement method of the profile is the reference for the profile processing direction):
  ① For square profiles, place the edge facing downwards; if there is more than one edge, the other edge should face left.
  ② Place it with the arc facing upward and right.
  ③ For rectangular profiles, place them vertically; if there is an edge seal, place it with the edge seal facing left.
  ④Place the L-shaped notch toward the upper right.
- If the profile has edge banding, it does not support double-sided internal blind holes.

Built-in blind holes for connector mounting								
Processing position	Left horizontal blind hole	Right horizontal blind hole	Left horizontal double blind hole	Right horizontal double blind hole	Left vertical blind hole	Right vertical blind hole	Left vertical double blind hole	Right vertical double blind hole
Code	LH	RH	LDH	RDH	LG	RG	LDG	RDG

Processing position legend

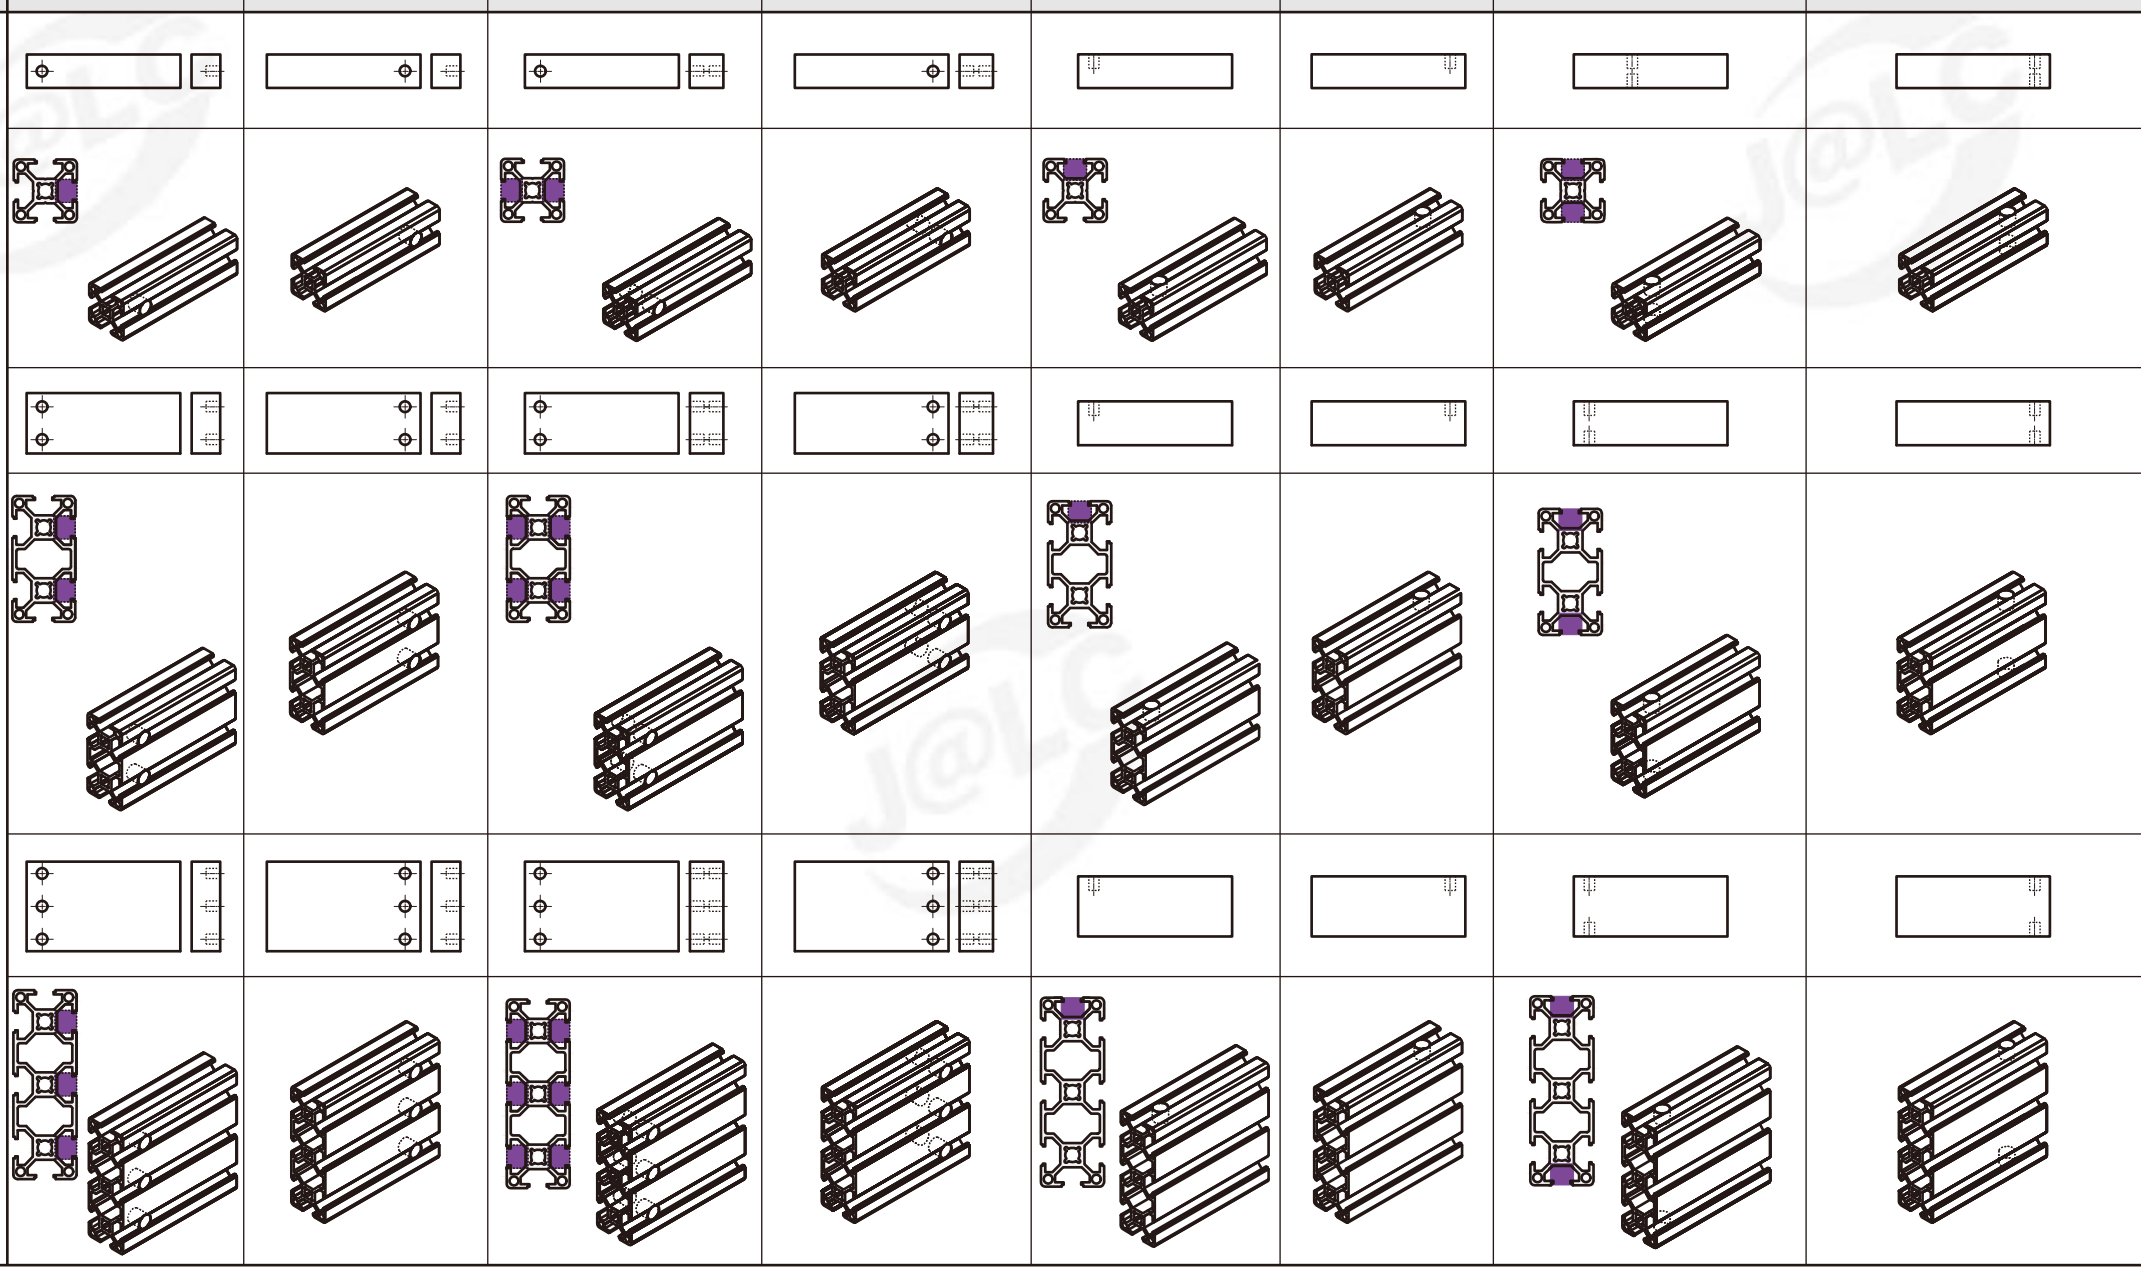

- The ordering example is as follows: (See the right picture for the specific processing location)

TXCK-H6-8 - 3030 - L800 - LH
- LH: Built-in connector installation blind hole Left horizontal blind hole
- L800: Profile length
- 3030: Profile specifications
- TXCK-H6-8: Profile code



- The grooves on the default processing surface are all processed. If the customer has other requirements, please attach a note when placing an order.

Different processing surfaces of profiles, corresponding processing dimensions

Profile Model	G	H	D	Equipped with bolts	Profile processing dimensions
Side Length 20	13	∅12.5	9	EDLA-S1-M4-L16	
Side Length 30	16	∅15	12.5	EDLA-S1-M6-L20	
Side Length40	19	∅19	18	EDLA-S1-M8-L25	
Side Length 45/50/60	19	∅19	18	EDLA-S1-M8-L25	

Usage Examples



Multiple optional processes can be selected at the same time. Selection example:

TXCK-H6-8-3030-L800-LH-RG (see Figure 1)
TXCK-H6-8-3030-L800-LH-RA (see Figure 2)
TXCK-H6-8-3030-L800-LH-RU (see Figure 3)
TXCK-H6-8-3030-L800-LH-LF-A220-B200 (see Figure 4)



Figure 1



Figure 2



Figure 2



Figure 4

For the placement reference and opening direction of special profiles, see the reference example diagram (the specific placement method of the profile is the reference for the profile processing direction):

① For square profiles, place the edge facing downwards; if there is more than one edge, the other edge should face left.
② Place it with the arc facing upward and right.
③ For rectangular profiles, place them vertically; if there is an edge seal, place it with the edge seal facing left.
④Place the L-shaped notch toward the upper right.

If the profile has edge banding, it does not support double-sided internal blind holes.

End face thread hole processing			
Processing position	Left end	Right end	Both ends
Code	LA	RA	DA
Processing position legend			
			
			
			
			
			

Euro Standard 30 Series

- The following figure shows the benchmark for placing special profiles and examples of hole processing (the specific placement method of the profile is the benchmark for the profile processing direction):
- Generally, the inner hole is processed as threaded hole by default; if other hole processing is required, please add a note to the attached figure.

①For square profiles, place the edge facing downwards; if there is more than one edge, the other edge should face left (as shown below):



② Place the arc side facing the upper right (as shown below):



③ For rectangular profiles, place them vertically; if there is an edge banding, place it with the edge banding facing left (as shown below):

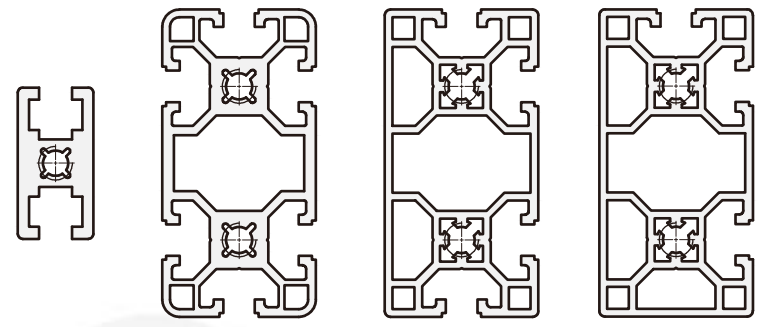

④The L-shaped notch is placed toward the upper right (as shown below):



Order example: (processing location as shown in Figure 1)

TXCK-H6-8 - 3030 - L800 - LA

- LA: Left end thread hole
- L800: Profile length
- 3030: Profile specifications
- TXCK-H6-8: Profile code



Figure 1



Figure 2

Right end 45° cut, cut side facing up



Figure 3

Optional processing and use

Multiple optional processing can be selected at the same time, the selection examples are as follows:

TXCK-H6-8-3030-L800-DA (as shown in Figure 2)

TXCK-H6-8-3030-L800-LA-RU (Figure 3)

Note:

1. When machining end face threaded holes, please specify the machining direction.
2. The number of end threaded holes varies depending on the type of profile (the number of end threaded holes).
3. The standard threaded hole depth on the end face is shown in the table below (special depth requirements require notes):

Thread size	Standard thread depth	Thread size	Standard thread depth
M3	8mm	M8	20mm
M4	10mm	M10	24mm
M5	12mm	M12	28mm
M6	15mm	M14	36mm

Usage Examples



Bolt countersunk hole				
Processing position	Left horizontal countersunk hole	Right horizontal countersunk hole	Left vertical countersunk hole	Right vertical countersunk hole
Code	LC	RC	LE	RE
Processing position legend	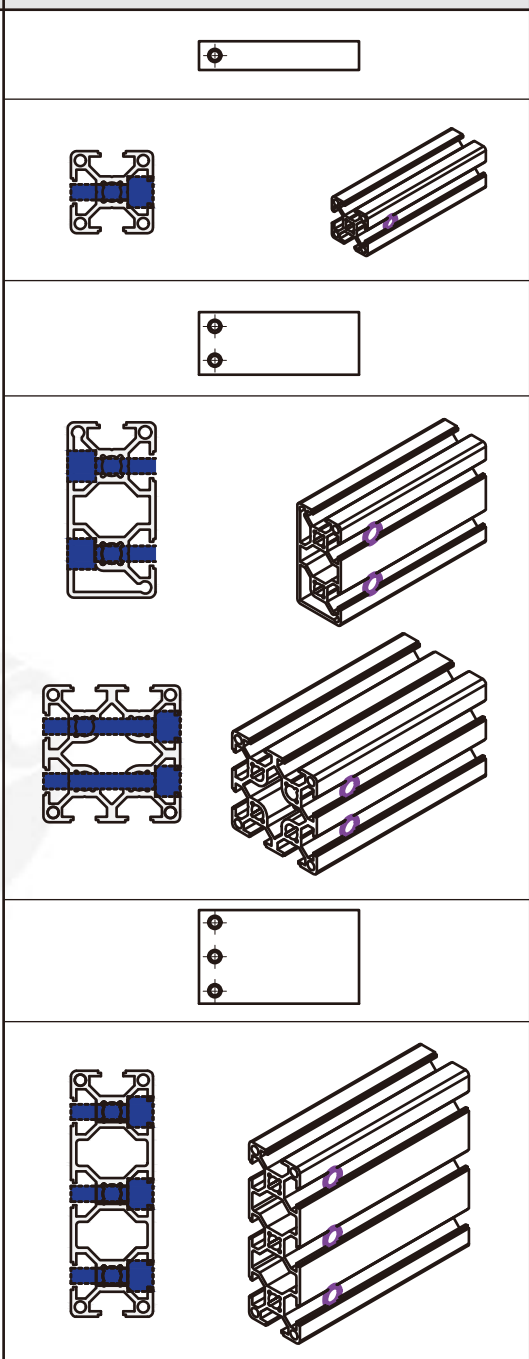	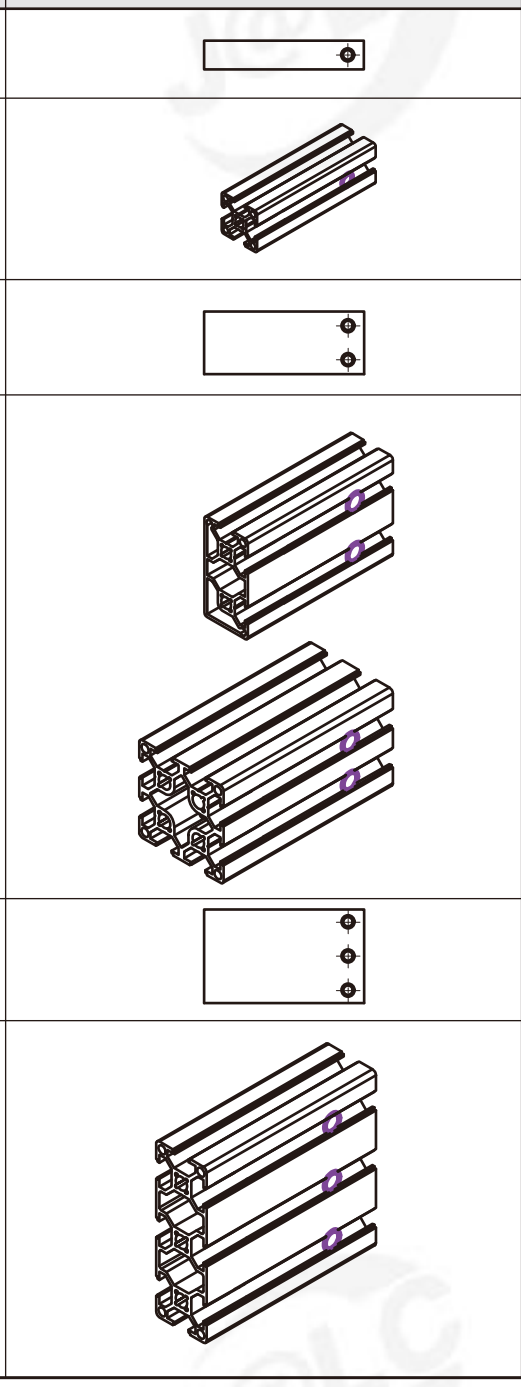	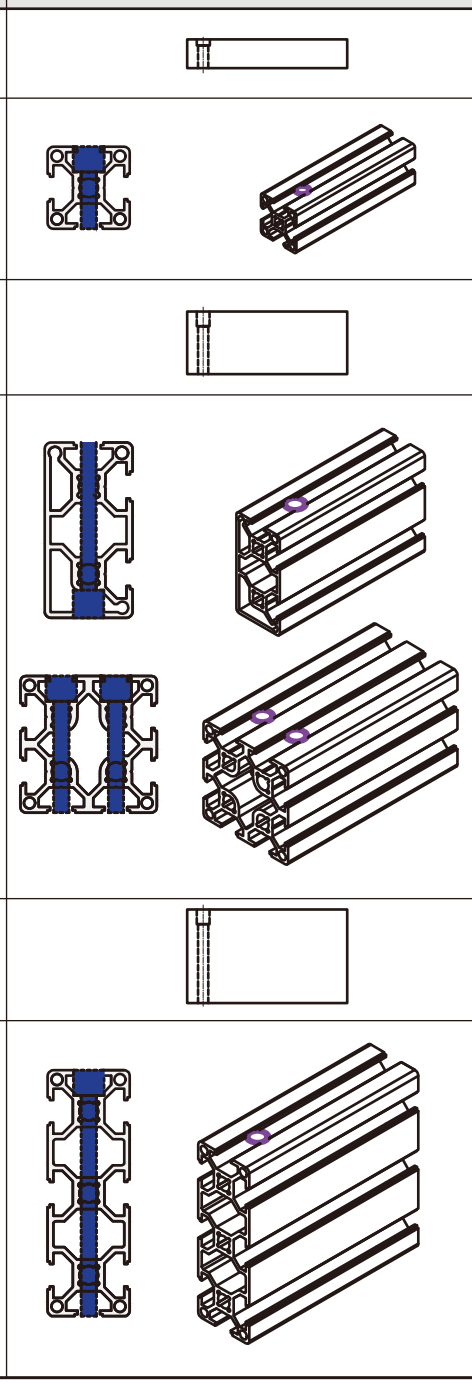	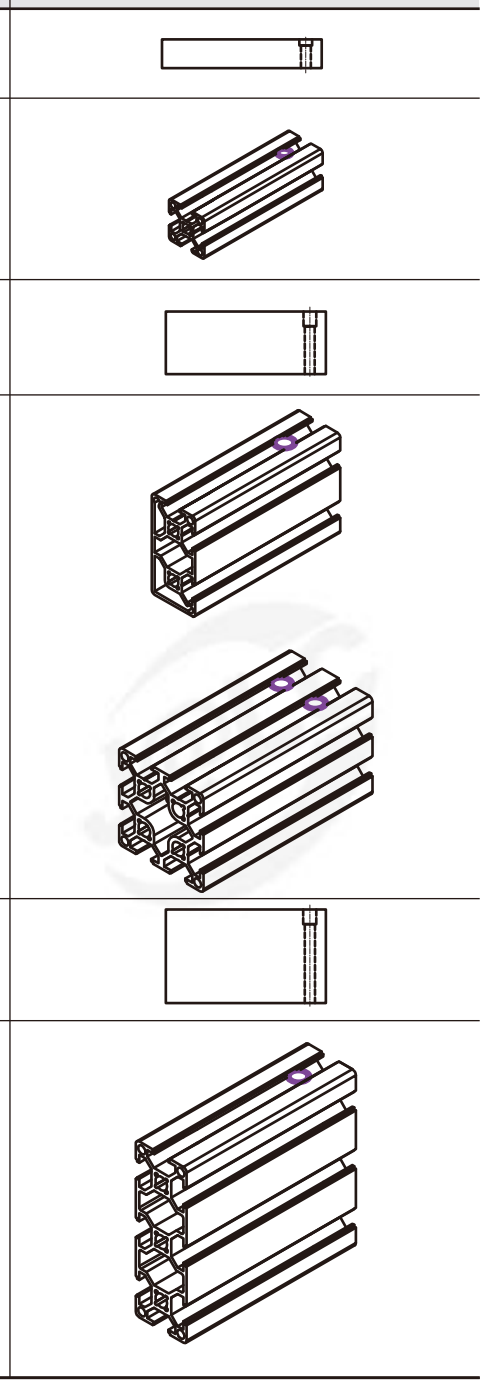

- The ordering example is as follows: (see the picture on the right)
  When machining a countersunk hole:
  TXCK-H6-8 - 3030 - L200-LE- Z5 - A30
  - A30: The distance from the left end face to the center of the first countersunk hole is 30
  - Z5: Countersunk hole size
  - LE: Bolt countersunk hole, left vertical countersunk
  - L200: Profile length
  - 3030: Profile specifications
  - TXCK-H6-8: Profile code
- By default, all grooves on the machined surface are machined. If the customer has other requirements, please attach a note when placing an order.
- The distance between any countersunk hole and the end face is: 0~6000.



- The ordering example is as follows: (see the picture on the right)

Profile Type	Countersunk hole size(Z)	d	d1	H
Slot width 6.2/6.3	5	5.5	9.5	5.5
	6	6.5	11	6.5
Slot width 8.2/8.3	8	9	14	8.5
Slot width 10.2	8(Used with threaded sleeve)	9	14	8.5
	12	13	20	12.5





- The minimum unit is 0.5mm; the distance between the first hole close to the end face and the end face cannot be less than 7mm (ie: A27mm).
- A maximum of 5 countersunk holes can be opened in one direction. (If there are more than 5, the codes will be continued in sequence and the pictures must be attached for offline quotation)
- When the groove width 10.2 type is used with M8 and tapping on the end face of the profile, it is used in conjunction with a threaded sleeve.

- Multiple optional processes can be selected at the same time. Selection example:
  TXCK-H6-8-3030-L800-LE-Z5-A200-LC-Z5-A80-B220-C220 (see Figure 1)
  TXCK-H6-8-3030-L800-LE-Z5-A300-B80-LC-Z5-A200-B200 (see Figure 2)
  TXCK-H6-8-3030-L800-LE-Z5-A300-B80-C220-LC-Z5-A200 (see Figure 3)



Figure 1



Figure 2



Figure 3

- For the placement reference and opening direction of special profiles, see the reference example diagram on P517 (the specific placement method of the profile is the reference for the profile processing direction):
  ① For square profiles, place the edge facing downwards; if there is more than one edge, the other edge should face left.
  ② Place it with the arc facing upward and right.
  ③ For rectangular profiles, place them vertically; if there is edge sealing, place them with the edge sealing facing left.
  ④Place the L-shaped notch toward the upper right.
- If the profile has edge banding, it is preferred to drill bolt countersunk holes from the edge banding.

- Usage Examples



Wrench hole				
Processing position	Left horizontal through hole	Right horizontal through hole	Left vertical through hole	Right vertical through hole
Code	LK	RK	LM	RM
Processing position legend	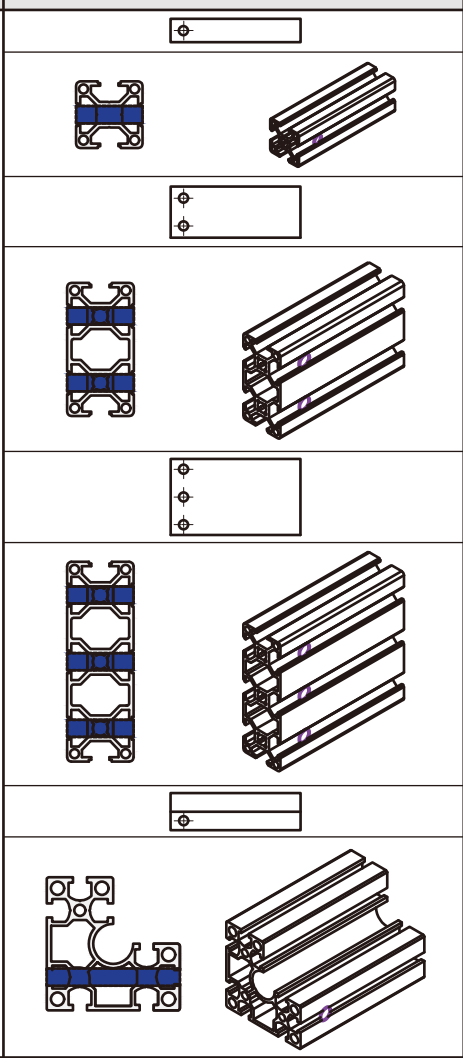	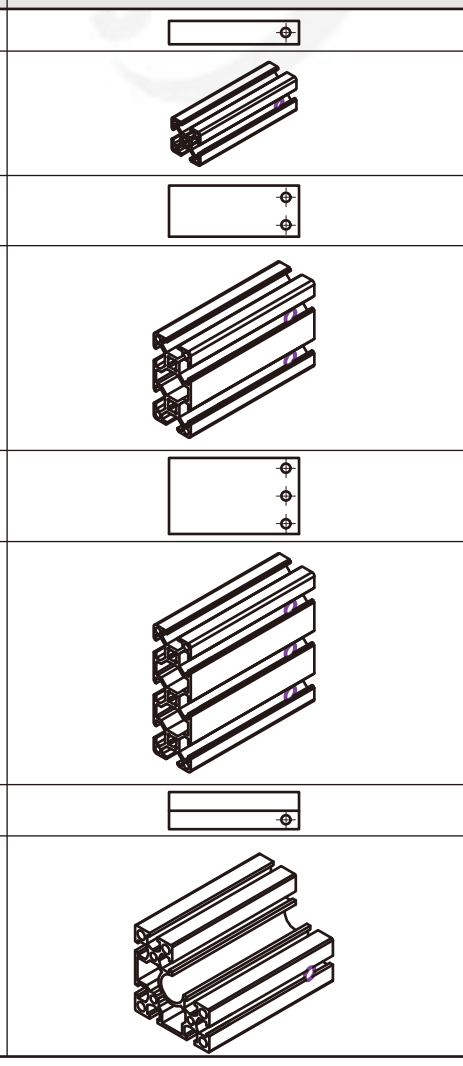	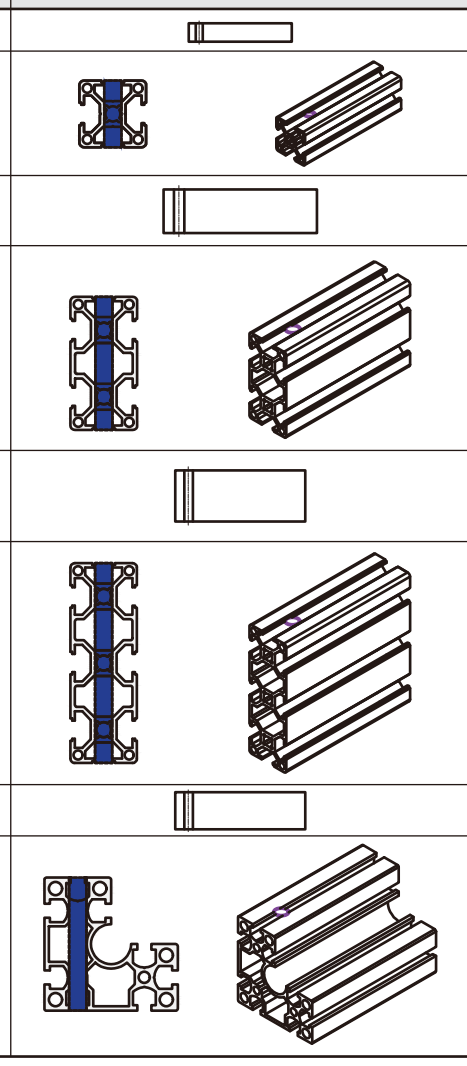	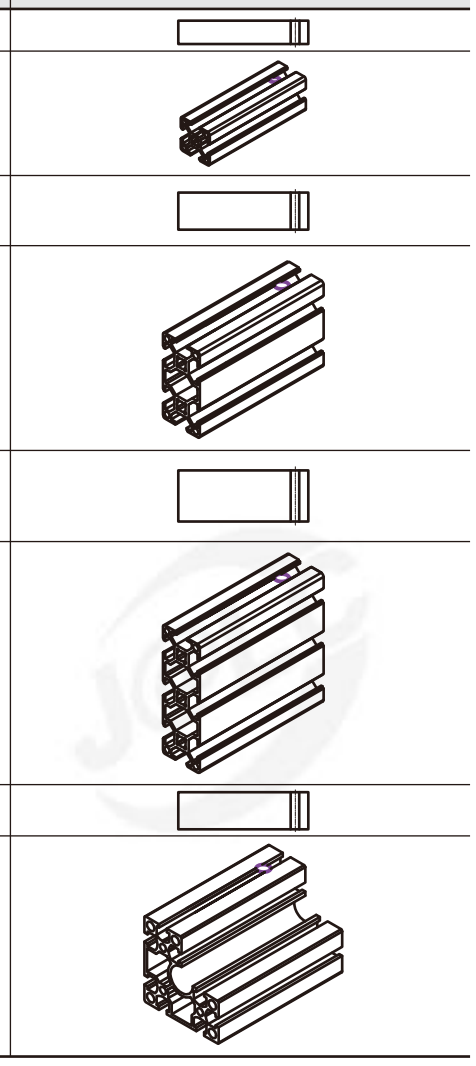

Euro Standard 30 Series

The ordering example is as follows: (see the picture on the right)
When machining an additional wrench hole:

TXCK-H6-8 - 3030 - L800 - LM - A30
- The dimension from the left end face to the center of the first wrench hole is 30
- Wrench hole, left vertical through hole
- Profile length
- Profile specifications
- Profile code



- The grooves on the default processing surface are all processed. If the customer has other requirements, please attach a note when placing an order.
- The spanner hole can be opened at any position, and the distance between any spanner hole and the end face is: 0~6000mm.
- A maximum of 5 wrench holes can be opened in one direction. (If there are more than 5, the codes will be continued in sequence and the pictures must be attached for offline quotation)

Wrench hole parameter table

Profile SPEC	d (wrench hole size)		
	General	Intl.	EN
15 series	5	—	—
20 series		—	6.5
30 series	—	6.5	8.5
40 series		8.5	8.5
45 series		—	12.5

Common wrench hole applications, installation examples are as follows:

TXCK-H6-8-3090-L800-LM-A15-B30-C30 (see the figure below)



Fixed wrench hole position

TXCK-H6-8-3090-L800-LM-A15-B100-C100 (see the figure below)



Specify wrench hole location

Multiple optional processes can be selected at the same time. Selection example:

TXCK-H6-8-3030-L800-LM-A50-B300-LK-A200-B400 (see the figure below)

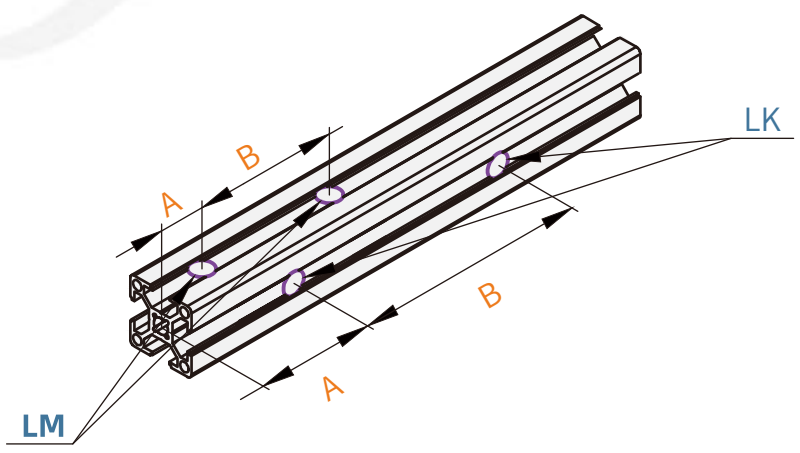

TXCK-H6-8-3030-L800-LM-A50-B600-RU (see the figure below)

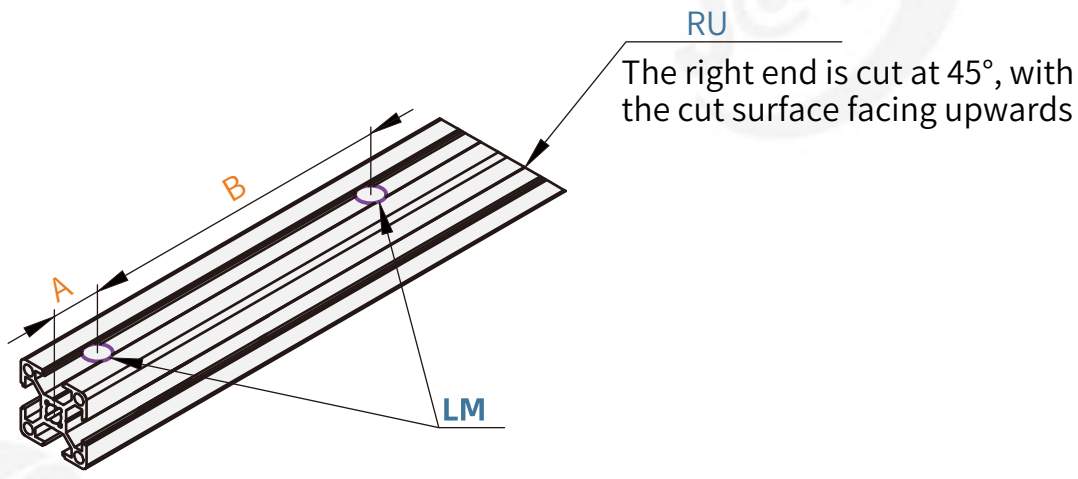

For the placement reference and opening direction of special profiles, see the reference example diagram (the specific placement method of the profile is the reference for the profile processing direction):
① For square profiles, place the edge facing downwards; if there is more than one edge, the other edge should face left.
② Place it with the arc facing upward and right.
③ For rectangular profiles, place them vertically; if there is an edge seal, place it with the edge seal facing left.
④Place the L-shaped notch toward the upper right.