2027 · BOSSY.COM.TR

CONTENTS

6 section

125 page

01 OPENING SYSTEMS 03

Tilt & turn set · overview 05
System sets 1–13 06
Tilt & turn sets 80–170 kg 09
Turn-only sets 22
Safety lock set 36
Auxiliary accessories 37

02 FACADE SYSTEMS 40

Small friction stays 41
Large friction stays 42
Stepped restrictor 43
Restrictor stay 44
Facade locking set 45
System hardware equipment 48
Parallel stay 50

03 HINGES 62

Fortis door hinge 63
Tenax door hinge 64
Validus adjustable window hinge 65
Fortis window hinge 67

04 HANDLES 70

Articulated handle 71
Novus straight handle 73
Straight and curved handles 75
Novus curved handle 79
Door handle 81
Bezault handle 82

05 LIFT & SLIDE SYSTEMS 84

System data 85
Schemes · quick selection · connecting bar 86
Carriage sets · 30 · 42 · 16/18/22 90
Installation sets · 42 and 16 mm 92
Espagnolette and lock 97
Pin espagnolette and lock 98
Installation details 100
System equipment 99
Sliding and lift & slide handles 102
Machining · maintenance · order list 106

06 DOOR LOCKS 110

System overview · selection table 111
Twin-pin hook lock 113
Hook main lock 114
Single-point lock set 115
Rod-driven single-point lock 116
Hook-pin 3-point lock 117
Twin-pin 3-point lock 118
Hook 3-point lock 120
Keepers · ordering information 121

SYMBOLS IN THIS CATALOG

Max. sash weight
kg

Sash width (W)
mm

Sash height (H)
mm

Material
304 stainless, aluminium

Endurance test
opening-closing cycles

Optional part
not included in the set

Box quantity
parts per box

All dimensions are in mm. W: sash width, H: sash height (sash outer dimensions).

Numbered circles indicate the part numbers in the assembly diagram.

BOSSY®
WINDOW AND DOOR HARDWARE SOLUTIONS

MEET BOSSY

WE BUILD SOLUTIONS FOR YOUR NEEDS.

WINDOW AND DOOR HARDWARE SOLUTIONS

SINCE 2003 · ISTANBUL

WHO WE ARE

Since 2003 we have been supplying innovative, technological products to the construction sector and the facade accessories market. As Birikim Kalıp Yapı Ürünleri, we manufacture for hundreds of customers in Türkiye and in many countries around the world.

WHAT WE MAKE

Facade friction stays, parallel stays, window and door handles, tilt & turn systems, hinges and lift & slide sets. We are a domestic manufacturer of the stays used on aluminium window profiles.

HOW WE WORK

With our expert engineering team and our own tool shop, we design, mass-produce and test our products. Our R&D investment continues at full pace.

2003	25,000	304	100%
founded	m² production area	stainless steel	customer satisfaction target

OUR VISION

To become a world brand that promises the highest level of trust and quality through sustainable growth.

OUR MISSION

To deliver innovative, technological products in Türkiye and worldwide with a focus on 100% customer satisfaction, and to rank among the leading brands in the sector.

01 OPENING SYSTEMS

TILT & TURN AND TURN-ONLY SETS

TILT & TURN · TILT

Tilt & turn and turn-only sets for aluminium profiles with Euro groove. With tilt & turn, the sash tilts inward or opens fully inward; with turn-only, it simply turns on its side hinges.

80-170 kg	2 types	14 parts
capacity	opening	set components

CONTENTS

Tilt & turn system 04
Tilt & turn sets 80–170 kg 05
Tilt & turn system sets 06
Turn-only sets 22
Turn-only system sets 23
Turn-only assembly diagrams 26
Turn-only technical data 31
Safety lock set 36
Auxiliary accessories 37

TILT & TURN SYSTEM

TURN + TILT WITH ONE HANDLE

BOSSY HANDLE
Straight spindle · p. 06

ANTHRACITE PROFILE · TILT POSITION

DURABILITY GUARANTEE

20,000

opening-closing cycles

The hinge, stay and handle mechanism is guaranteed for up to 20,000 opening-closing cycles.

80-170 kg SASH WEIGHT	**400-1300** mm SASH WIDTH
550-2400 mm SASH HEIGHT	**5** sets WEIGHT CLASS

HANDLE POSITIONS

FROM INSIDE



Closed	Turn	Tilt
handle down	handle horizontal 90°	handle up 180°

FEATURES

SET SELECTION P. 06

Two movements, one handle
Depending on the handle position, the sash opens inward on its side or tilts from the top.

Euro groove compatible
Fits directly onto aluminium profiles with Euro groove.

Concealed stainless stay
The tilt stay sits between sash and frame; stainless steel body.

Stainless pin
Hinge pin in 304 stainless steel; corrosion-resistant outdoors.

Left and right sash
Available as DIN-L and DIN-R; sash handing is specified when ordering.

Optional parts
Additional stay, additional locking and sash lifter for large sashes.

The guarantee applies when installed and used in accordance with the installation instructions.

304 | CE | ift | TSE

OVERVIEW AND SET SELECTION

TILT & TURN SET

Set	Standard sash W 400–1300 · H 550–2000	Tall sash W 400–1300 · H 2000–2400	Support screw part 11
80 kg p. 09	●	●	—
100 kg p. 11	●	●	●
130 kg p. 13	●	●	●
150 kg p. 15	●	●	●
170 kg p. 17	●	●	●

APPLICATION RANGE

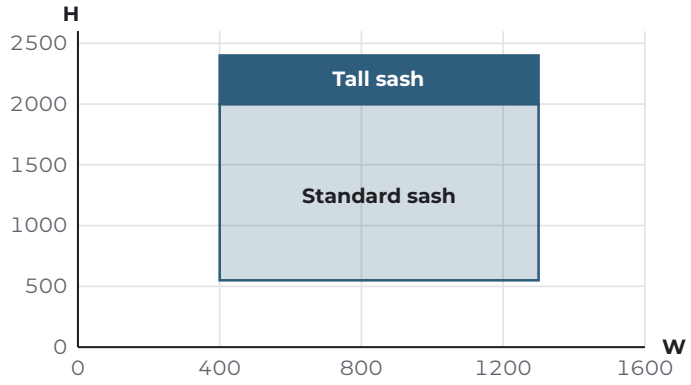

W, H: sash outer dimensions, mm · do not exceed set weight

OPENING TYPE

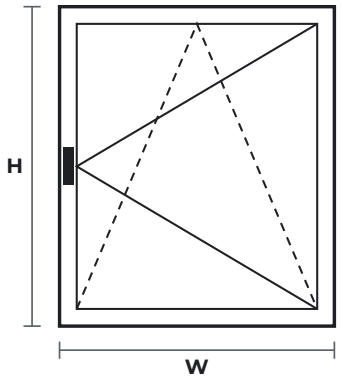

Solid: turn · Dashed: tilt

SASH WEIGHT CALCULATION

Glass weight (kg) =
glass area (m²) × total glass thickness (mm) × 2.5

Sash weight ≈ glass weight + sash profile and accessory weight

EXAMPLE

1000 × 1500 mm sash, 4 + 16 + 4 insulating glass (8 mm glass in total)

1.5 m² × 8 mm × 2.5 = **30 kg** glass

Sash weight = 30 kg + profile and accessory weight

SET SELECTION

1. Check sash W and H against the application range.
2. Calculate the sash weight.
3. Choose the smallest set that carries the weight; the parts list is on the relevant page.

TILT & TURN SET · STANDARD SET

SYSTEM SETS 1-5

Numbers match the assembly diagram and parts lists. There are two hinge set types: A and B.

1 **Hinge set A**
80 · 100 kg · top and bottom hinge
10 pcs / box

1 **Hinge set B**
130 · 150 · 170 kg · top and bottom hinge
10 pcs / box

2 **Stay set**
size 1 · size 2
10 pcs / box

3 **Handle**
straight spindle
10 pcs / box

4 **Handle drive set 1**
10 pcs / box

4.1 ALTERNATIVE
Handle drive set 2
20 pcs / box

5 **Locking set 1**
corner drive with tab
10 pcs / box

5 **Locking set 2**
corner drive with latch
10 pcs / box

TILT & TURN SET · SETS

SYSTEM SETS 5-6

Sets made up of several parts. A dashed circle marks an optional set; optional hardware is on the next page.

5 **Horizontal tilt locking set 1**
150 · 170 kg · corner drive with tab

10 PCS / BOX

5 **Horizontal tilt locking set 2**
150 · 170 kg · corner drive with latch

10 PCS / BOX

6 **Rear locking set**

10 PCS / BOX

TILT & TURN SET · OPTIONS AND ADD-ON PARTS

OPTIONAL HARDWARE 8-14

Dashed circle: option, ordered separately. Solid circle: included in the set. Numbers match the assembly diagram and technical data tables.

8 ADDITIONAL STAY

10 PCS / BOX

Application range	1200 < W < 1300 mm
Sets	80 · 100 · 130 · 150 · 170 kg

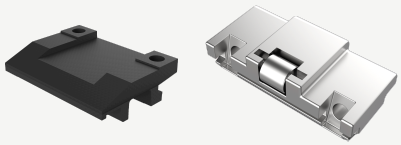

9 ROLLER SASH LIFTER

10 PCS / BOX

Application range	1200 < W < 1300 mm
Sets	80 · 100 · 130 · 150 · 170 kg



10 ADDITIONAL LOCKING PIN

20 PCS / BOX

Application range	1200 < W < 1300 mm
Sets	80 · 100 · 130 · 150 · 170 kg

11 TOP HINGE SUPPORT SCREW

20 PCS / BOX

Application range	All sash sizes
Sets	100 · 130 · 150 · 170 kg



13 LOAD TRANSFER PIECE

20 PCS / BOX

Application range	All sash sizes
Sets	150 · 170 kg

14 OPENING RESTRICTOR

10 PCS / BOX

Size 1 400-1000 mm
Size 2 1001-1300 mm

Sets	80 · 100 · 130 · 150 · 170 kg

TILT & TURN SET · ASSEMBLY DIAGRAM

80 KG STANDARD SET

W 400–1300 · H 550–2400 mm

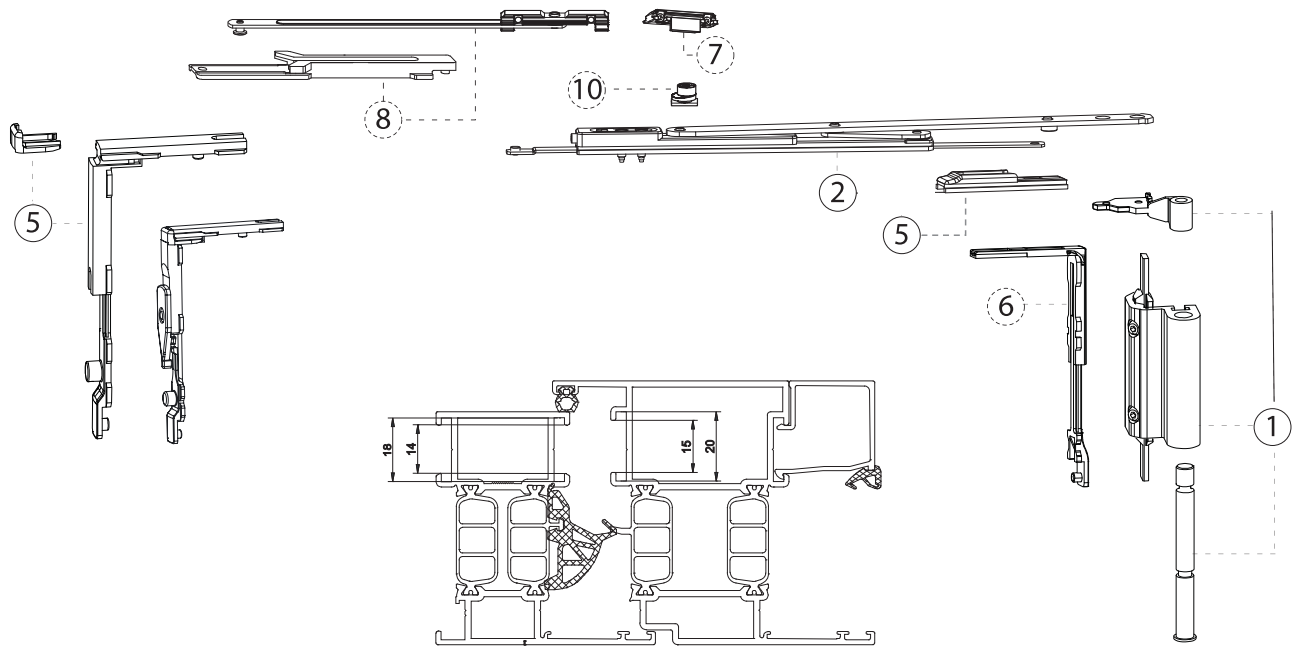

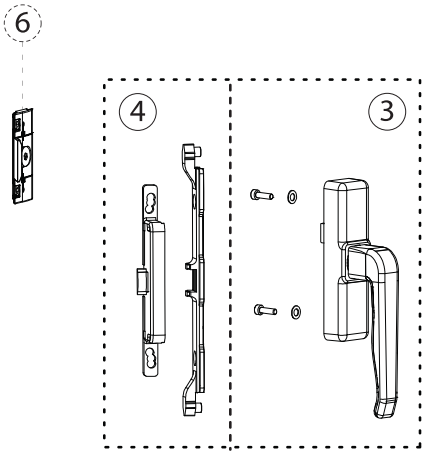

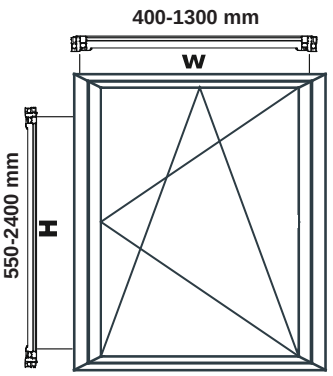



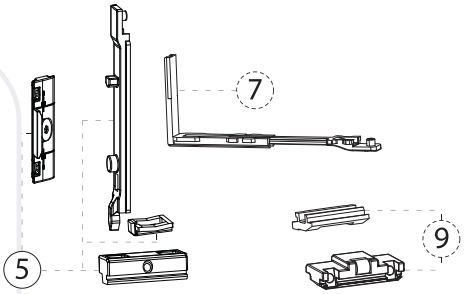

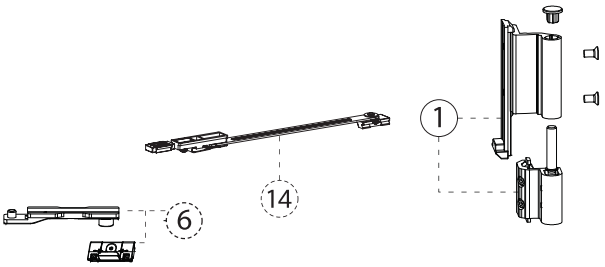

TILT & TURN SET · TECHNICAL DATA

80 KG STANDARD SET

80 kg	400-1300 mm	550-2400 mm
Max. sash weight	Sash width W	Sash height H

No	Part	Application range, mm
STANDARD SET		
1	Hinge set A	400 < W < 1300 · 550 < H < 2400
2	Stay — size 1	400 < W < 600
	Stay — size 2	601 < W < 1300
3	Handle	—
4	Handle drive set 1	—
4.1	Handle drive set 2 · alternative	—
5	Locking set 1 · corner drive with tab	—
	Locking set 2 · corner drive with latch, alternative	—
OPTIONS · not included in the set, ordered separately		
6	Rear locking set	1200 < H < 2400
7	Keeper	1200 < W < 1300
8	Additional stay	1200 < W < 1300
9	Roller sash lifter	1200 < W < 1300
10	Additional locking pin	1200 < W < 1300
14	Opening restrictor · size 1 · size 2	400 < W <1300

APPLICATION RANGE

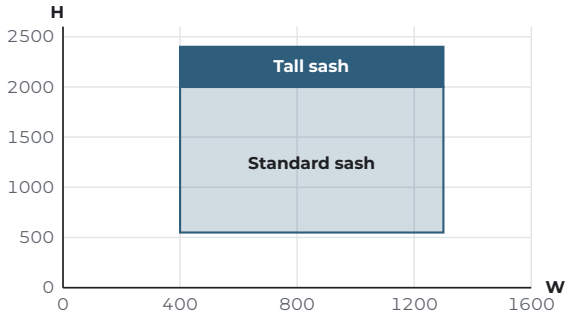

Standard sash
W 400–1300 · H 550–2000

Tall sash
W 400–1300 · H 2000–2400

W, H: sash outer dimensions (mm). Sash weight must not exceed 80 kg.

Part numbers match the assembly diagram on p. 09.

304 CE ift TSE

TILT & TURN SET · ASSEMBLY DIAGRAM

100 KG STANDARD SET

W 400–1300 · H 550–2400 mm

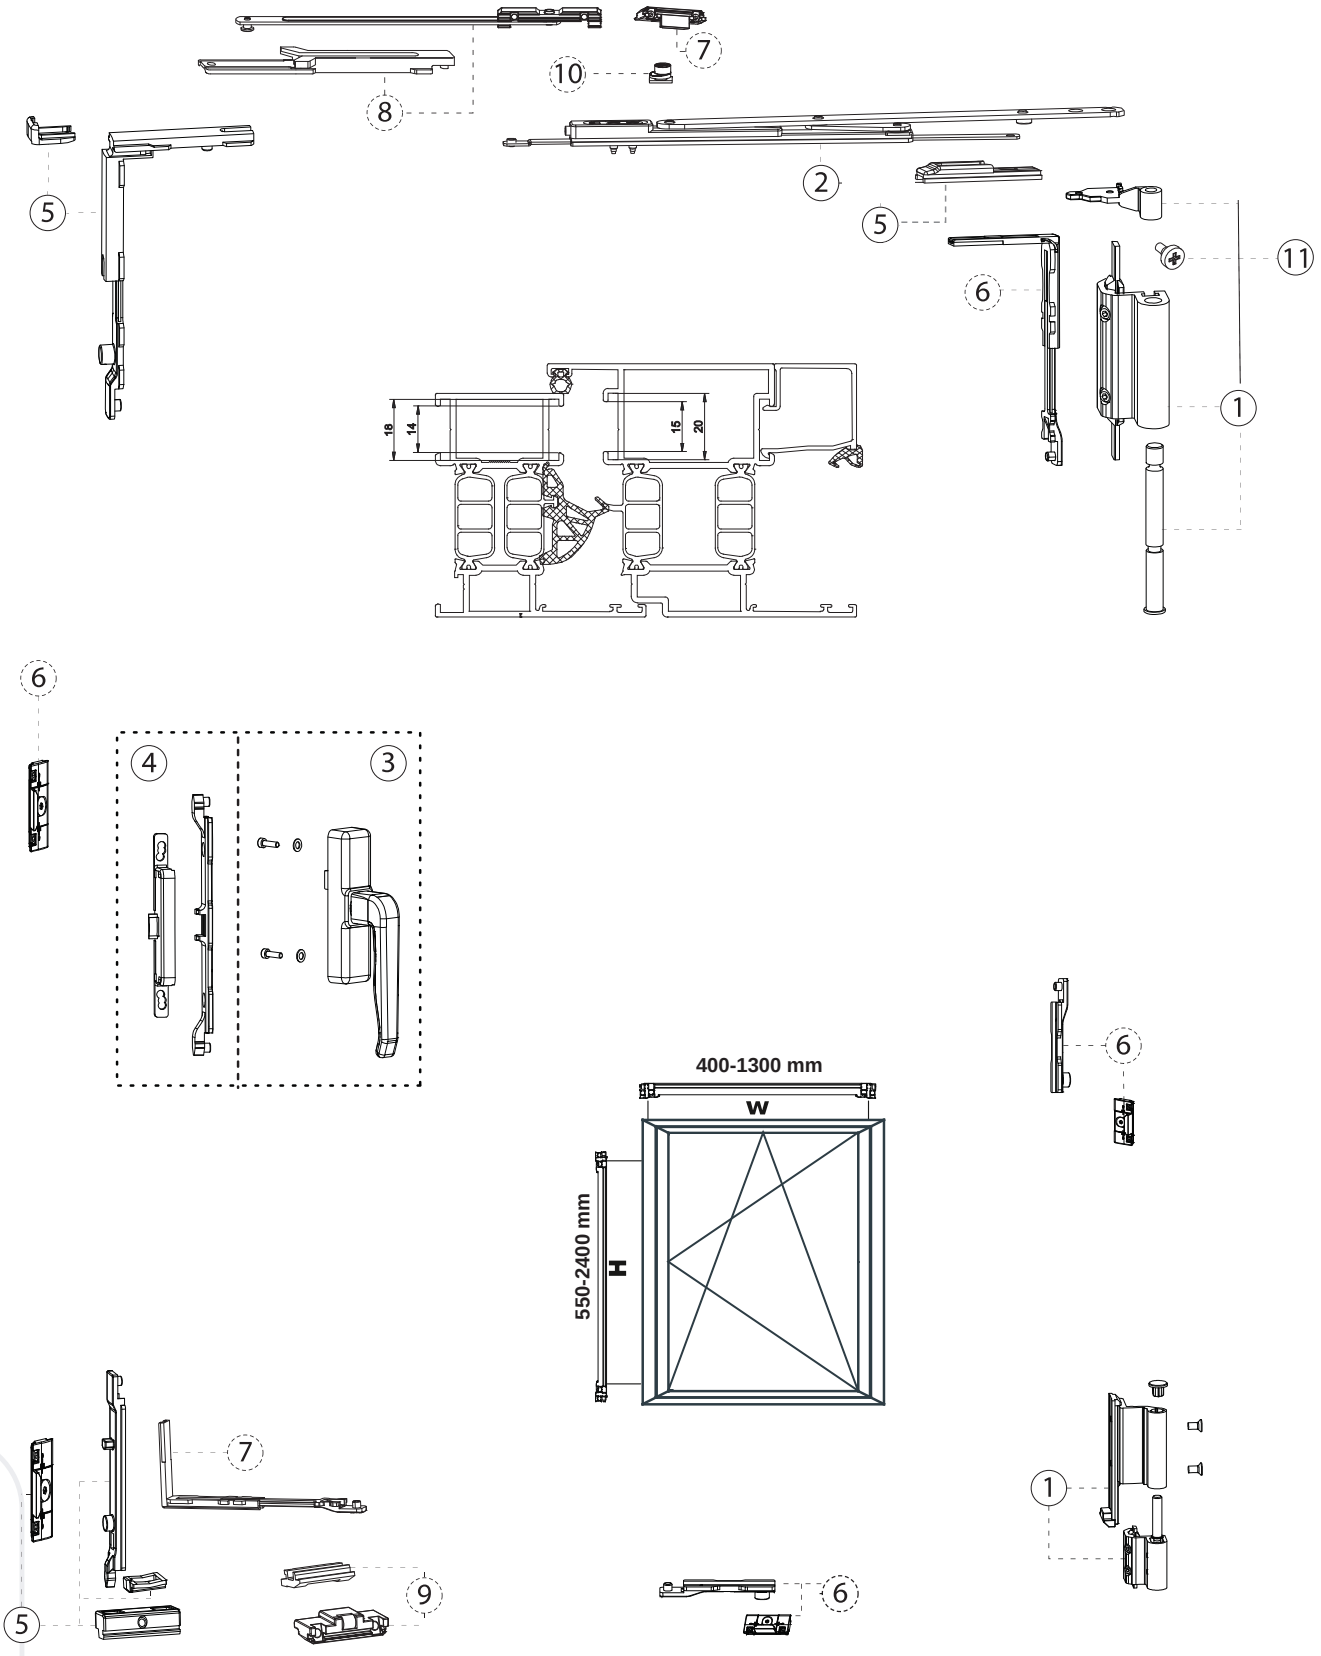

TILT & TURN SET · TECHNICAL DATA

100 KG STANDARD SET

100 kg	400-1300 mm	550-2400 mm
Max. sash weight	Sash width W	Sash height H

No	Part	Application range, mm
STANDARD SET		
1	Hinge set A · 10 pcs/box	400 < W < 1300 · 550 < H < 2400
2	Stay — size 1	400 < W < 600
	Stay — size 2	601 < W < 1300
3	Handle	—
4	Handle drive set 1	—
4.1	Handle drive set 2 · alternative	—
5	Locking set 1 · corner drive with tab	—
	Locking set 2 · corner drive with latch, alternative	—
11	Top hinge support screw — 100 kg	—
OPTIONS · not included in the set, ordered separately		
6	Rear locking set	1200 < H < 2400
7	Keeper	1200 < W < 1300
8	Additional stay	1200 < W < 1300
9	Roller sash lifter	1200 < W < 1300
10	Additional locking pin	1200 < W < 1300

APPLICATION RANGE

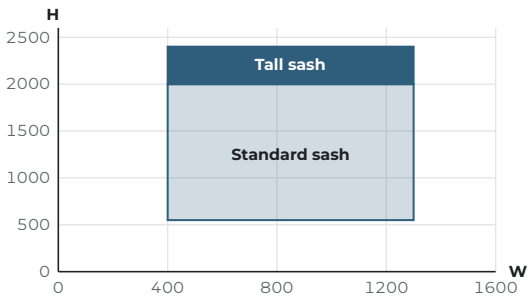

Standard sash
W 400–1300 · H 550–2000

Tall sash
W 400–1300 · H 2000–2400

W, H: sash outer dimensions (mm). Sash weight must not exceed 100 kg.

Part numbers match the assembly diagram on p. 11.

304 CE ift TSE

TILT & TURN SET · ASSEMBLY DIAGRAM

130 KG STANDARD SET

W 400–1300 · H 550–2400 mm

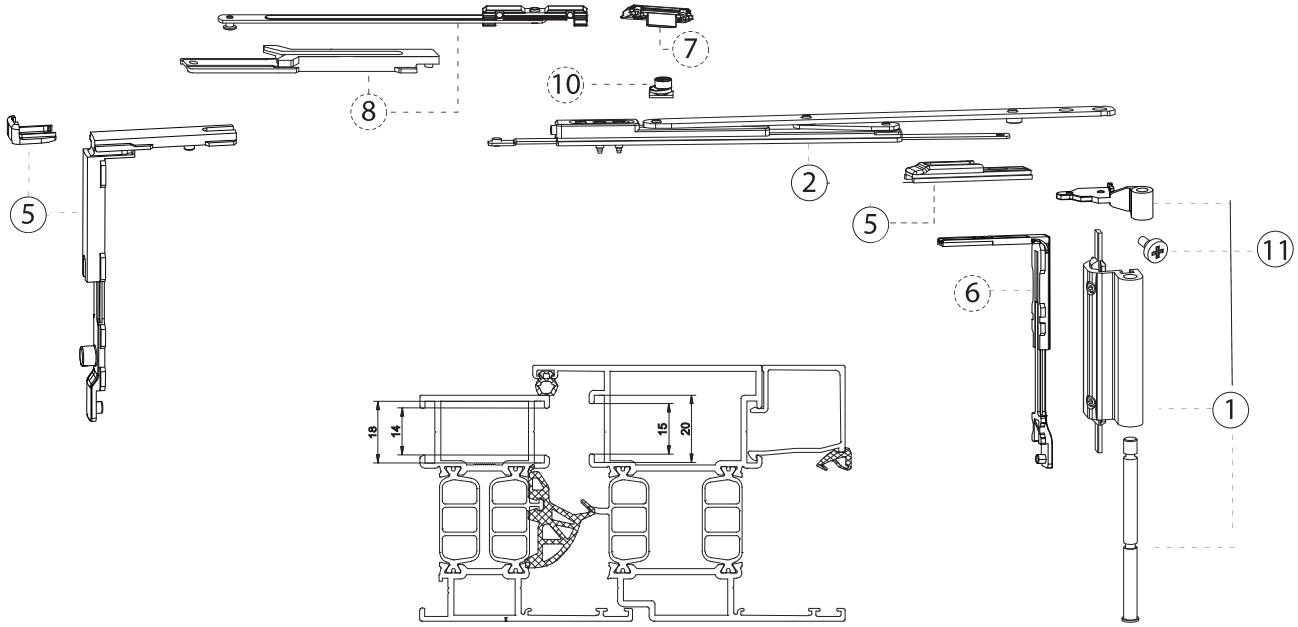

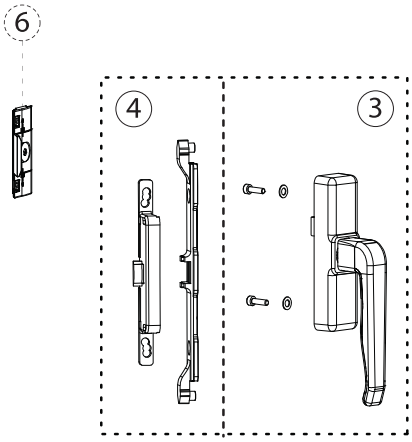

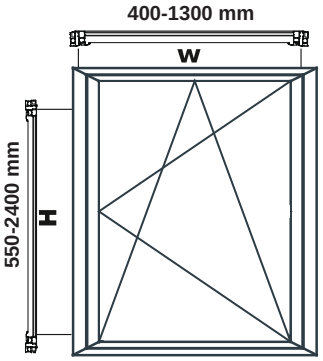



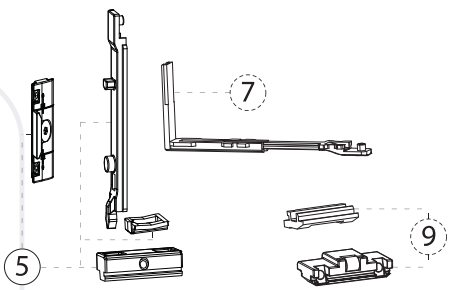

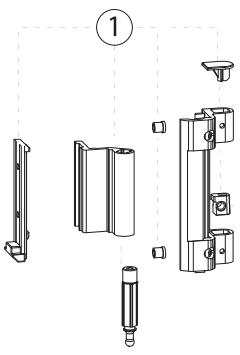

TILT & TURN SET · TECHNICAL DATA

130 KG STANDARD SET

130 kg	400-1300 mm	550-2400 mm
Max. sash weight	Sash width W	Sash height H

No	Part	Application range, mm
STANDARD SET		
1	Hinge set B	400 < W < 1300 · 550 < H < 2400
2	Stay — size 1	400 < W < 600
	Stay — size 2	601 < W < 1300
3	Handle	—
4	Handle drive set 1	—
4.1	Handle drive set 2 · alternative	—
5	Locking set 1 · corner drive with tab	—
	Locking set 2 · corner drive with latch, alternative	—
11	Top hinge support screw — 130 kg	—
OPTIONS · not included in the set, ordered separately		
6	Rear locking set	1200 < H < 2400
7	Keeper	1200 < W < 1300
8	Additional stay	1200 < W < 1300
9	Roller sash lifter	1200 < W < 1300
10	Additional locking pin	1200 < W < 1300

APPLICATION RANGE

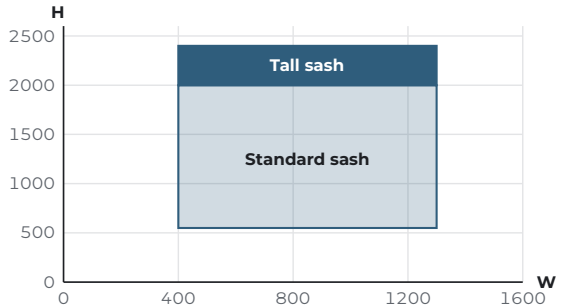

Standard sash
W 400–1300 · H 550–2000

Tall sash
W 400–1300 · H 2000–2400

W, H: sash outer dimensions (mm). Sash weight must not exceed 130 kg.

Part numbers match the assembly diagram on p. 13.

304 CE ift TSE

TILT & TURN SET · ASSEMBLY DIAGRAM

150 KG STANDARD SET

W 400–1300 · H 550–2600 mm

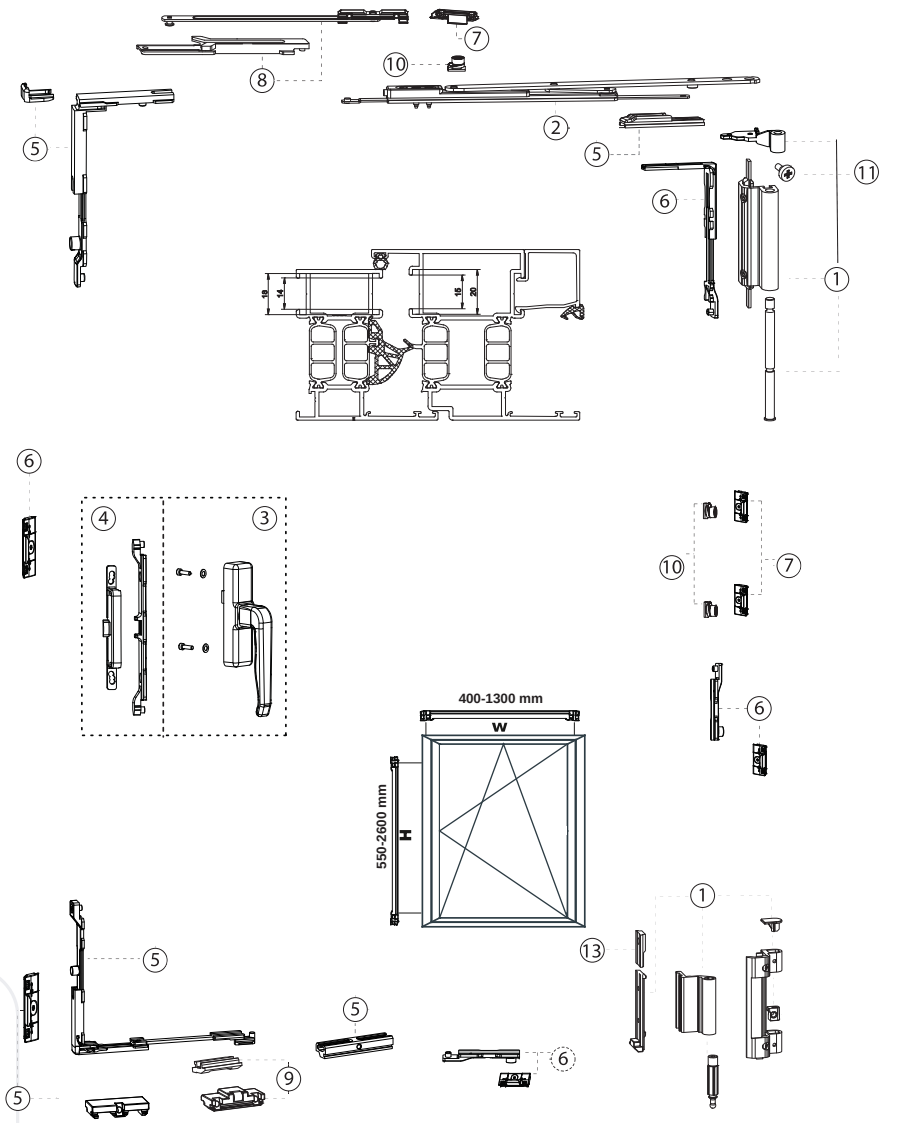

TILT & TURN SET · TECHNICAL DATA

150 KG STANDARD SET

150 kg
Max. sash weight

400-1300 mm
Sash width W

550-2600 mm
Sash height H

No	Part	Application range, mm
STANDARD SET		
1	Hinge set B · 10 pcs/box	400 < W < 1300 · 550 < H < 2600
2	Stay — size 1	400 < W < 600
	Stay — size 2	601 < W < 1300
3	Handle	—
4	Handle drive set 1	—
4.1	Handle drive set 2 · alternative	—
5	Horizontal Tilt Locking set 1 · corner drive with tab	—
5.1	Horizontal Tilt Locking set 2 · corner drive with latch – alternative	—
11	Top hinge support screw — 150 kg	—
13	Load transfer piece	—
OPTIONS · not included in the set, ordered separately		
6	Rear locking set	1200 < H < 2600
7	Keeper	1200 < W < 1300
8	Additional stay	1000 < W < 1300
10	Additional locking pin	1200 < W < 1300

APPLICATION RANGE

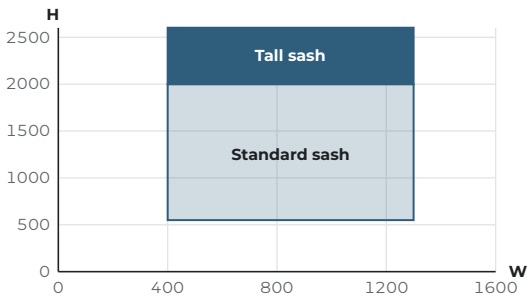

Standard sash
W 400–1300 · H 550–2400

Tall sash
W 400–1300 · H 2000–2600

W, H: sash outer dimensions (mm). Sash weight must not exceed 150 kg.

Part numbers match the assembly diagram on p. 15.

304 CE ift TSE

TILT & TURN SET · ASSEMBLY DIAGRAM

170 KG STANDARD SET

W 400–1300 · H 550–2800 mm

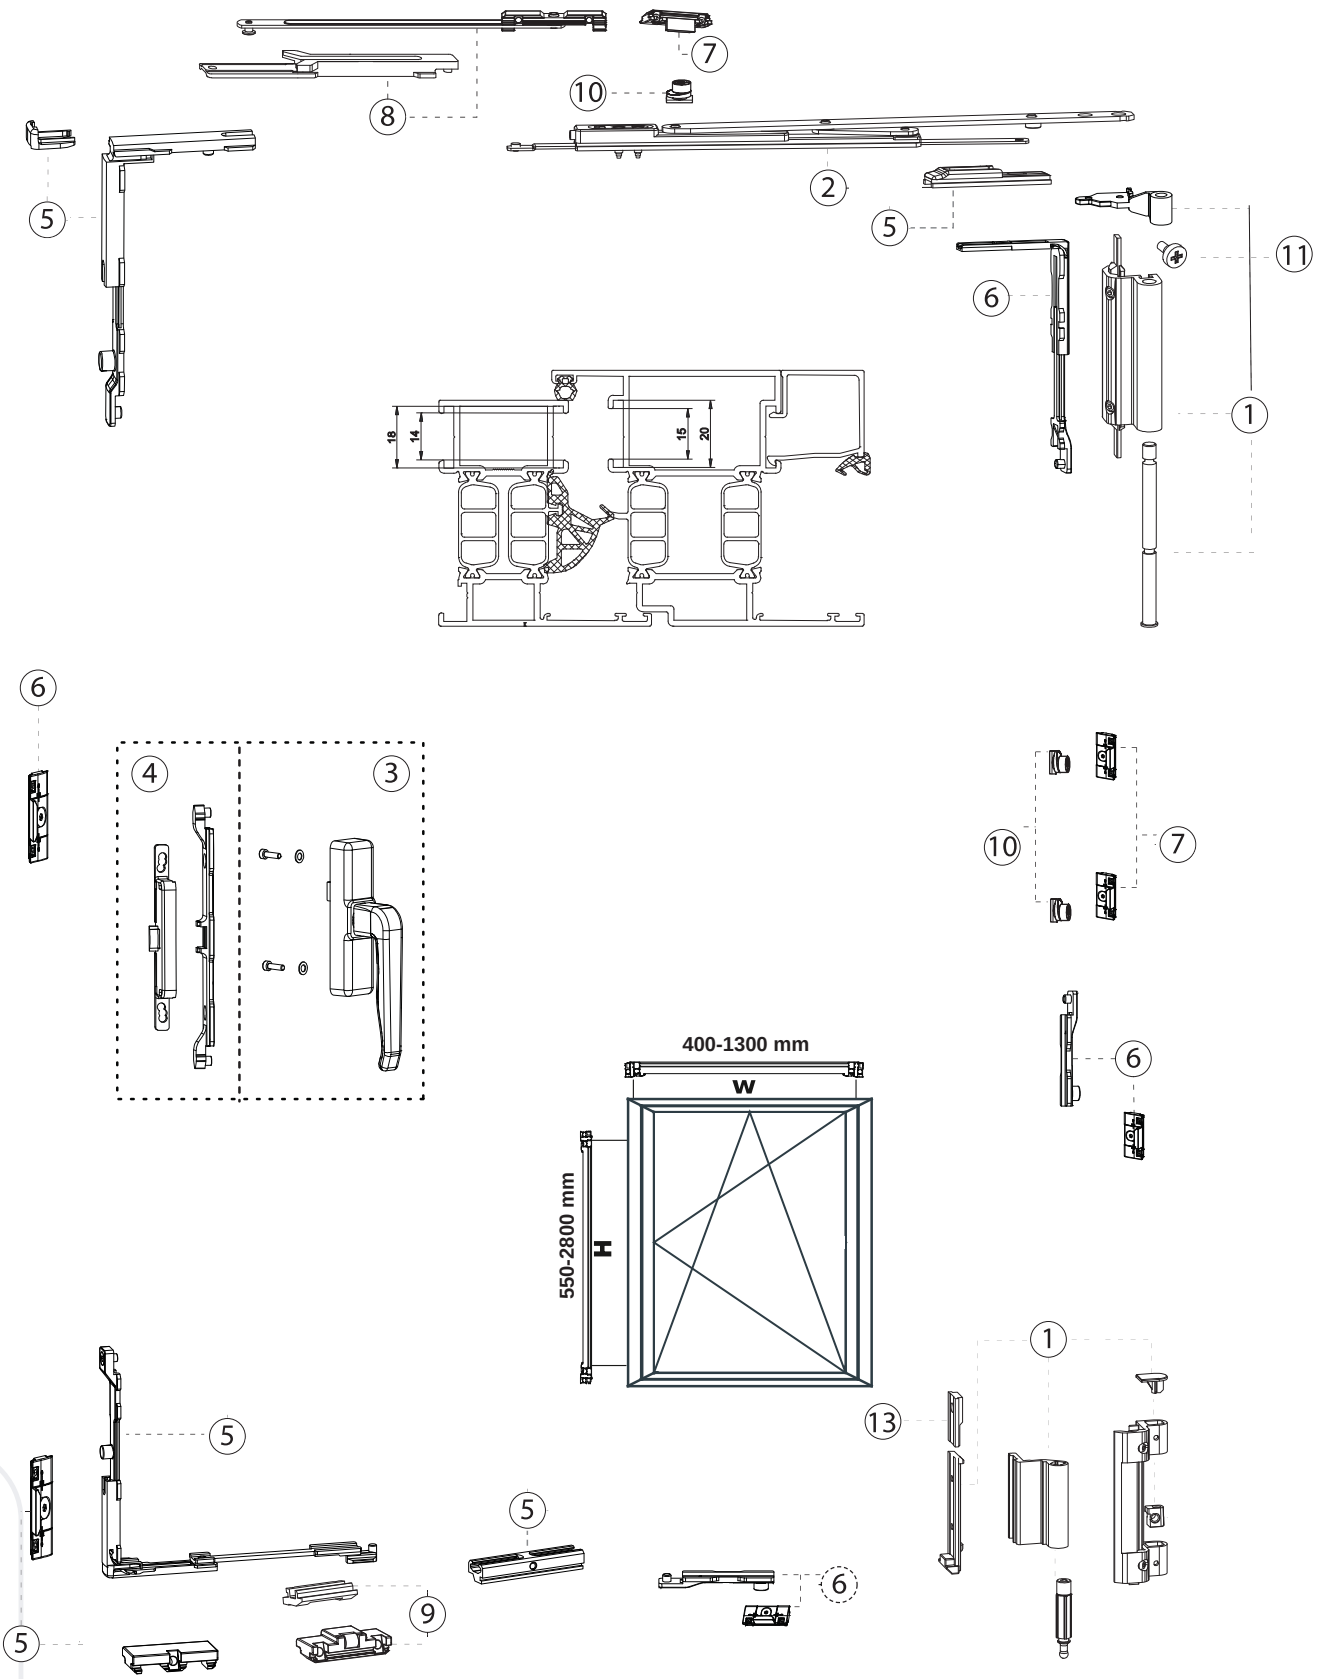

TILT & TURN SET · TECHNICAL DATA

170 KG STANDARD SET

170 kg
Max. sash weight

400-1300 mm
Sash width W

550-2800 mm
Sash height H

No	Part	Application range, mm
STANDARD SET		
1	Hinge set B	400 < W < 1300 · 550 < H < 2800
2	Stay — size 1	400 < W < 600
	Stay — size 2	601 < W < 1300
3	Handle	—
4	Handle drive set 1	—
4.1	Handle drive set 2 · alternative	—
5	Horizontal Tilt Locking set 1 · corner drive with tab	—
5.1	Horizontal Tilt Locking set 2 · corner drive with latch · alternative	—
6	Rear locking set	1200 < H < 2800
7	Keeper	1200 < W < 1300
8	Additional stay	1000 < W < 1300
9	Roller sash lifter	1200 < W < 1300
10	Additional locking pin	1200 < W < 1300
11	Top hinge support screw — 170 kg	—
13	Load transfer piece	—
OPTIONS · not included in the set, ordered separately		
6	Horizontal locking set · end piece + keeper	1020 < W < 1300

APPLICATION RANGE

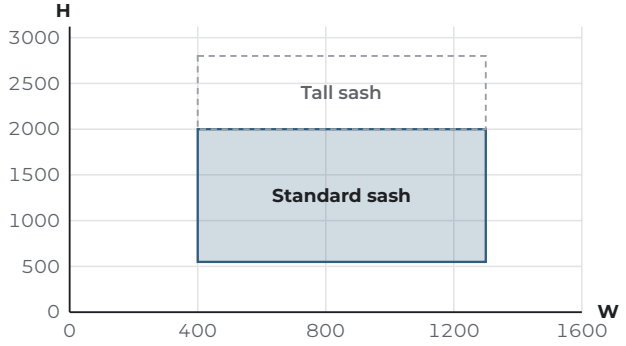

Standard sash
W 400–1300 · H 550–2000

Tall sash
H 2000–2800

W, H: sash outer dimensions (mm). Sash weight must not exceed 170 kg.

Part numbers match the assembly diagram on p. 17.

304 CE ift TSE

DOUBLE-SASH TILT & TURN SET · ASSEMBLY DIAGRAM

PASSIVE SASH OPENING

80-170 kg

ASSEMBLY DIAGRAM

View from inside · passive sash

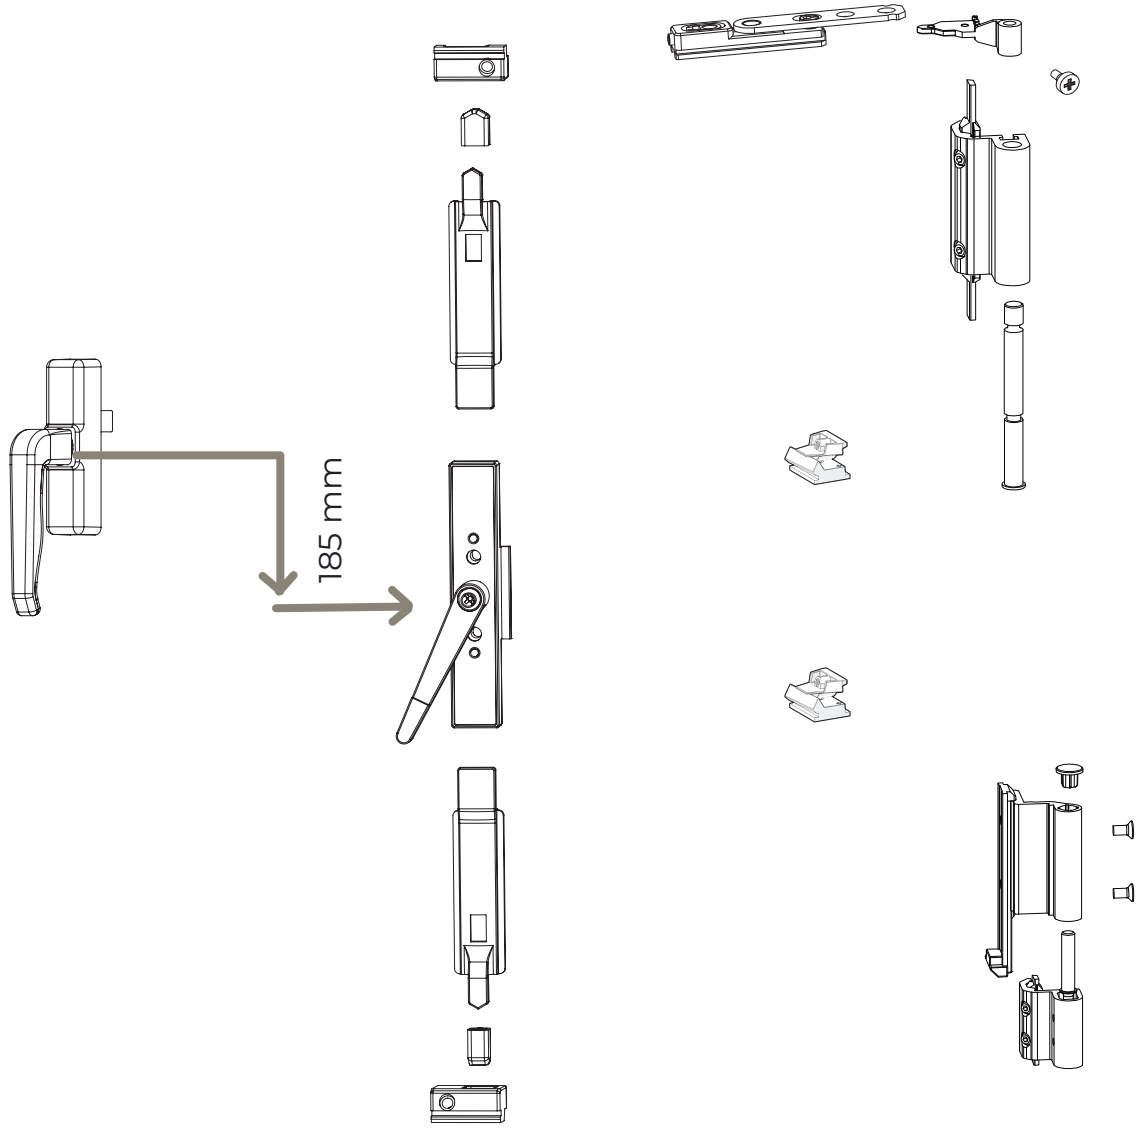

PROFILE SECTION

active and passive sash joint



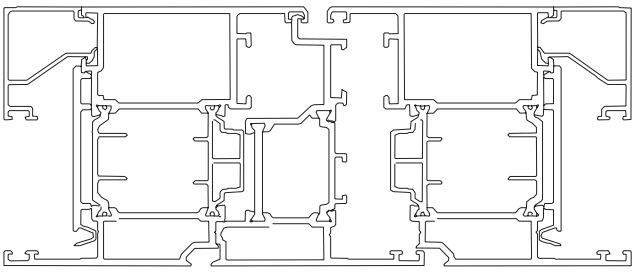

DOUBLE-SASH TILT & TURN SET · TECHNICAL DATA

PASSIVE SASH SET

80-170 kg
Max. sash weight

Passive sash
Double-sash application

No	Part	Qty
SET CONTENTS		
1	Passive Concealed Lever Handle set	1 set
3	Turn-Only Stay	1
4	Hinge set	1 set
5	Top hinge support screw	1
6	Pressure block set	2

APPLICATION NOTES



- Used for the passive (second) sash of double-sash windows.
- Sash weight must not exceed 170 kg.

The parts list matches the assembly diagram on p. 19.

304 CE ift TSE

TILT & TURN SET · ACCESSORY

CONCEALED LEVER HANDLE SET

1 CONCEALED LEVER SET

4 Hinge set A

80 – 100 kg · top and bottom hinge

4 Hinge set B

130 - 150 - 170 kg · top and bottom hinge

3 Turn-only stay



6 Pressure block set

Images are for illustration · please state the product code when ordering

304 | CE | ift | TSE

OPENING SYSTEMS

TURN-ONLY SETS

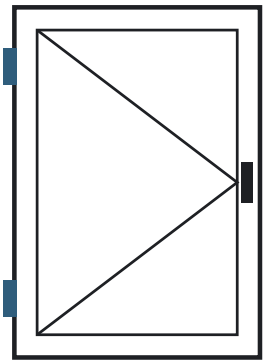

TURN-ONLY

TURN ONLY

When the handle is turned 90°, the sash opens inward; there is no tilt position. The sash is carried at the top by the turn-only stay.

170 kg
Max. sash weight

400-1300 mm
Sash width W

550-2800 mm
Sash height H

SETS

Select by sash weight and size · dashed: 100 kg only

ECO SET p. 26

80-130 kg — W 400–1000, H 550–1250

SET CONTENTS

1	Hinge set A	1 set
3	Handle	1
4	Handle drive set	1
5	Locking set	3
15	Turn-only stay	1
18	Restrictor	1
11	Support screw · 100 kg	1

STANDARD SET p. 27

80-130 kg — W 400–1000, H 550–2000

SET CONTENTS

1	Hinge set A	1 set
3	Handle	1
4	Handle drive set	1
5	Locking set	3
15	Turn-only stay	1
16	Pressure block set	2
18	Restrictor	1
11	Support screw · 100 kg	1

PERIMETER LOCKING p. 28

80-130 kg — W 400–1300, H 550–2400

SET CONTENTS

1	Hinge set A	1 set
3	Handle	1
4	Handle drive set	1
5	Locking set	3 + 4
15	Turn-only stay	1
16	Pressure block set	3
17	Hex corner drive	2
11	Support screw · 100 kg	1

PERIMETER LOCKING · HEAVY SASH p. 29

150 kg — With tilt & turn stay and heavy-sash hinge — W 400–1300, H 550–2600

PERIMETER LOCKING · HEAVY SASH p. 30

170 kg — With tilt & turn stay and heavy-sash hinge — W 400–1300, H 550–2800

System sets p. 23–24 · assembly diagrams p. 26–30 · technical data p. 31–35

304 | CE | ift | TSE

TURN-ONLY SET · STANDARD PARTS

SYSTEM SETS 1-7

Numbers match the diagrams and parts lists. Hinge set, handle and handle drive are shared with tilt & turn.

1 Hinge set A
80 – 100 kg · top and bottom hinge
10 pcs / box

1 Hinge set B
130 - 150 - 170 kg · top and bottom hinge
10 pcs / box

5 Turn-only stay
– pcs / box

3 Handle
10 pcs / box

4 Handle Drive
20 pcs / box

6 Top hinge support screw
100 -130· 150 · 170 kg
20 pcs / box



7 Pressure block set
20– pcs / box

2 Opening Restrictor
Size 1 400-1000mm
Size 2 1001-1300mm
10– pcs / box

TURN-ONLY SET · SETS

LOCKING SETS 2

Perimeter, standard, eco and 150 kg perimeter locking sets. Numbers match the assembly diagrams.

2 **Perimeter Locking Set**

10 pcs / box

2 **Standard Locking Set**

10 pcs / box

2 **Eco Locking Set**

10 pcs / box

5 **Perimeter Locking Set** · 150 kg - 170 kg

10 pcs / box

TURN-ONLY SET · SETS

SYSTEM SETS 3

Additional system sets. Numbers match the assembly diagrams.

(2) **Tilt & Turn Special Stay**
150-170 kg
10 pcs / box

(1) **Fortis 2-Knuckle Turn-Only Hinge** 80kg
– pcs / box

(6) **Rear Locking set**
150-170 kg
10 pcs / box

(1) **Fortis 3-Knuckle Turn-Only Hinge**
100kg
– pcs / box

TURN-ONLY LOCKING SET · ASSEMBLY DIAGRAM

ECO SET

80-130 kg

ASSEMBLY DIAGRAM

View from inside · hinges on right

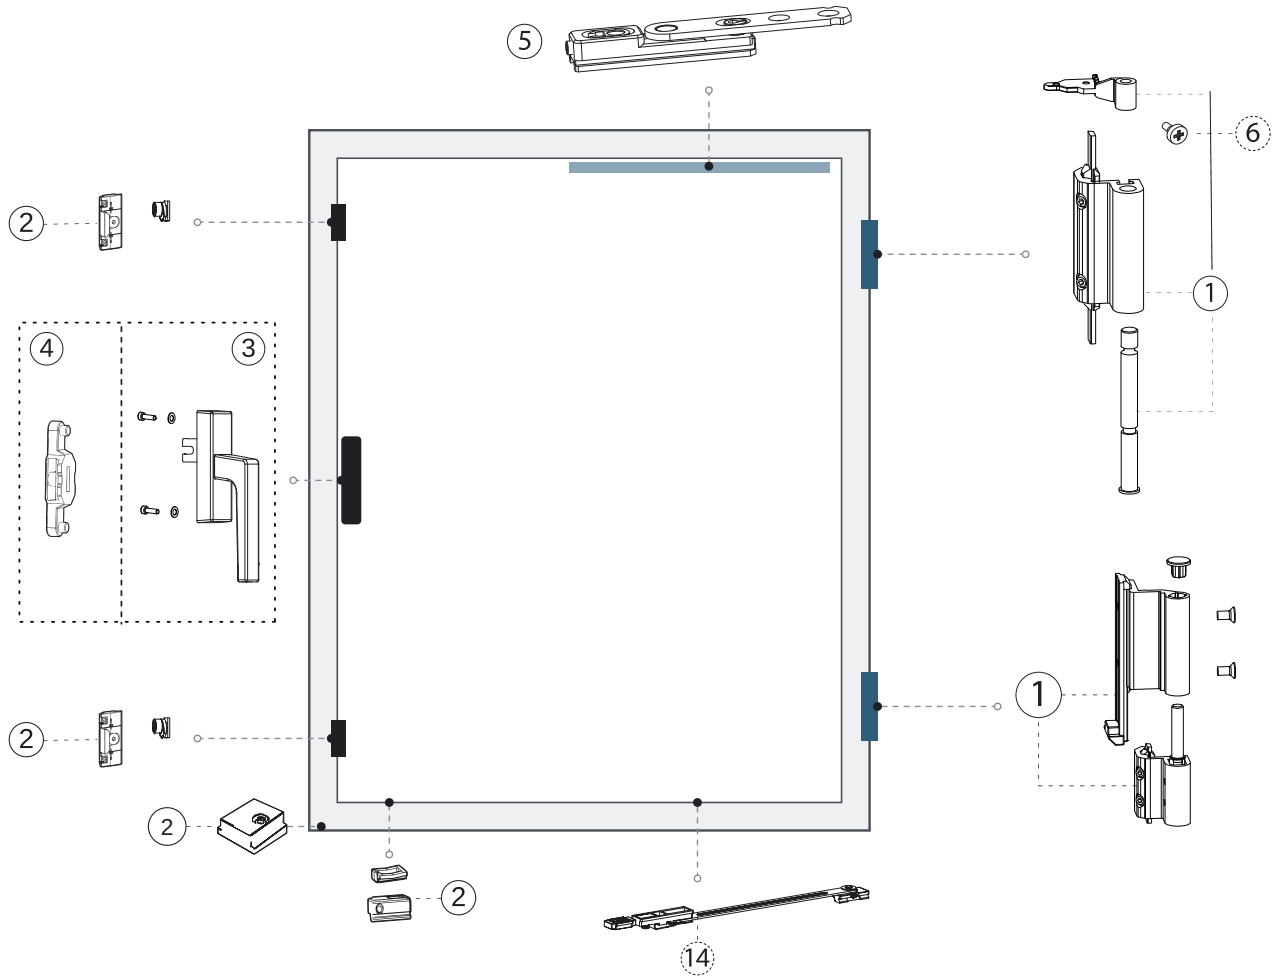

SASH SIZE

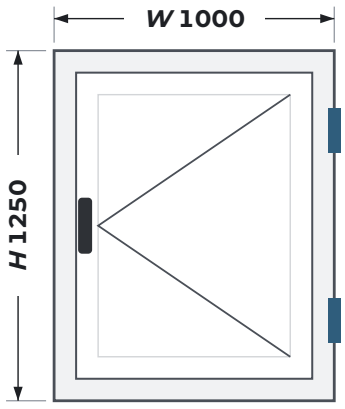

sash outer dimension, mm

PROFILE SECTION

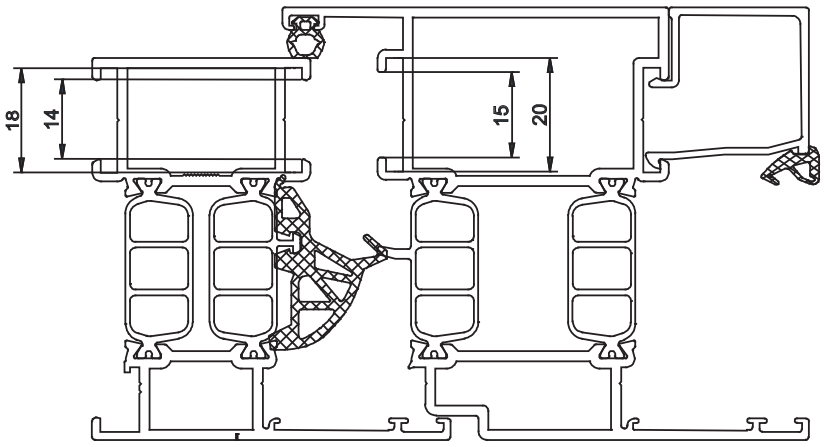

TURN-ONLY LOCKING SET · ASSEMBLY DIAGRAM

STANDARD SET

80-130 kg

ASSEMBLY DIAGRAM

View from inside · hinges on right

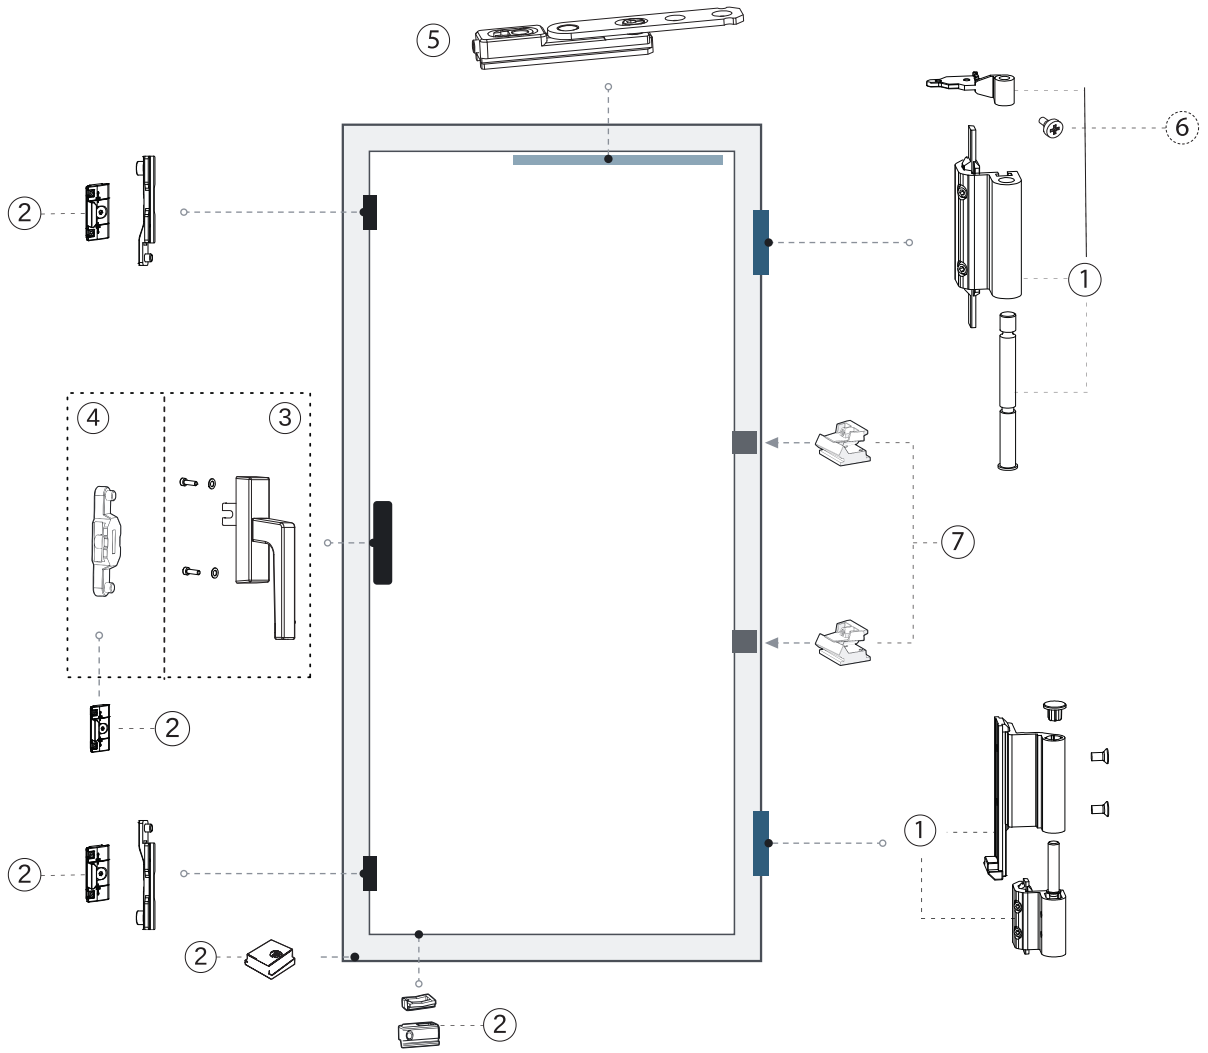

SASH SIZE

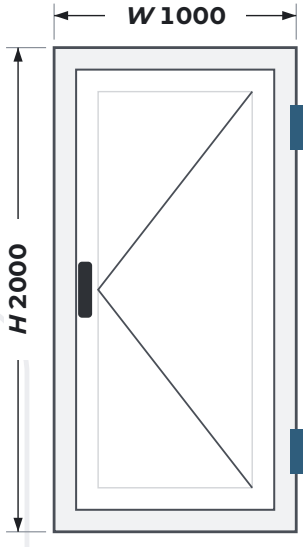

sash outer dimension, mm

PROFILE SECTION

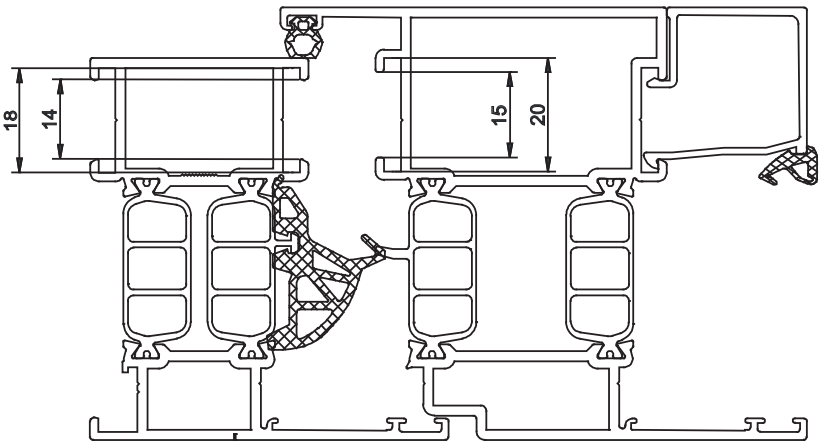

TURN-ONLY LOCKING SET · ASSEMBLY DIAGRAM

PERIMETER LOCKING SET

80-130 kg

ASSEMBLY DIAGRAM

View from inside · hinges on right

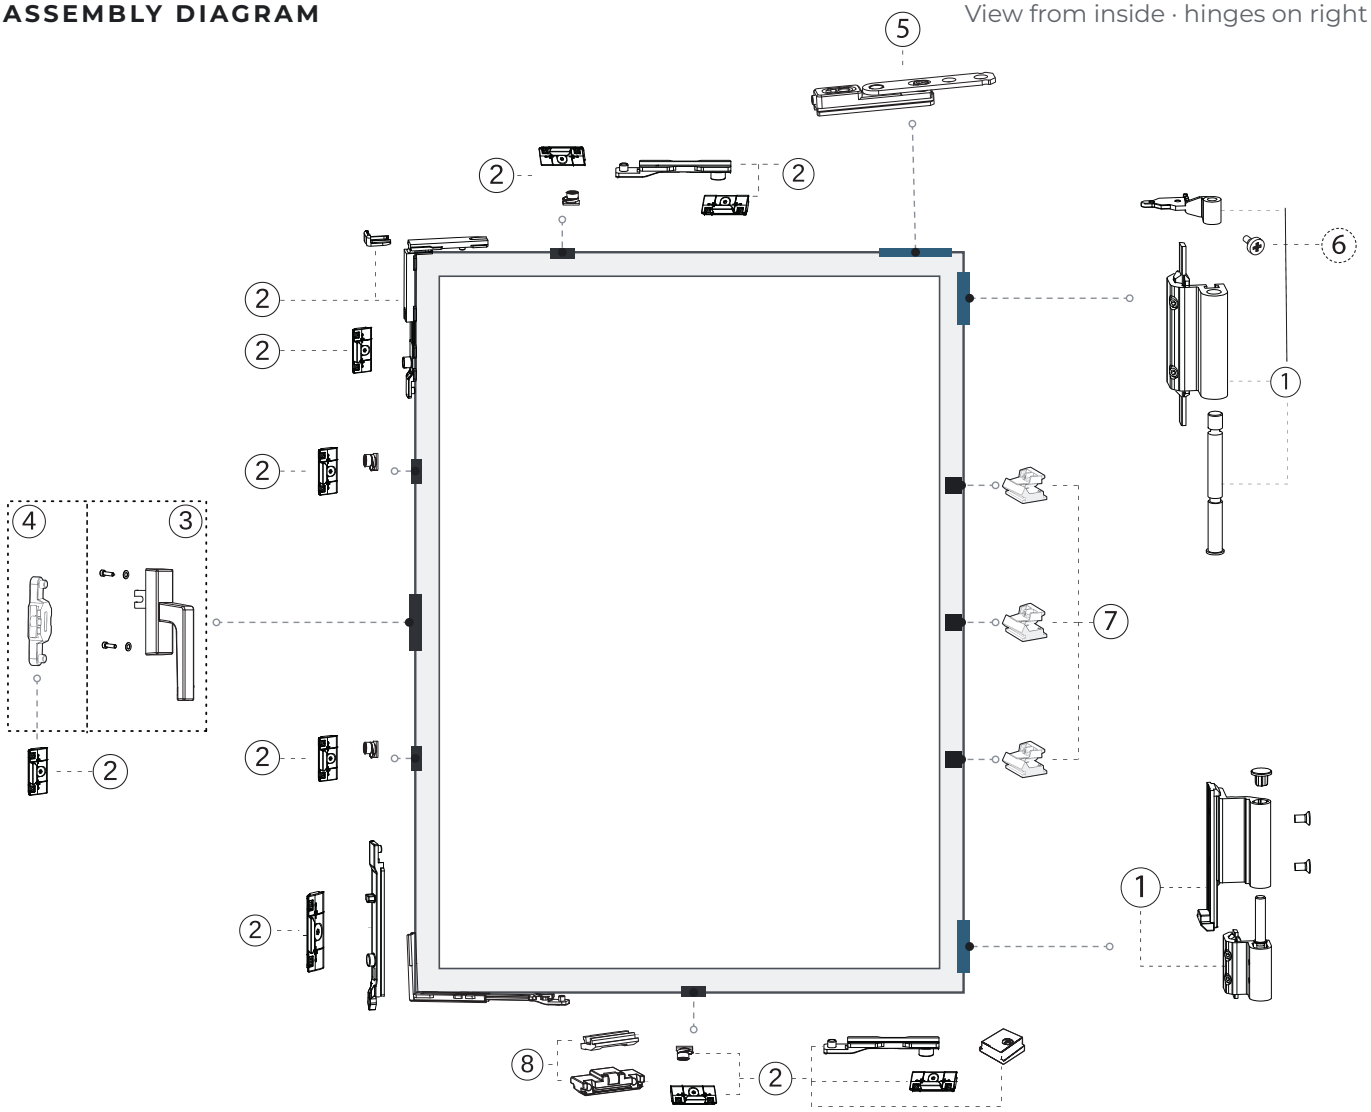

SASH SIZE

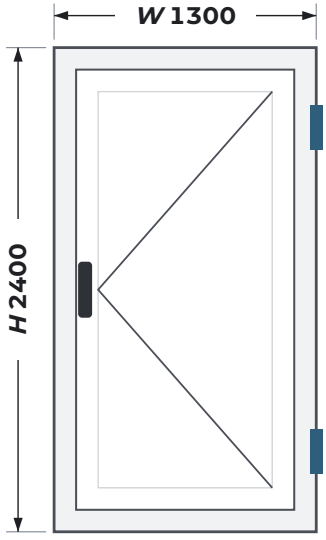

sash outer dimension, mm

PROFILE SECTION

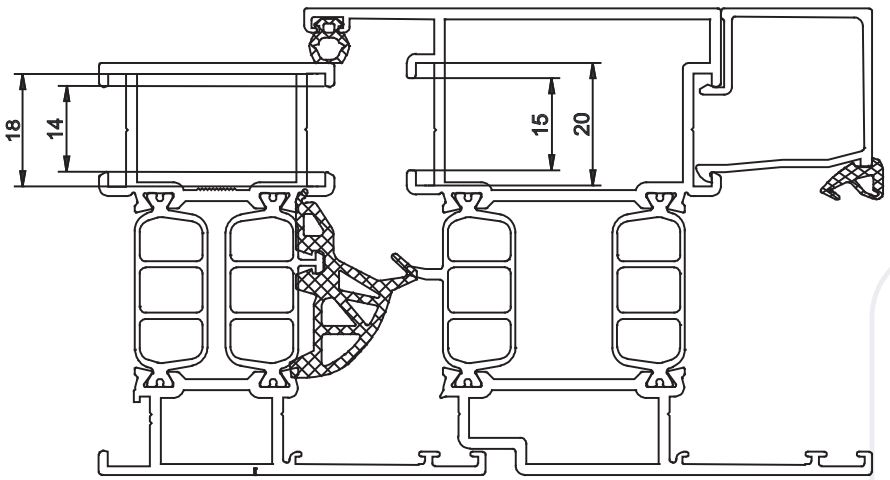

TURN-ONLY LOCKING SET · ASSEMBLY DIAGRAM

PERIMETER LOCKING SET

150 kg

ASSEMBLY DIAGRAM

View from inside · hinges on right

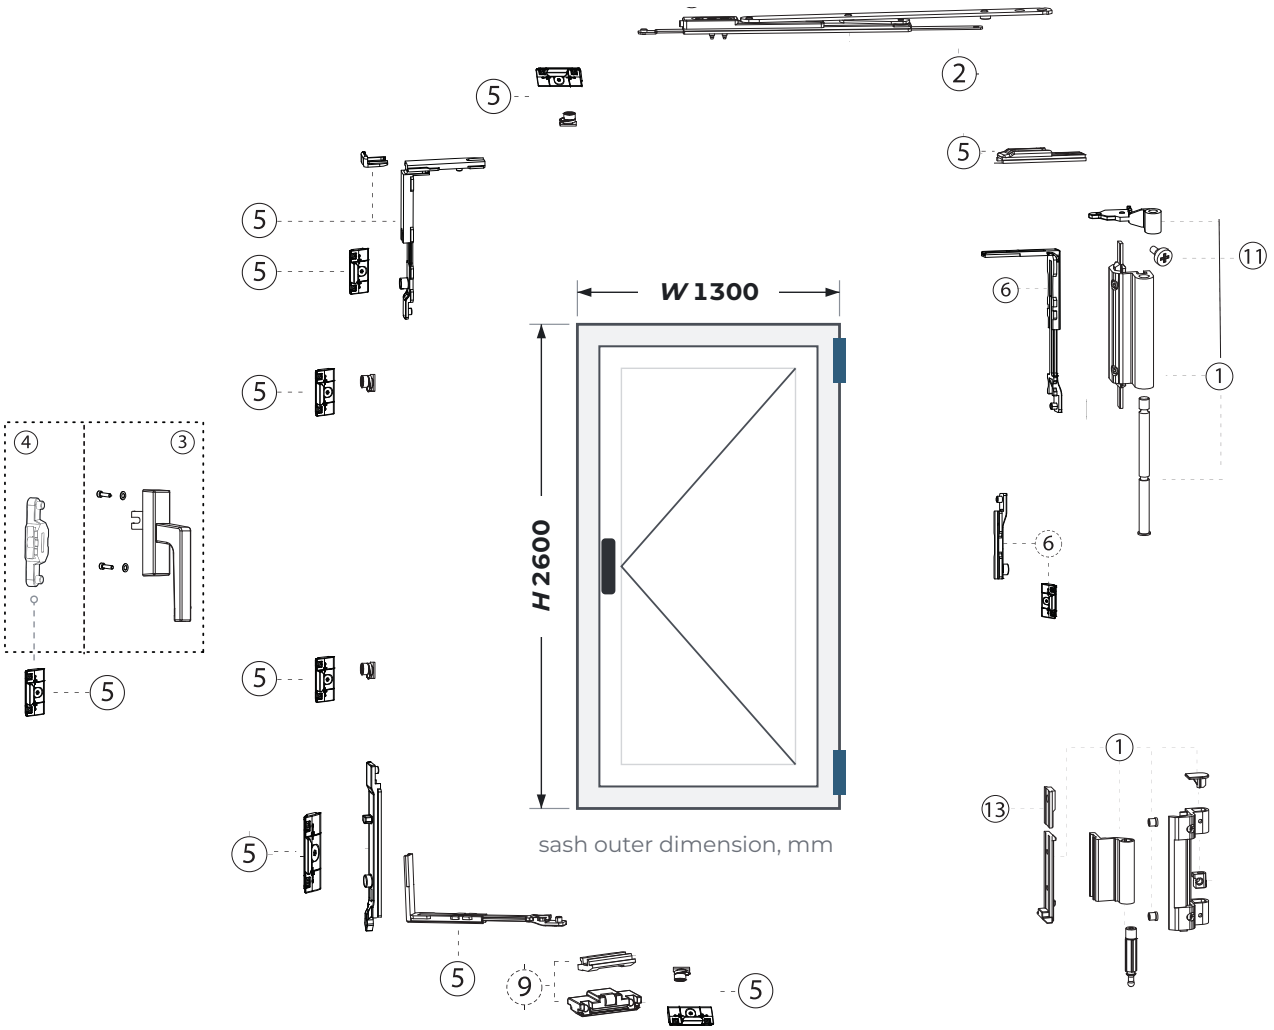

PROFILE SECTION

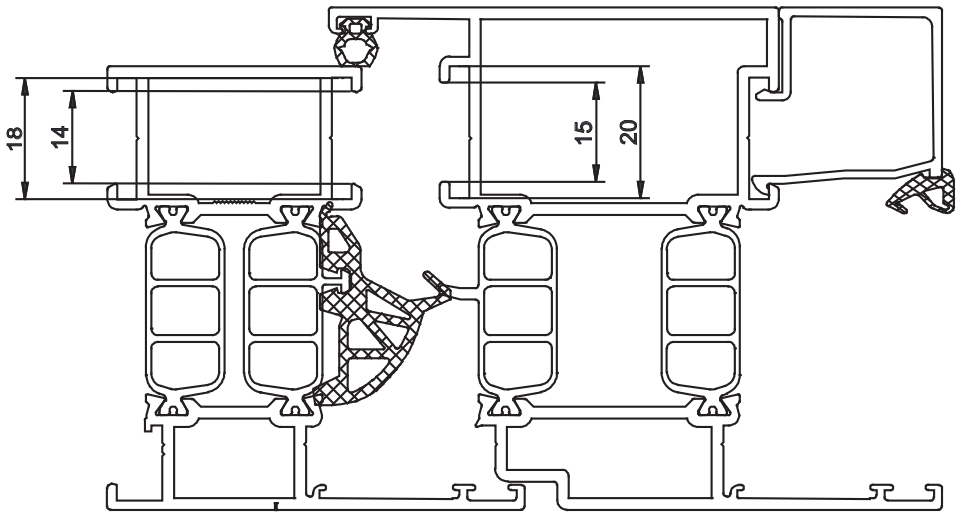

TURN-ONLY LOCKING SET · ASSEMBLY DIAGRAM

PERIMETER LOCKING SET

170 kg

ASSEMBLY DIAGRAM

View from inside · hinges on right

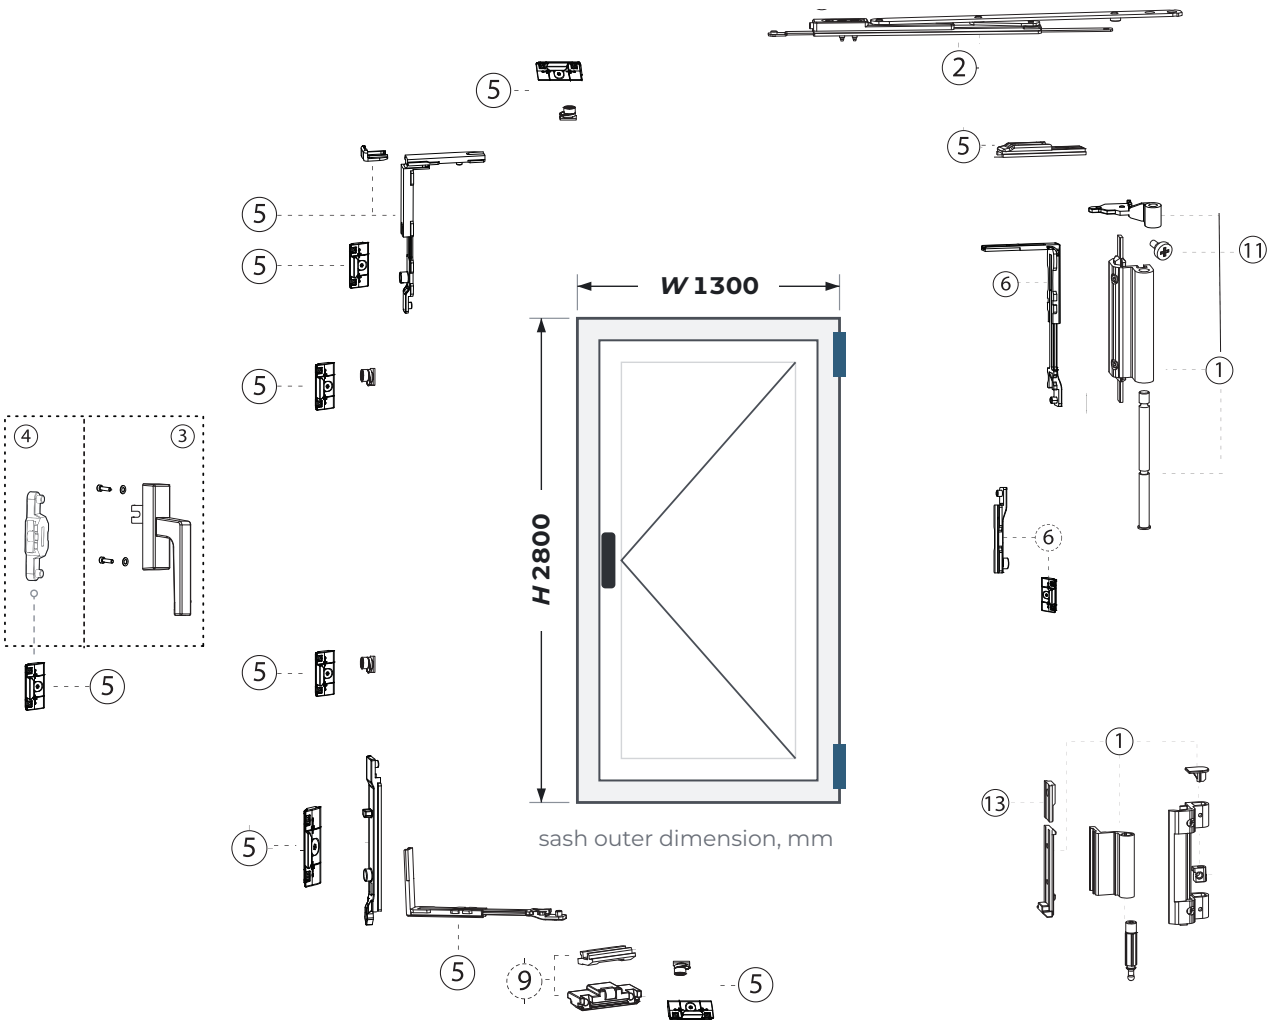

PROFILE SECTION

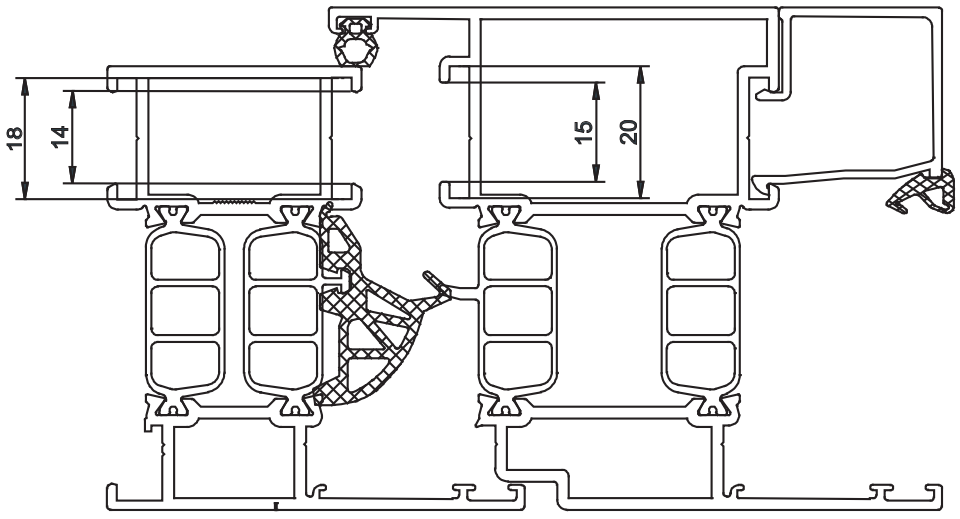

TURN-ONLY LOCKING SET · TECHNICAL DATA

ECO SET 80-130 KG

80-130 kg	400-1000 mm	550-1250 mm
Max. sash weight	Sash width W	Sash height H

No	Part	Qty
SET CONTENTS		
1	Hinge set A	1 set
2	T.O. Eco locking set	1 set
3	Handle	1
4	Handle drive set	1
5	Turn-only stay	1
100–130 KG ADD-ON SET · only for 100 and 130 kg sashes		
6	Top hinge support screw	1
OPTIONS · not included in the set, ordered separately		
14	Window limiter · size 1 · size 2	1

APPLICATION RANGE

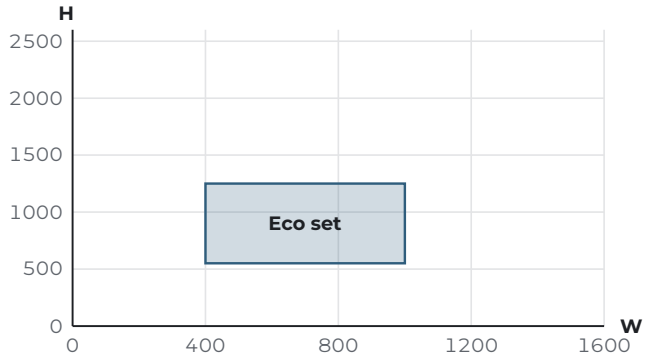

Eco set
W 400–1000 · H 550–1250

W, H: sash outer dimensions (mm). Sash weight must not exceed 130 kg. Hinge set and handle are shared with tilt & turn (p. 06).

- State sash handing (DIN-L / DIN-R) when ordering.

Part numbers match the assembly diagram on p. 26.

304 CE ift TSE

TURN-ONLY LOCKING SET · TECHNICAL DATA

STANDARD SET 80-130 KG

80-130 kg	400-1000 mm	550-2000 mm
Max. sash weight	Sash width W	Sash height H

No	Part	Qty
SET CONTENTS		
1	Hinge set A	1 set
2	T.O. Standard locking set	1 set
3	Handle	1
4	Handle drive set	1
5	Turn-only stay	1
7	Pressure block set	2
100–130 KG ADD-ON SET · only for 100 and 130 kg sashes		
6	Top hinge support screw	1

APPLICATION RANGE

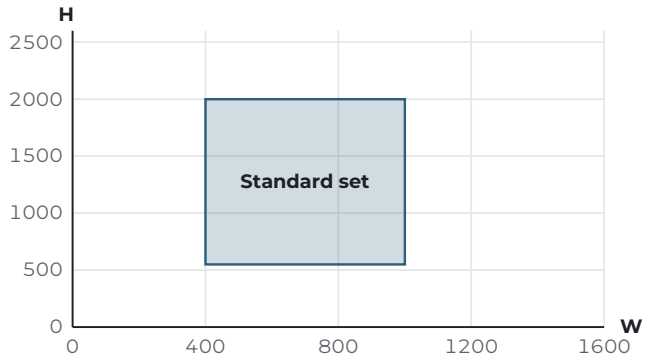

Standard set
W 400–1000 · H 550–2000

W, H: sash outer dimensions (mm). Sash weight must not exceed 130 kg. Hinge set and handle are shared with tilt & turn (p. 06).

- 2 concealed pressure blocks (7) on the hinge side, evenly spaced between the hinges.
- State sash handing (DIN-L / DIN-R) when ordering.

Part numbers match the assembly diagram on p. 27.

304 CE ift TSE

TURN-ONLY LOCKING SET · TECHNICAL DATA

PERIMETER LOCKING SET 80-130 KG

80-130 kg	400-1300 mm	550-2400 mm
Max. sash weight	Sash width W	Sash height H

No	Part	Qty
SET CONTENTS		
1	Hinge set A	1 set
2	T.O. Perimeter locking set	1 set
3	Handle	1
4	Handle drive set	1
5	Turn-only stay	1
7	Pressure block set	3
8	Roller sash lifter	1
100–130 KG ADD-ON SET · only for 100 and 130 kg sashes		
6	Top hinge support screw	1

APPLICATION RANGE

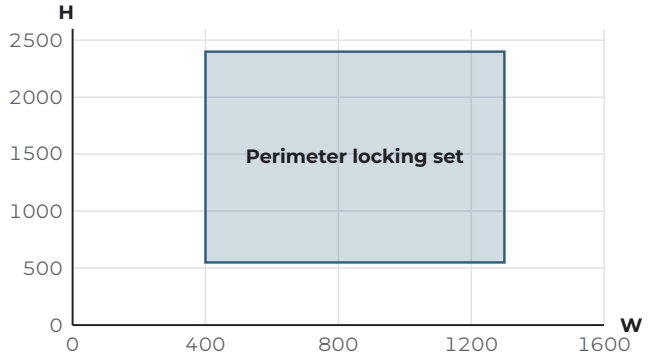

Perimeter locking set
W 400–1300 · H 550–2400

W, H: sash outer dimensions (mm). Sash weight must not exceed 130 kg. Hinge set and handle are shared with tilt & turn (p. 06).

- 3 concealed pressure blocks (7) on the hinge side, evenly spaced.
- State sash handing (DIN-L / DIN-R) when ordering.

Part numbers match the assembly diagram on p. 28.

304 CE ift TSE

TURN-ONLY LOCKING SET · TECHNICAL DATA

PERIMETER LOCKING SET 150 KG

150 kg	600-1300 mm	550-2600 mm
Max. sash weight	Sash width W	Sash height H

No	Part	Qty
SET CONTENTS		
1	Hinge set B	1 set
2	Tilt & turn special stay	1
3	Handle	1
4	Handle drive set	1
5	T.O. Perimeter locking set · corner drive with tab	1 set
7	Pressure block set	3
11	Top hinge support screw	1
12	Frame hinge clamping piece	1
13	Load transfer piece	1
OPTIONS · not included in the set, ordered separately		
6	Rear perimeter locking set	1 set
9	Roller sash lifter	1

APPLICATION RANGE

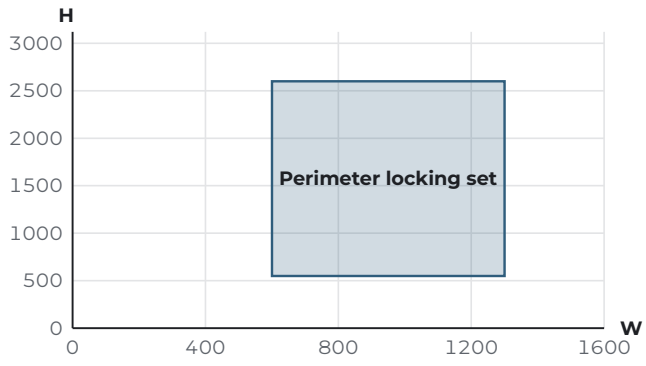

Perimeter locking set
W 600–1300 · H 550–2600

W, H: sash outer dimensions (mm). Max. sash weight 150 kg. Hinge set B, support screw and frame parts as in the 150 kg tilt & turn set (p. 15).

- 3 concealed pressure blocks (7) on the hinge side, evenly spaced.
- State sash handing (DIN-L / DIN-R) when ordering.

Part numbers match the assembly diagram on p. 29.

304 CE ift TSE

TURN-ONLY LOCKING SET · TECHNICAL DATA

PERIMETER LOCKING SET 170 KG

170 kg	600-1300 mm	550-2800 mm
Max. sash weight	Sash width W	Sash height H

No	Part	Qty
SET CONTENTS		
1	Hinge set B	1 set
2	Tilt & turn special stay	1
3	Handle	1
4	Handle drive set	1
5	T.O. Perimeter locking set · corner drive with tab	1 set
7	Pressure block set	3
11	Top hinge support screw	1
13	Load transfer piece	1
OPTIONS · not included in the set, ordered separately		
6	Rear perimeter locking set	1 set
9	Roller sash lifter	1

APPLICATION RANGE

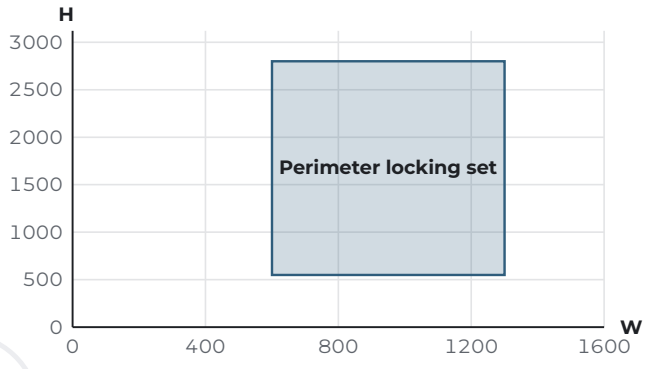

Perimeter locking set
W 600–1300 · H 550–2800

W, H: sash outer dimensions (mm). Max. sash weight 170 kg. Hinge set B, support screw and frame parts as in the 170 kg tilt & turn set (p. 17).

- 3 concealed pressure blocks (7) on the hinge side, evenly spaced.
- State sash handing (DIN-L / DIN-R) when ordering.

Part numbers match the assembly diagram on p. 30.

304 CE ift TSE

TILT & TURN · ACCESSORY

SAFETY LOCK SET

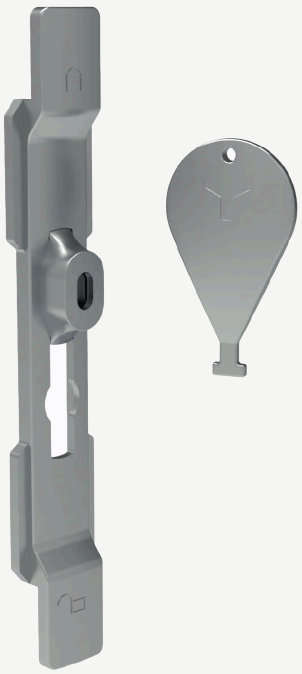

Safety lock + key
fitted to the locking bar on the handle side

FITTING DIMENSIONS

mm

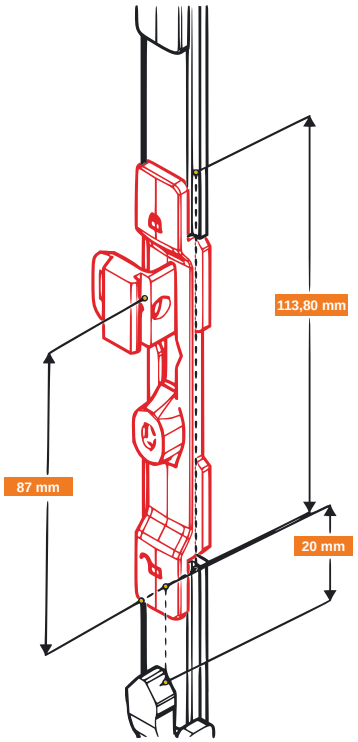

FUNCTION

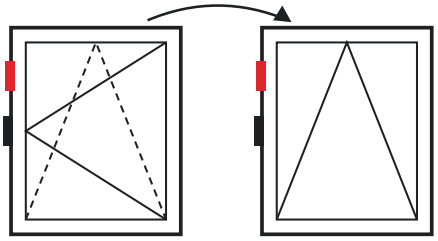

turn + tilt

tilt only

When locked with the key, the sash cannot be turned open; it can only tilt.

PROFILE SECTION

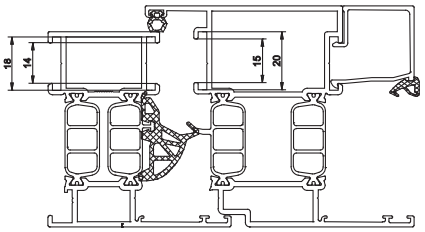

USE

3 steps

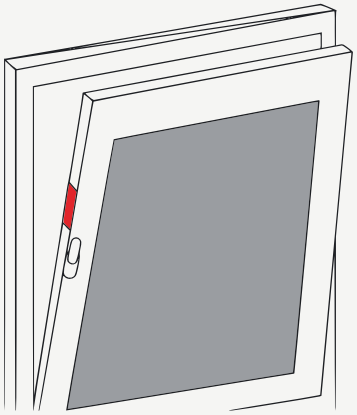

1 Position
Fitted above the handle.

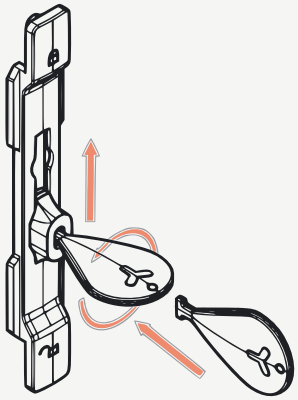

2 Lock
Insert the key and turn the lock closed.

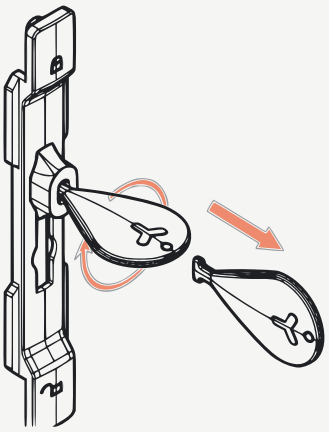

3 Remove the key
The sash can now only tilt.

For use with tilt & turn sets · dimensions in mm

304 | CE | ift | TSE

OPENING SYSTEMS · ACCESSORY

AUXILIARY ACCESSORIES

7 MM SQUARE SPINDLE ADAPTER

Description	With latch · 7 mm square spindle connection
Compatibility	All tilt & turn sets

7 MM SQUARE SPINDLE ADAPTER

Description	Without latch · 7 mm square spindle connection
Compatibility	All tilt & turn sets

Images are for illustration · please state the product code when ordering

304 CE ift TSE

OPENING SYSTEMS · ACCESSORY

AUXILIARY ACCESSORIES

BASE-MOUNTED ADJUSTABLE HOOK PIN

Description	Mushroom-head pin · Allen-adjustable
Compatibility	All tilt & turn sets



BASE-MOUNTED ADJUSTABLE PIN

Description	Flat-head pin · Allen-adjustable
Compatibility	All tilt & turn sets

HEX CORNER DRIVE

Description	Allen-adjustable corner drive
Compatibility	All tilt & turn sets

CORNER DRIVE WITH LATCH

Description	Corner drive with latch
Compatibility	All tilt & turn sets

WINDOW RESTRICTOR

Length options	size 1 · size 2
Compatibility	All tilt & turn sets

Images are for illustration · please state the product code when ordering

304 CE ift TSE

OPENING SYSTEMS · ACCESSORY

AUXILIARY ACCESSORIES

ADJUSTABLE KEEPER

Product code	391020
Description	Eurogroove c001 (14–18)

PIN GROUP KEEPER

Product code	399000
Description	Slide bolt and keeper group

TURN-ONLY STAY

Product code	101506
Description	Sash locking point



ADJUSTABLE CONCEALED LOCKING

Product code	391017
Description	±1 mm adjustment

RESTRICTOR

Product code	101505
Description	Handle lock keeper



FIXED KEEPER

Product code	191012
Description	with M4 screw

Images are for illustration · please state the product code when ordering

304 CE ift TSE

02 FACADE SYSTEMS

OUTWARD-OPENING AND PARALLEL STAYS

OUTWARD OPENING · FACADE

Outward-opening and parallel-opening stays, restrictors and system hardware for aluminium facades and windows. All products suit Euro-groove profiles.

10"-36"
stay length

225 kg
max. sash

304
stainless

CONTENTS

Outward-opening facade friction stays 41
Stepped restrictor 43
Restrictor stay 44
Facade locking set 45
System hardware equipment 48
Parallel facade stays 50

OUTWARD OPENING · FACADE FRICTION STAY

SMALL STAYS

10"-16"

254–406 mm · 4 sizes · 50–85 kg

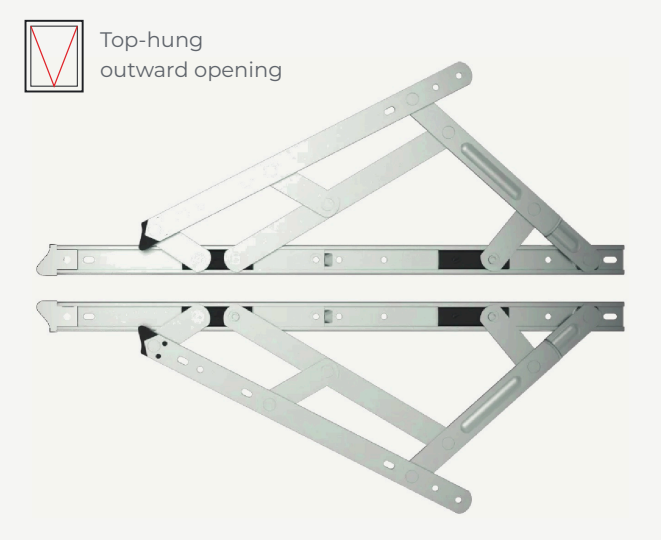

PRODUCT

right + left pair · 4 sizes

Bossy facade friction stays are concealed stays that let the window open outward. Friction is adjusted by hand, so the sash holds at any chosen angle. Suitable for European-standard facade profiles.

- Concealed fitting, invisible when the sash is closed
- Manually adjustable friction brake
- 304 stainless steel body
- Suits facade profiles with 23 × 16 mm Euro groove

50-85 kg	25°-35°	700-1200 mm	1200-1400 mm
Max. sash weight	Max. opening angle	Max. sash height	Max. sash width

TECHNICAL PARAMETERS

4 sizes

Size	Opening angle	Max. sash height H (mm)	Max. sash width W (mm)	Max. sash weight (kg)
10" 254 mm	30°	700	1200	**50**
12" 305 mm	30° / 35°	800	1200	**60**
14" 356 mm	30° / 35°	1000	1300	**70**
16" 406 mm	25° / 30°	1200	1400	**85**

SELECTION AND APPLICATION

top-hung sash

Stay selection · max. sash height and weight

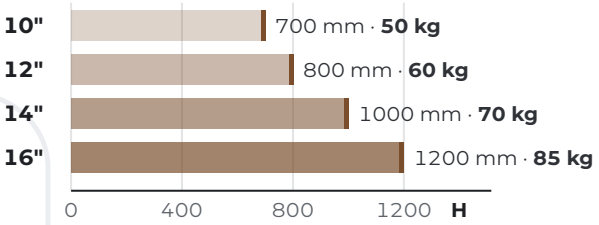



- Choose the stay length by sash height; the weights and dimensions in the table must not be exceeded.
- Each sash takes 1 pair (2 pcs): one right and one left.
- α: opening angle, 25°–35° depending on stay length.

Dimensions in mm · stays are supplied as right + left pairs

304 | CE | ift | TSE

OUTWARD OPENING · FACADE FRICTION STAY

LARGE STAYS

18"-28"

457–711 mm · 7 sizes · 100–185 kg

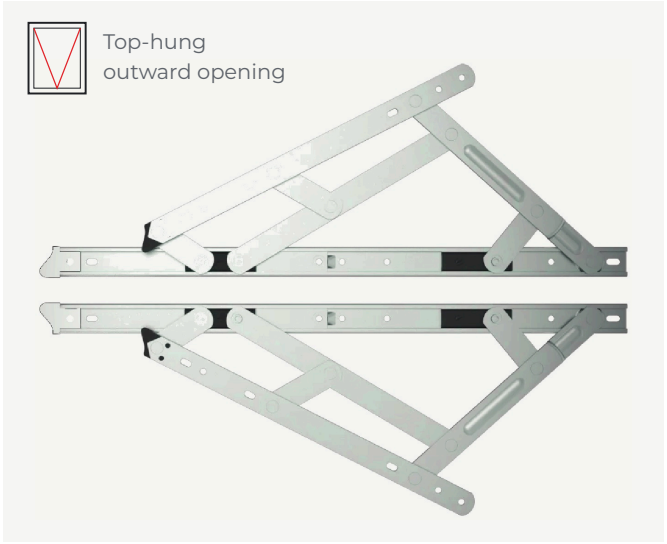

PRODUCT

right + left pair · 7 sizes

Outward-opening facade friction stay for large, heavy sashes. Friction is adjusted by hand, so the sash holds at any chosen angle.

- Concealed fitting, invisible when the sash is closed
- Multi-arm, reinforced construction
- All-metal, 304 stainless steel
- Suits facade profiles with 23 × 16 mm Euro groove

100-185 kg	20°-30°	1400-2000 mm	1500 mm
Max. sash weight	Max. opening angle	Max. sash height	Max. sash width

TECHNICAL PARAMETERS

7 sizes

Size	Opening angle	Maks. H (mm)	Maks. W (mm)	Max. weight (kg)
18" 457 mm	25° / 30°	1400	1500	**100**
20" 508 mm	20° / 25°	1600	1500	**130**
22" 559 mm	20° / 25°	1700	1500	**135**
24" 610 mm	20° / 25°	1800	1500	**140**
28" 711 mm	20°	2000	1500	**155**
24" 610 mm HEAVY DUTY	20° / 25°	1800	1500	**155**
28" 711 mm HEAVY DUTY	20°	2500	1500	**185**

SELECTION AND APPLICATION

top-hung sash

Stay selection · max. sash height and weight

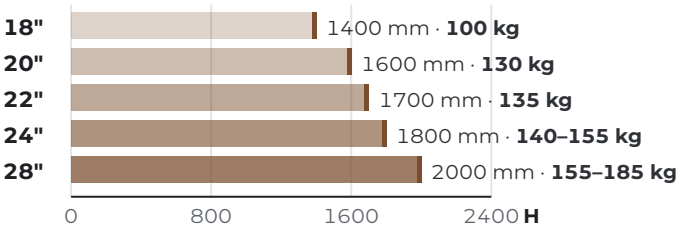



- Choose the stay length by sash height; the weights and dimensions in the table must not be exceeded.
- Each sash takes 1 pair (2 pcs): one right and one left.
- α: opening angle, 20°–30° depending on stay length.

Dimensions in mm · stays are supplied as right + left pairs

304 CE ift TSE

RESTRICTOR · STEPPED

STEPPED RESTRICTOR

3 · 5 steps
telescopic stay

The stepped body is optimised to fit more window types and profiles. The high-strength, retractable telescopic design holds the sash in 3 or 5 positions. Complies with European standards.

3 / 5	43 mm
Steps	Body height

3-STEP RESTRICTOR

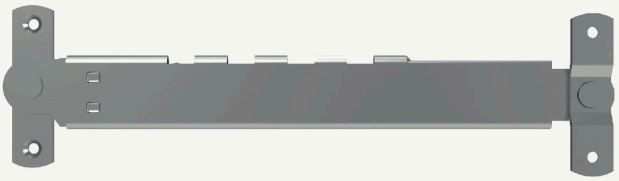

Closed length	**178 mm**
Open length	**274 mm**
Steps	**3**

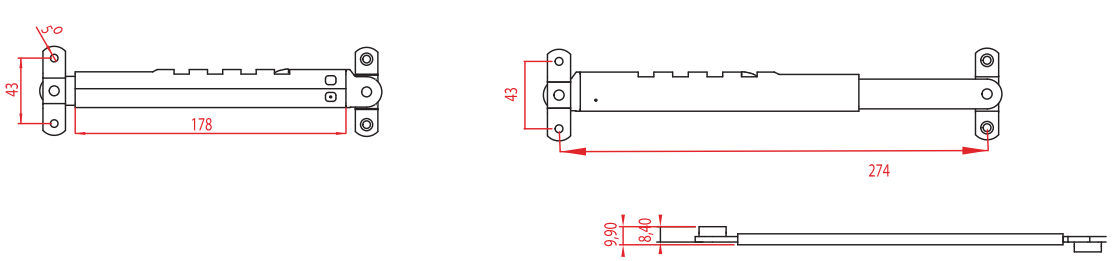

5-STEP RESTRICTOR

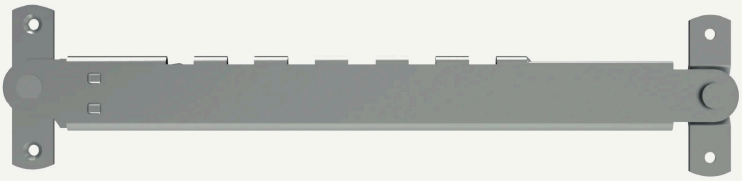

Closed length	**250 mm**
Open length	**360 mm**
Steps	**5**

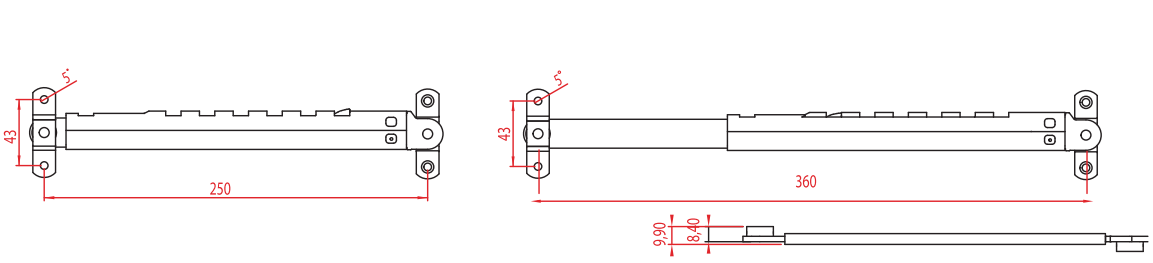

Dimensions in mm · suits European-standard profiles

304 | CE | ift | TSE

RESTRICTOR · STAY

RESTRICTOR STAY

1600 · 2200
max. sash height, mm

Limits the opening angle of the sash. Prevents the sash from slamming shut and the glass from breaking in strong wind.

- Limits the opening angle
- Protection against slamming in wind
- Used together with outward-opening facade friction stays

1600 mm
Max. sash height

2500 mm
Max. sash height

FITTING DIMENSIONS

mm

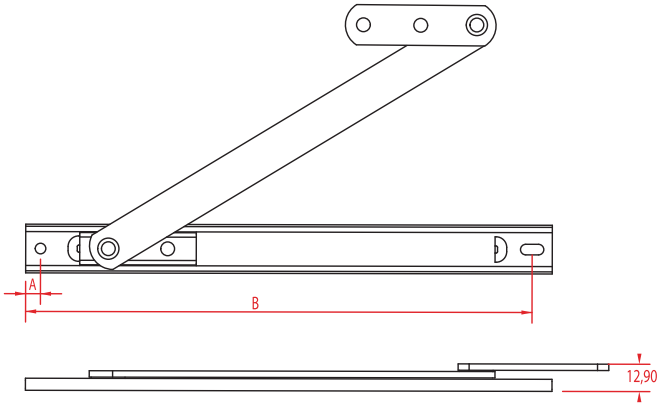

Size	A	B	Maks. H
1600	7	239	1600
2500	7	239	2200

The size indicates the maximum sash height (mm) it can be used for.

Dimensions in mm

304 CE ift TSE

FACADE SYSTEMS · LOCKING SET

FACADE LOCKING SET

ASSEMBLY DIAGRAM

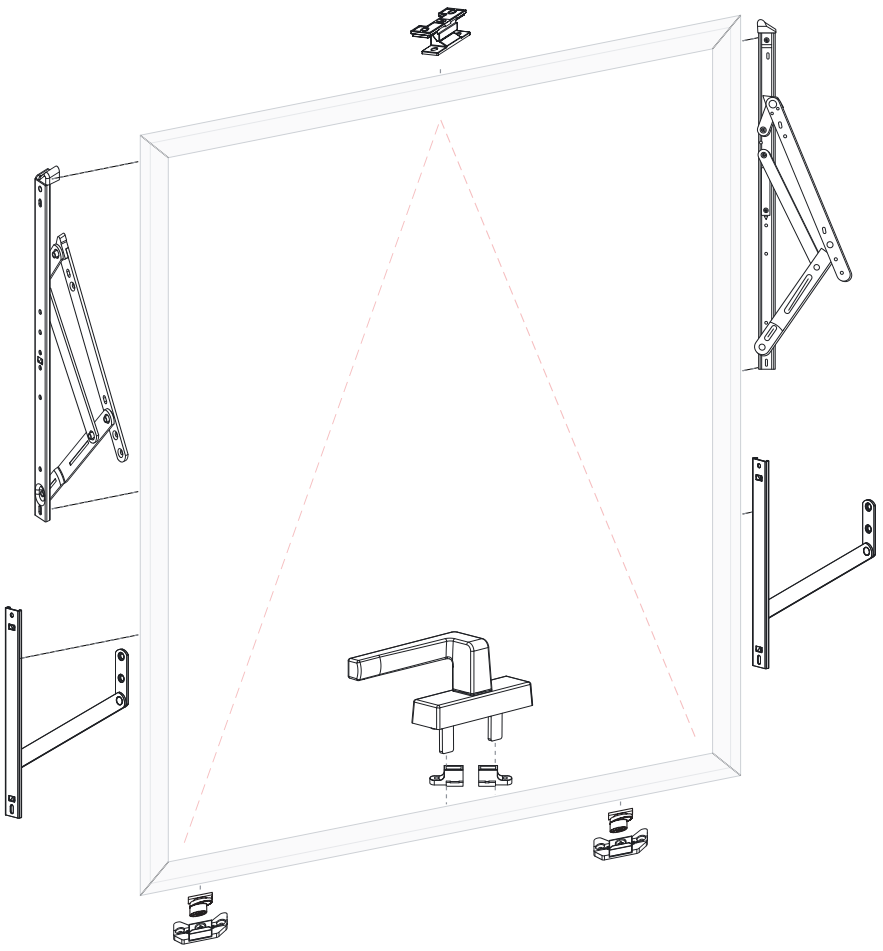

PROFILE SECTION



304 CE ift TSE

FACADE SYSTEMS · LOCKING SET

FACADE LOCKING SET

ASSEMBLY DIAGRAM

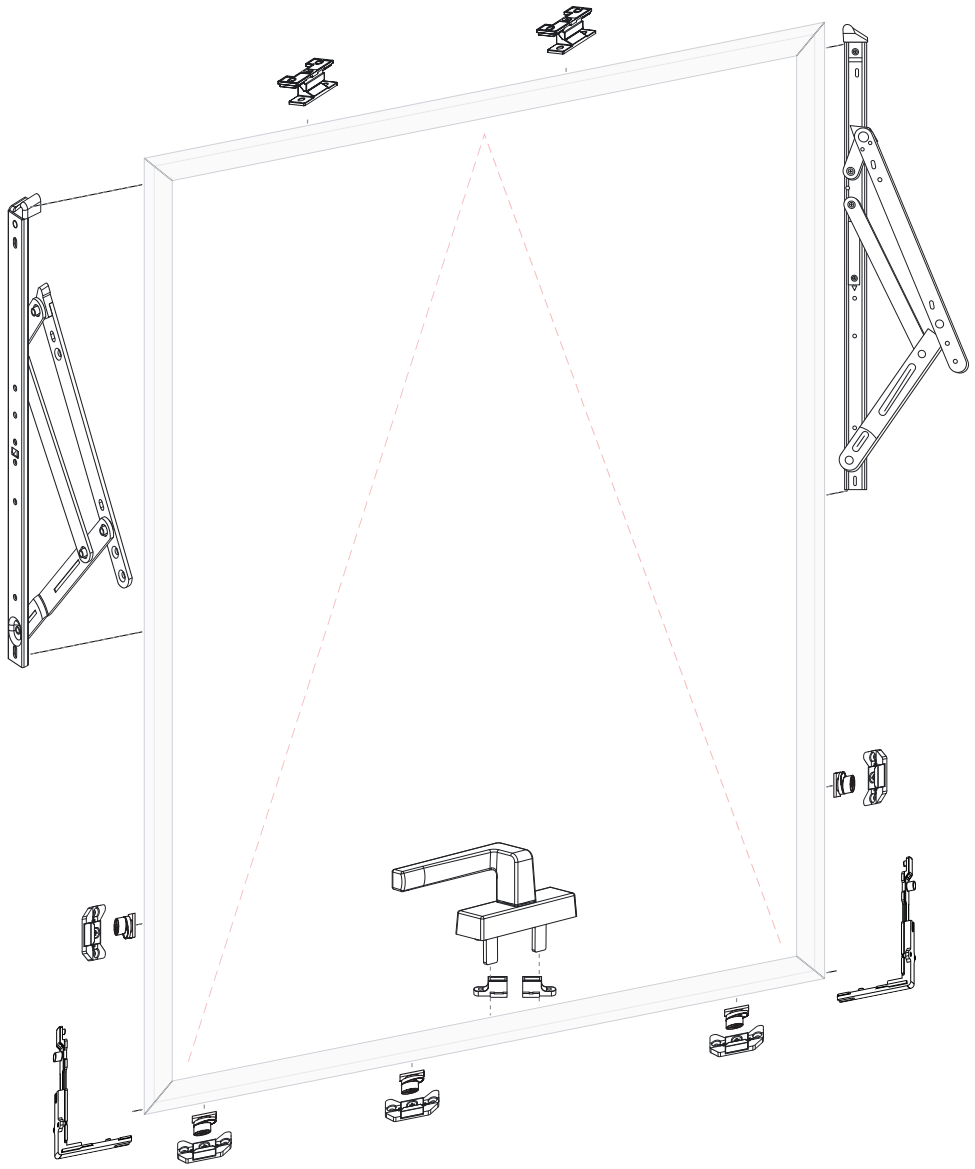

PROFILE SECTION



304 CE ift TSE

FACADE SYSTEMS · LOCKING SET

FACADE LOCKING SET

ASSEMBLY DIAGRAM

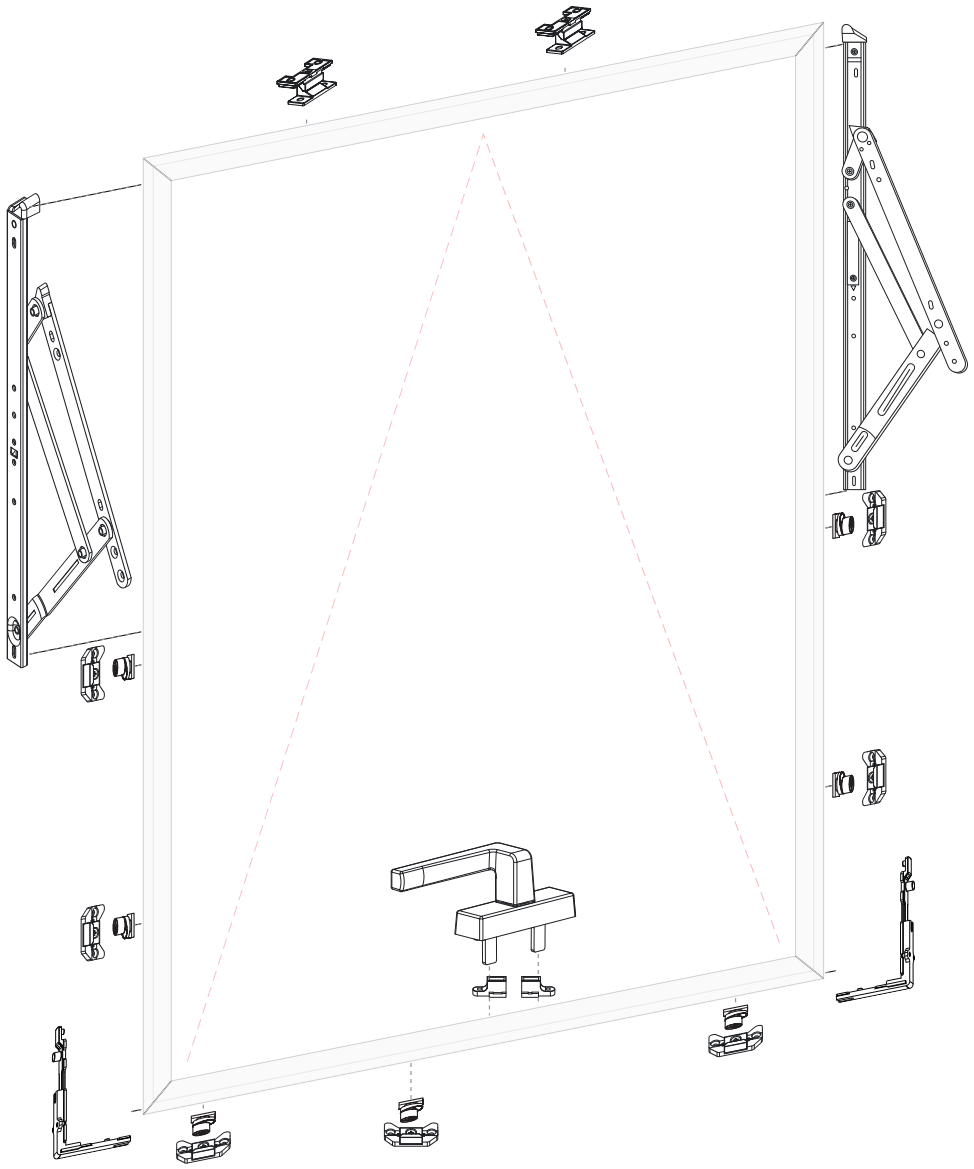

PROFILE SECTION



304 | CE | ift | TSE

FACADE FRICTION STAY · SYSTEM HARDWARE

SYSTEM HARDWARE ACCESSORIES



01
Adjustable facade keeper
A screw adjustment sets the sash-to-frame compression precisely.

02
Shoe
Connects the facade sash handle drive piece to the bottom rail.



03
Facade fixed keeper
Non-adjustable fixed keeper; holds the sash in the closed position.

04
Corner drive
Transfers the locking movement around the corner to the next edge.

05
Facade pin group keeper
Frame-side keeper set for the locking pins



06
Steel facade safety cable
Stainless steel safety cable connecting sash to frame; prevents the sash from falling if a stay fails.

07
Facade concealed pressure block
Used between frame and sash on the top rail to press the sash against the gasket.

08
Stay metric adjustment piece
'Z' adjustment piece recommended for facade sashes over 100 kg

09
Base-mounted adjustable hook pin
Mushroom-head pin · Allen-adjustable

10
Base-mounted adjustable pin
Flat-head pin · Allen-adjustable

For use with outward-opening facade friction stays · material: 304 stainless steel

304 CE ift TSE

PARALLEL OPENING · FACADE STAY

PARALLEL STAY

14" - 18"

single stay · 55–110 kg

Parallel opening

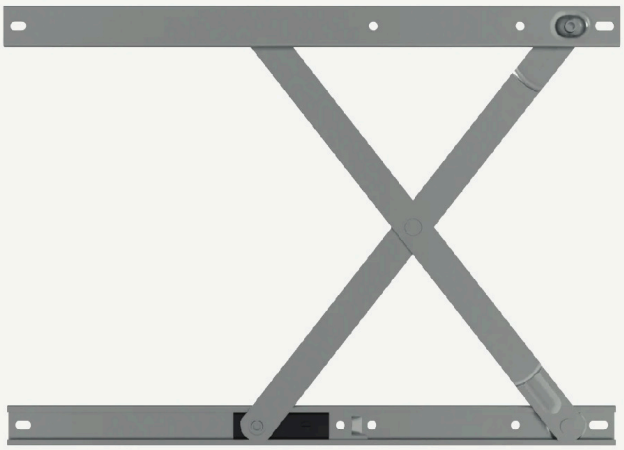

PRODUCT

single stay · 2 sizes

A parallel-opening window lets air flow around the entire sash perimeter for maximum natural ventilation. The sash moves out parallel to the facade, keeping the facade appearance intact.

- Even airflow on all four sides of the sash
- Clean sight lines on modern facades
- 23 mm installation height between sash and frame
- All-metal, 304 stainless steel

55-110 kg	115-219 mm	700-1000 mm	1000-1800 mm
Max. sash weight	Opening distance	Max. sash height	Max. sash width

TECHNICAL PARAMETERS

2 sizes

Size	Opening (mm)	Maks. H (mm)	Maks. W (mm)	Max. weight (kg)
14" 356 mm	115 / 205	700	1800	**110**
18" 457 mm	174–219	1000	1000	**55**

SELECTION AND APPLICATION

parallel-opening sash

Stay selection · max. sash height and weight

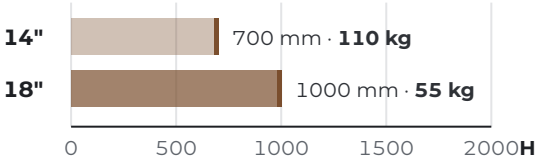



- Choose the stay length by sash height; the weights and dimensions in the table must not be exceeded.
- The sash is pushed outward parallel to the frame.

Dimensions in mm

304 | CE | ift | TSE

PARALLEL OPENING · FACADE STAY

PARALLEL STAY

27" · 36"

double stay · 225 kg

Parallel opening

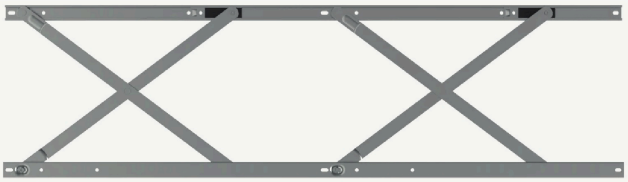

PRODUCT

double stay · 2 sizes

The double-stay parallel system is designed for large, heavy sashes. The stays are fitted between two flat, parallel rigid surfaces; sash and frame legs must stay within the maximum dimensions in the table.

- 225 kg capacity on large sashes
- Two stays in one body, balanced opening
- Follow the table dimensions during installation
- All-metal, 304 stainless steel

225 kg	115/205 mm	1400-1800 mm	1800 mm
Max. sash weight	Opening distance	Max. sash height	Max. sash width

TECHNICAL PARAMETERS

2 sizes

Size	Opening (mm)	Maks. H (mm)	Maks. W (mm)	Max. weight (kg)
27" 686 mm	115 / 205	1400	1800	**225**
36" 914 mm	115 / 205	1800	1800	**225**

SELECTION AND APPLICATION

parallel-opening sash

Stay selection · max. sash height and weight

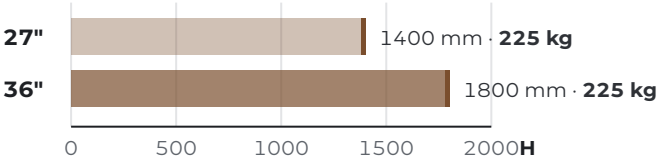



- Choose the stay length by sash height; the weights and dimensions in the table must not be exceeded.
- The sash is pushed outward parallel to the frame.

Dimensions in mm

304 CE ift TSE

PARALLEL OPENING · SELECTION CHART

STAY SELECTION

1 Sash **width** — choose the column; the top stay length is in the column header.

2 Sash **height** — choose the row; the side stay and weight limit are in the row header.

3 The intersecting cell shows the stay layout and the recommended **handle** position.

SELECTION TABLE

dimensions are sash outer dimensions · mm

ROW HEIGHT	SASH WIDTH 400-600 mm TOP STAY 350 mm · 14"	SASH WIDTH 500-970 mm TOP STAY 450 mm · 18"	SASH WIDTH 970-1250 mm TOP STAY 680 mm · 27"	SASH WIDTH 1250-1500 mm TOP STAY 925 mm · 36"
SASH HEIGHT 740-980 mm 450 mm · 18" • 110 kg	 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	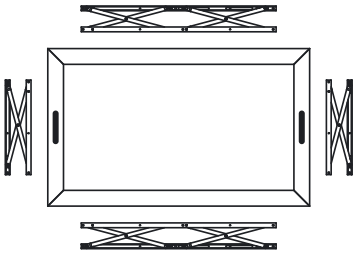 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis
SASH HEIGHT 970-1250 mm 680 mm · 27" • 220 kg	 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	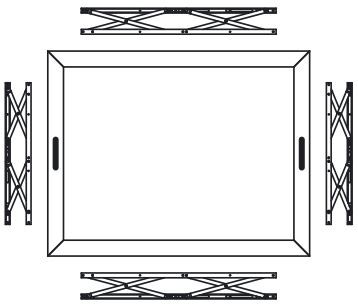 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis

APPLICATION NOTES

01 A restrictor stop plate must be fitted to the stay mechanisms on each side of the system, one per side, to give a maximum opening distance of 150 mm.

02 In multi-stay configurations, all stay mechanisms must be centred in the system and fitted with equal axis spacing between them.

PARALLEL OPENING · SELECTION CHART

STAY SELECTION

SELECTION TABLE

dimensions are sash outer dimensions · mm

ROW HEIGHT	SASH WIDTH 400-600 mm · TOP STAY 350 mm · 14"	SASH WIDTH 500-970 mm · TOP STAY 450 mm · 18"	SASH WIDTH 970-1250 mm · TOP STAY 680 mm · 27"	SASH WIDTH 1250-1500 mm · TOP STAY 925 mm · 36"
SASH HEIGHT 1250-2000 mm · 925 mm · 36" · 220 kg	 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	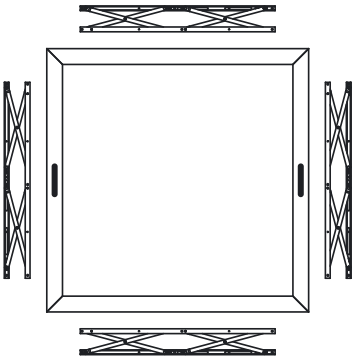 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis
SASH HEIGHT 2000-3000 mm · 2 × 925 mm · 36" · 220 kg	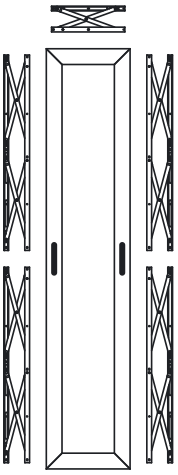 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	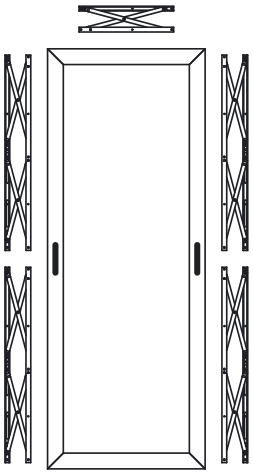 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	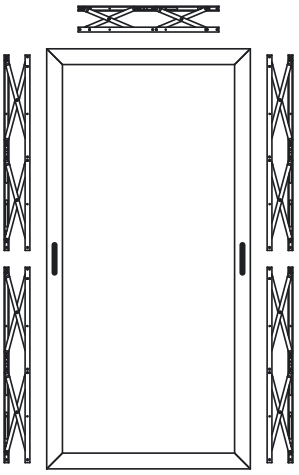 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis	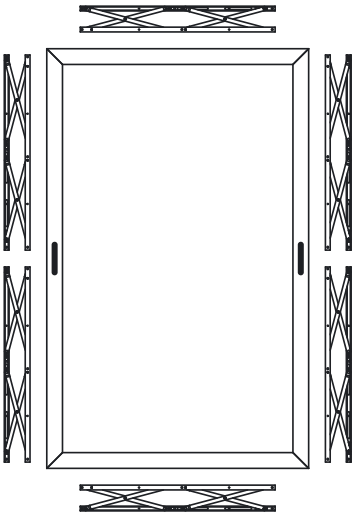 RECOMMENDED Twin handles on the side profiles, centred on the vertical axis

APPLICATION NOTES

03 The stay mechanisms do not seal the sash. The optimum gasket compression required in the system is achieved by the locking mechanisms.

IMPORTANT
Integration of parallel-opening stays into the system and their installation suitability must be verified against the DWG data of the relevant aluminium profile sections.

PARALLEL OPENING · FACADE STAY

PARALLEL STAY

450 mm · 18"

TECHNICAL DRAWING

dimensions in mm

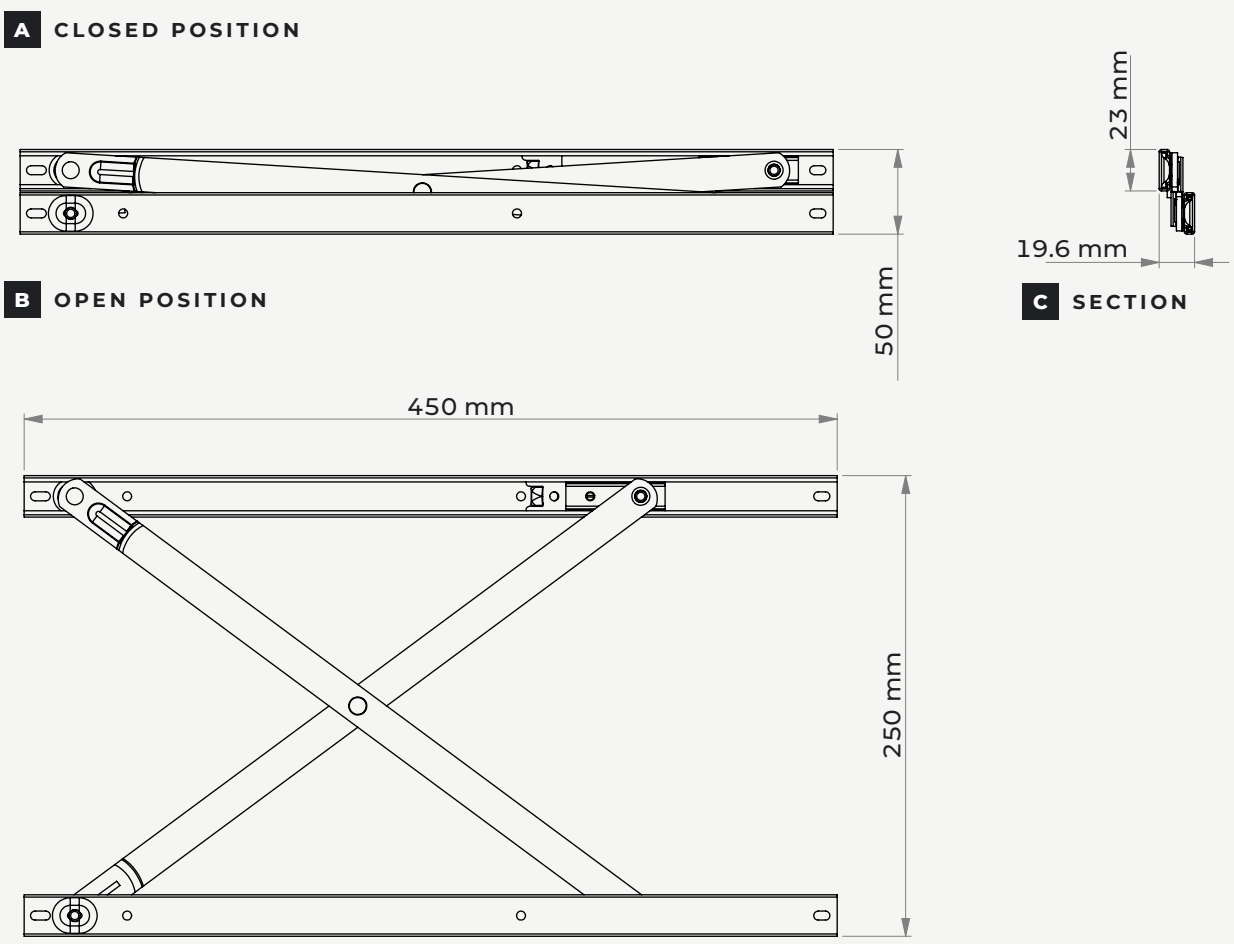

450 mm	50 mm	250 mm
Stay length · 18"	Closed height (min.)	Opening (max.)

TECHNICAL PARAMETERS

1 size

Size	Closed (mm)	Open max. (mm)	Section (mm)
450 mm · 18"	50	250	19.6 × 23

The single-stay parallel system pushes medium-sized facade sashes outward parallel to the frame. Closed, it folds to 50 mm high; open, it gives 250 mm between sash and frame.

- Closed 50 mm, open 250 mm
- Slim 19.6 × 23 mm profile section

Dimensions in mm

304 CE ift TSE

PARALLEL OPENING · FACADE STAY

PARALLEL STAY

36" 925 mm

TECHNICAL DRAWING

dimensions in mm

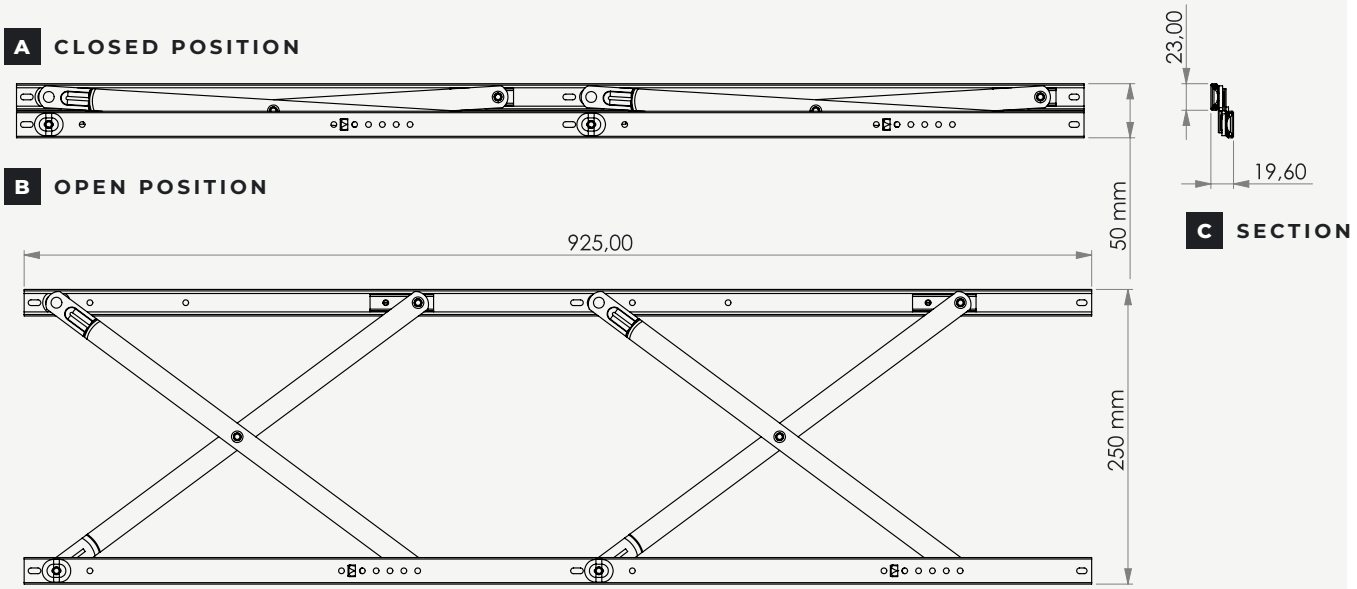

925 mm	50 mm	250 mm
Stay length	Closed height (min.)	Opening (max.)

TECHNICAL PARAMETERS

1 size

Size	Closed (mm)	Open max. (mm)	Section (mm)
925 mm	50	250	19.6 × 23

The double-stay parallel system pushes wide facade sashes outward parallel to the frame. Two stays in one body carry the sash evenly; closed, it folds to 50 mm high; open, it gives 250 mm clearance.

- Two stays in one body, balanced opening
- Closed 50 mm, open 250 mm
- Slim 19.6 × 23 mm profile section

Dimensions in mm

304 CE ift TSE

PARALLEL OPENING · FACADE STAY

PARALLEL STAY

27" 680 mm

TECHNICAL DRAWING

dimensions in mm

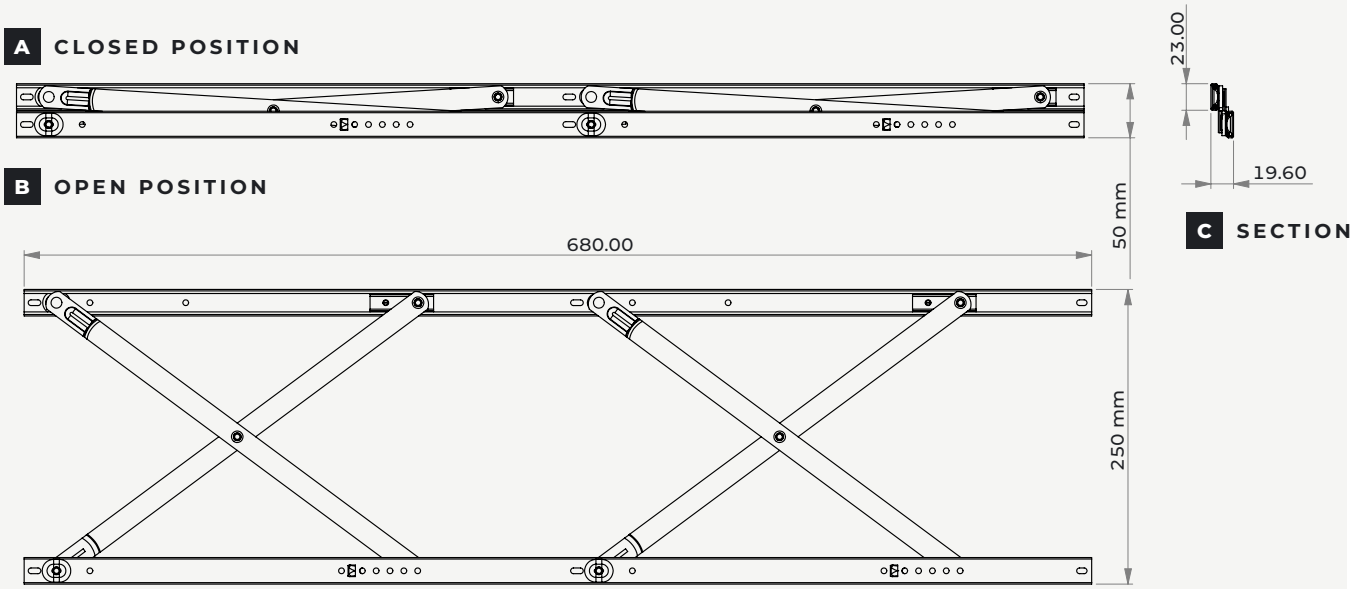

680 mm
Stay length · 27"

50 mm
Closed height (min.)

250 mm
Opening (max.)

TECHNICAL PARAMETERS

1 size

Size	Closed (mm)	Open max. (mm)	Section (mm)
680 mm · 27"	50	250	19.6 × 23

The double-stay parallel system pushes wide facade sashes outward parallel to the frame. Two stays in one body carry the sash evenly; closed, it folds to 50 mm high; open, it gives 250 mm clearance.

- Closed 50 mm, open 250 mm
- Slim 19.6 × 23 mm profile section

Dimensions in mm

304 CE ift TSE

PARALLEL OPENING · FACADE STAY

PARALLEL STAY

350 mm · 14"

TECHNICAL DRAWING

dimensions in mm

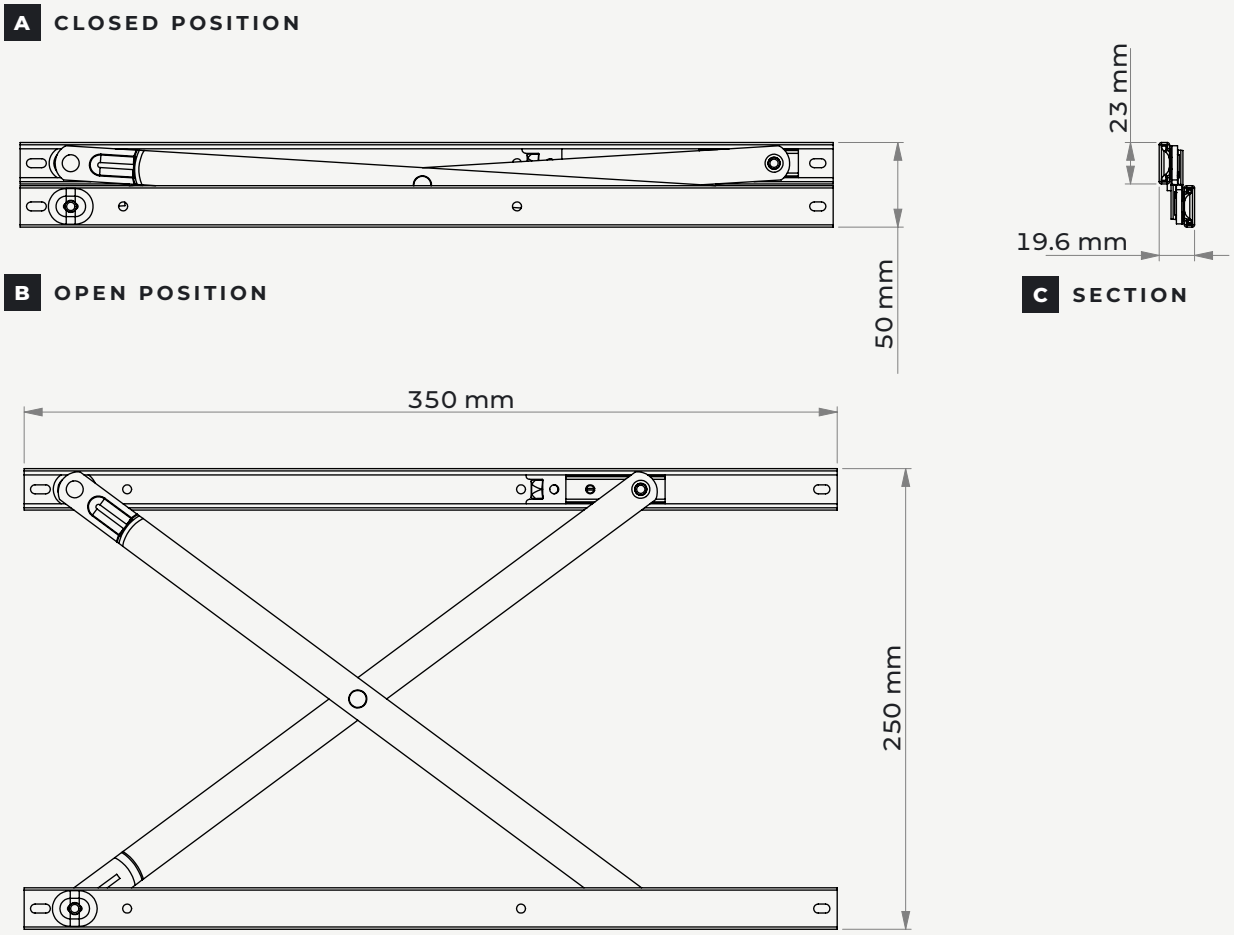

350 mm	50 mm	250 mm
Stay length · 14"	Closed height (min.)	Opening (max.)

TECHNICAL PARAMETERS

1 size

Size	Closed (mm)	Open max. (mm)	Section (mm)
350 mm · 14"	50	250	19.6 × 23

The single-stay parallel system pushes medium-sized facade sashes outward parallel to the frame. Closed, it folds to 50 mm high; open, it gives 250 mm between sash and frame.

- Closed 50 mm, open 250 mm
- Slim 19.6 × 23 mm profile section

Dimensions in mm

304 CE ift TSE

PARALLEL OPENING · FULLY CLOSING

PARALLEL STAY

14" · 18"
fully closing

14" · 350 MM

technical drawing

14" 350 mm

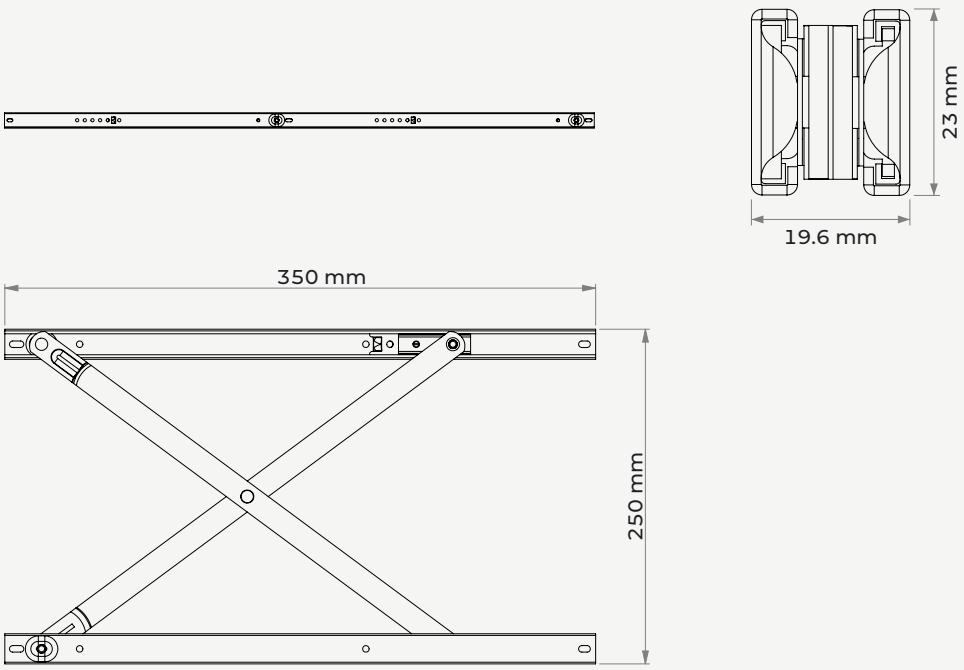

18" · 450 MM

technical drawing

18" 450 mm

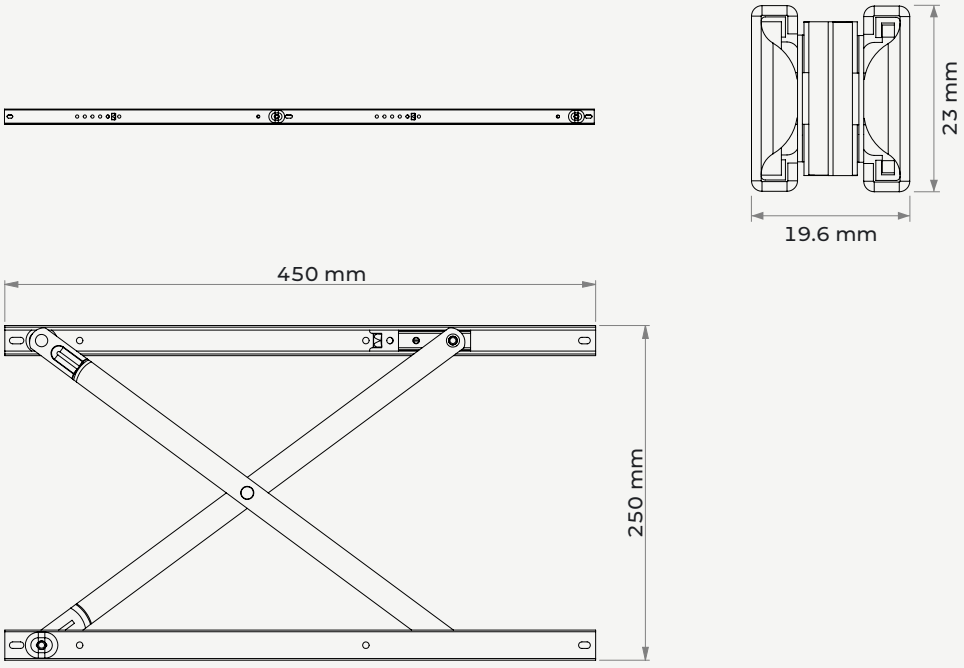

Dimensions in mm

304 | CE | ift | TSE

PARALLEL OPENING · FULLY CLOSING

PARALLEL STAY

27" · 36"
fully closing

27" · 680 MM

technical drawing

27" 680 mm

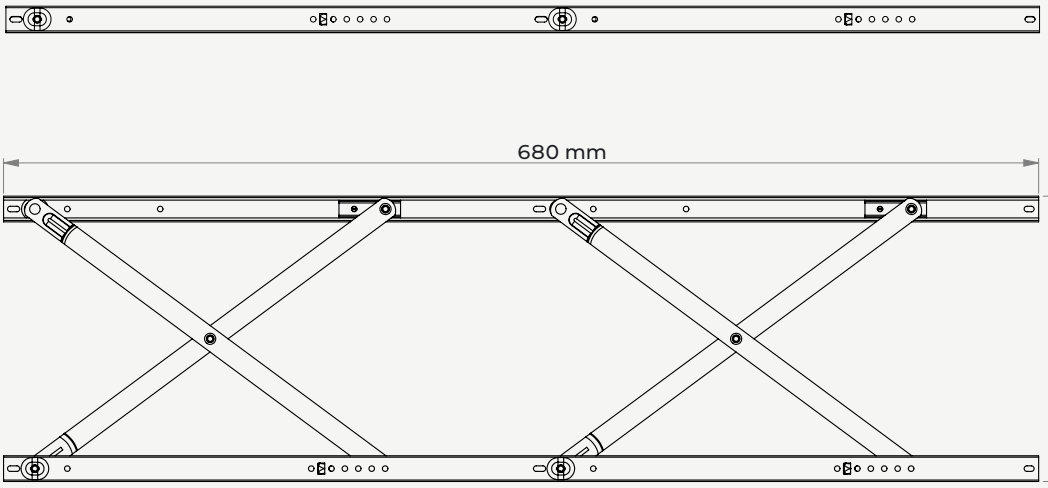

36" · 925 MM

technical drawing

36" 925 mm

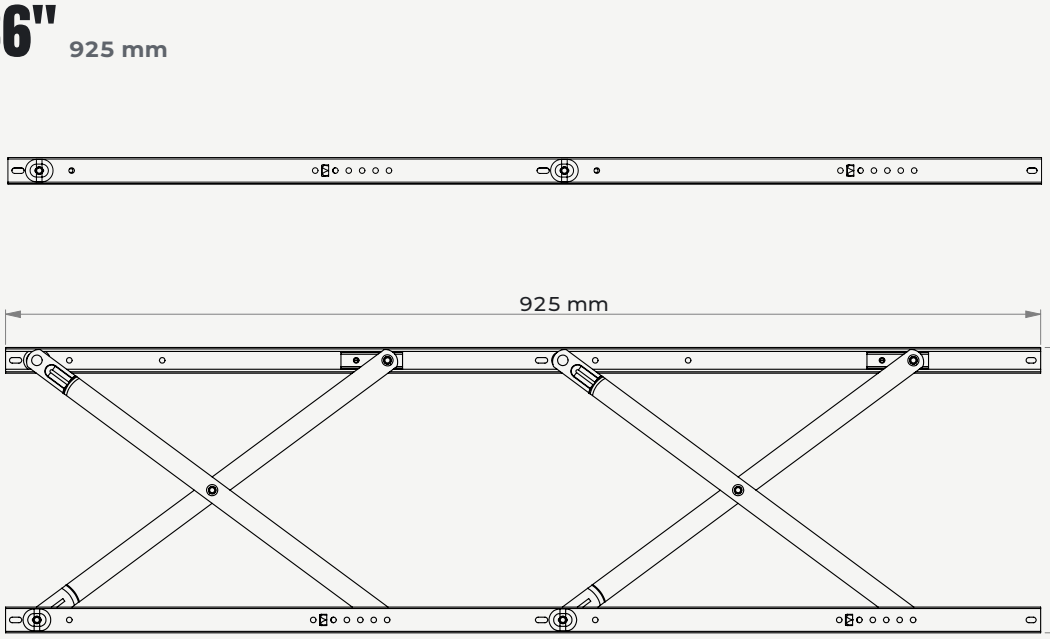

Dimensions in mm

304 | CE | ift | TSE

FACADE SYSTEMS · PARALLEL STAY SET

PARALLEL STAY LOCKING SET

ASSEMBLY DIAGRAM

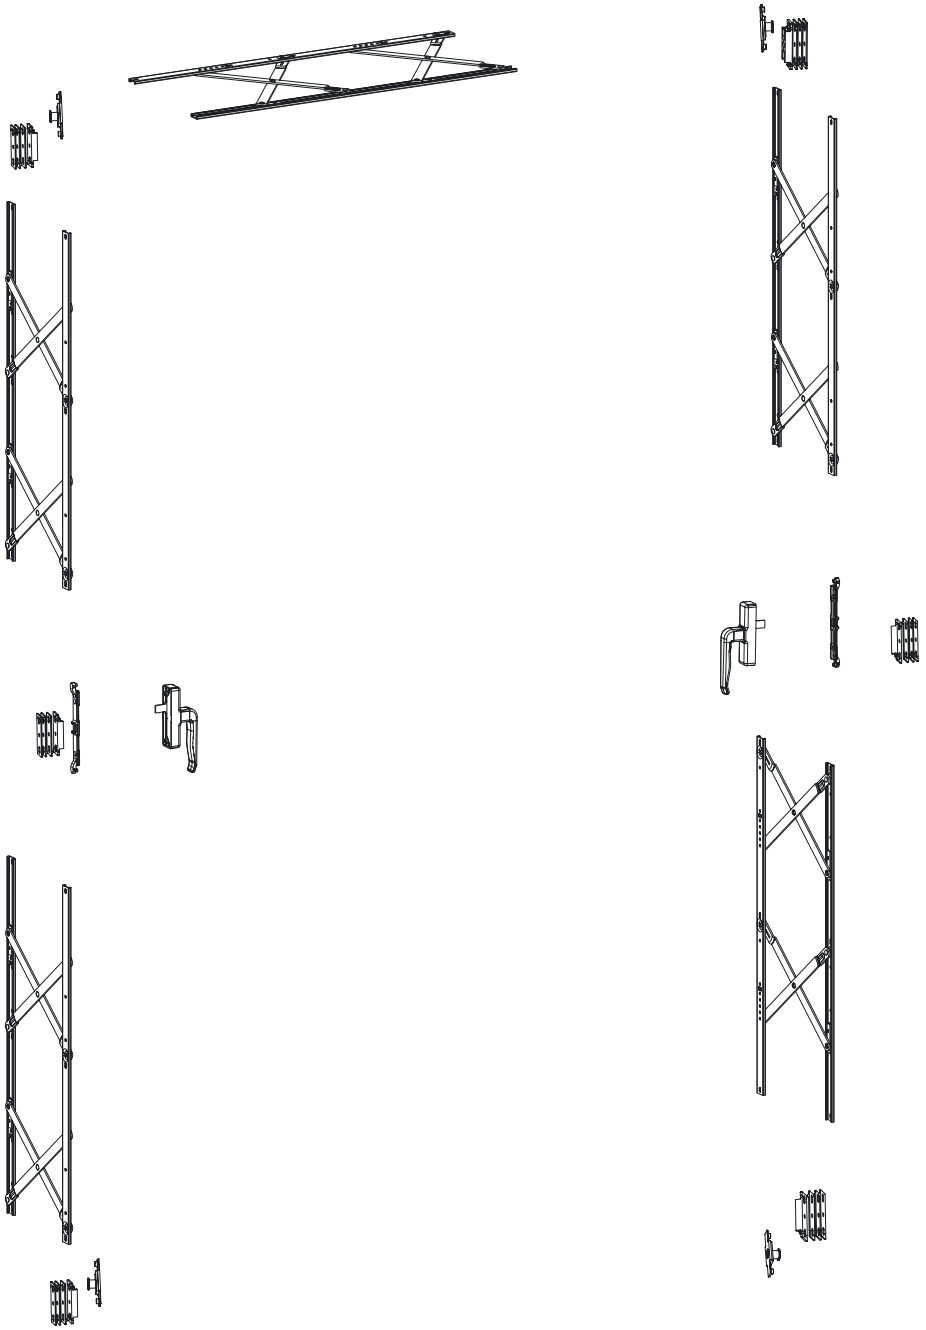

304 CE ift TSE

FACADE SYSTEMS · PARALLEL STAY SET

PARALLEL STAY PERIMETER LOCKING SET

ASSEMBLY DIAGRAM

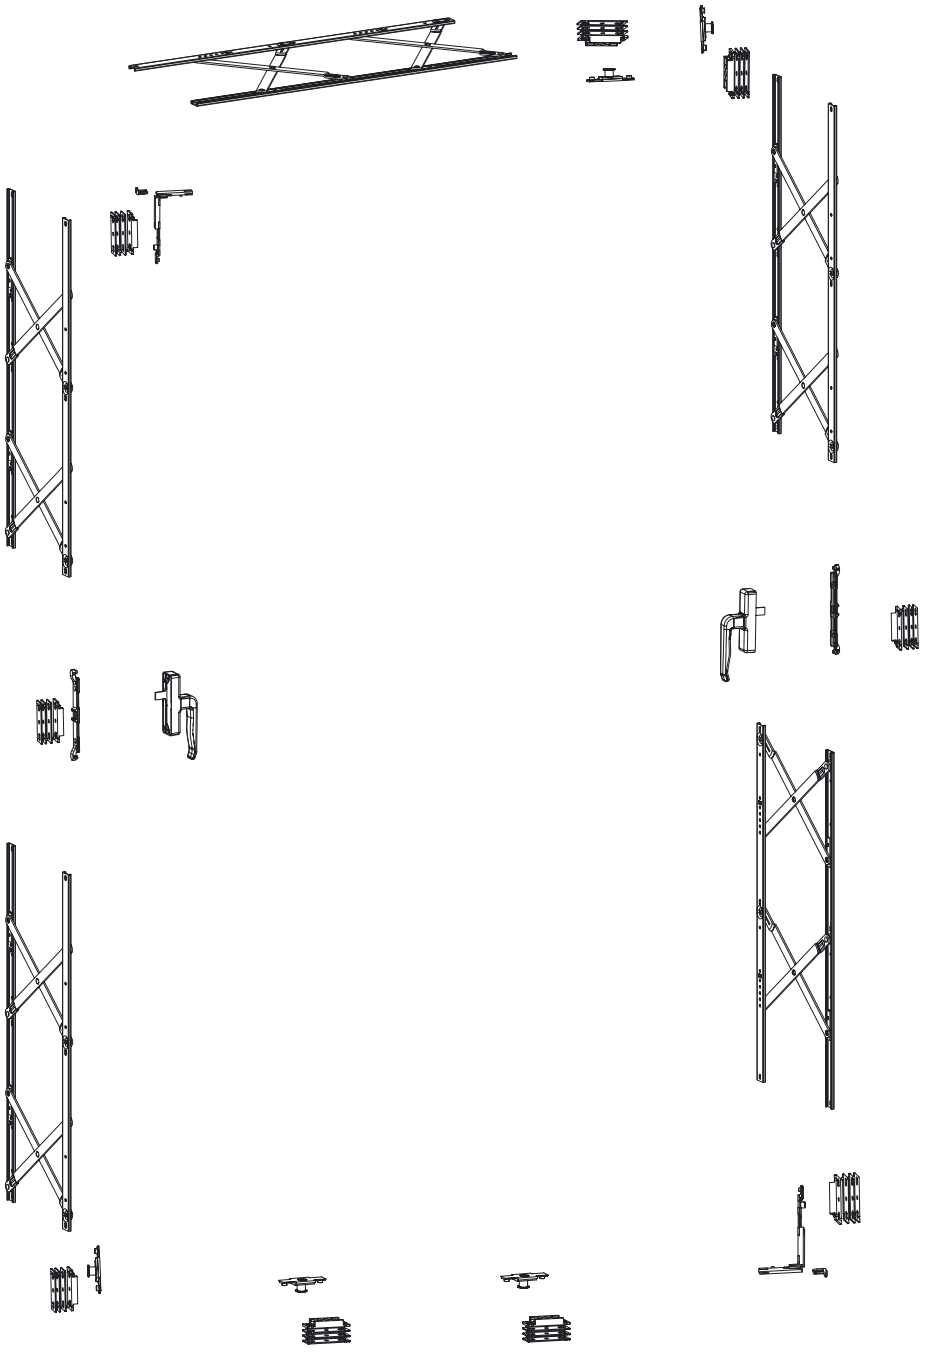

304 CE ift TSE

03 HINGES

DOOR AND WINDOW HINGES

3-way adjustable hinges for aluminium doors and windows. Stainless steel pin, body compatible with Euro-groove profiles.

3D
adjustment

160 kg
door · 3 pcs

304
stainless pin

CONTENTS

Fortis door hinge 63
Tenax door hinge 64
Validus window hinge 65
Fortis window hinge 67

DOOR HINGE

FORTIS DOOR

150 kg

with 3 hinges · 120 kg with 2 hinges

DIMENSIONS mm

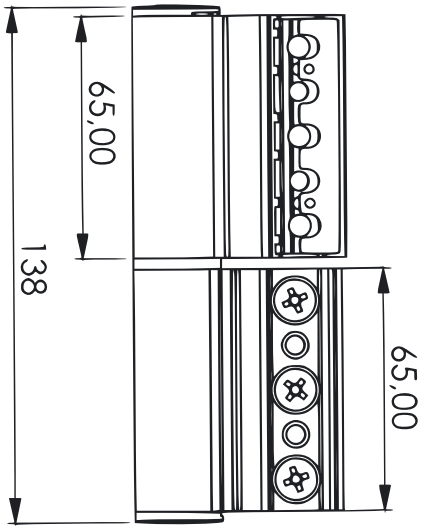

ADJUSTMENT DIRECTIONS



PROFILE

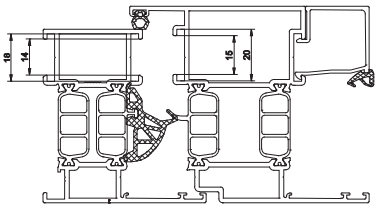

120 kg	**150** kg	**±2** mm	**±0.5** mm	**±2** mm
with 2 hinges	with 3 hinges	Lateral adjustment	Compression adj.	Height adjustment

ADJUSTMENT STEPS

Allen key sizes 3 · 6 · 8

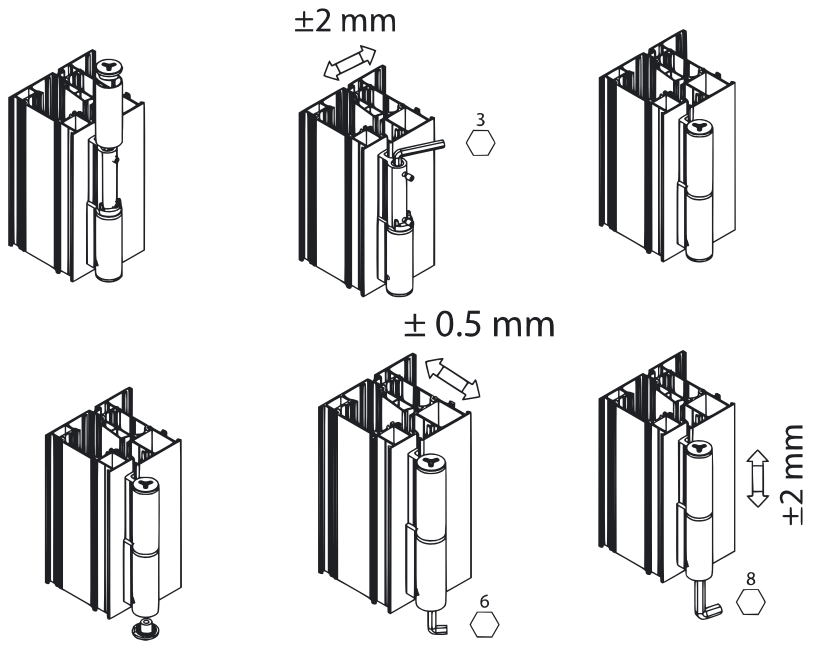

Dimensions in mm · adjust with the leaf hung

304 | CE | ift | TSE

DOOR HINGE

TENAX DOOR

160 kg
with 3 hinges · 120 kg with 2 hinges

ADJUSTMENT

T25 Torx

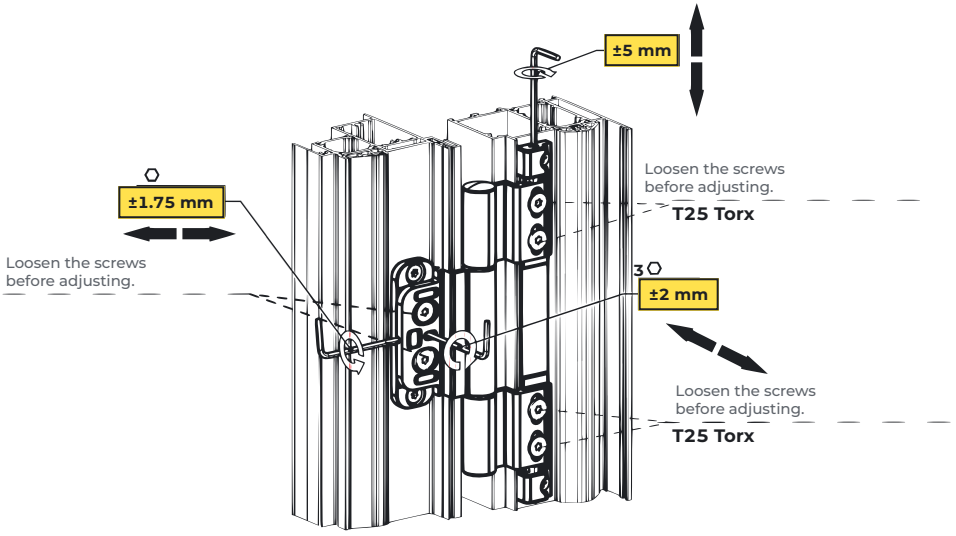

- Loosen the fixing screws before adjusting.

120 kg	160 kg	±1.75 mm	±2 mm	±5 mm
with 2 hinges	with 3 hinges	Lateral adjustment	Compression adj.	Height adjustment

PROFILE AND MILLING DIMENSIONS

mm

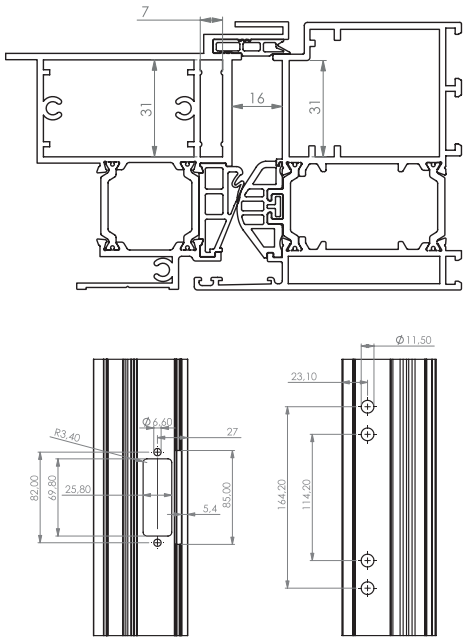

Dimensions in mm · fixing screws M5 × 12

INSTALLATION

M5 × 12 · T25 Torx

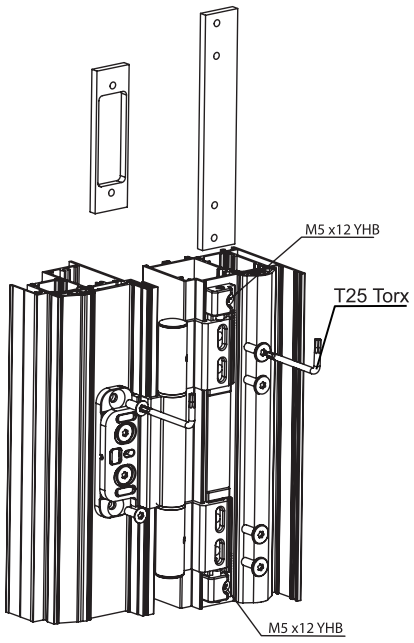

304 | CE | ift | TSE

ADJUSTABLE WINDOW HINGE · 3-KNUCKLE

VALIDUS WINDOW

80 kg
3-knuckle · with 2 hinges

VALIDUS · 3-KNUCKLE

80 kg with 2 hinges

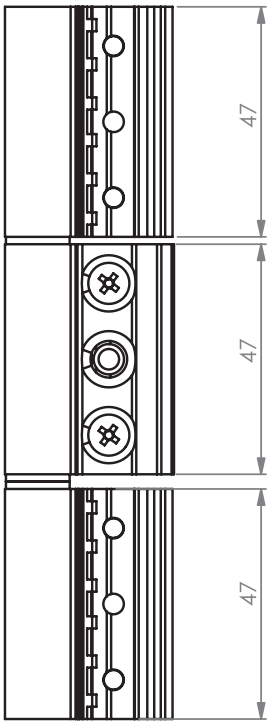

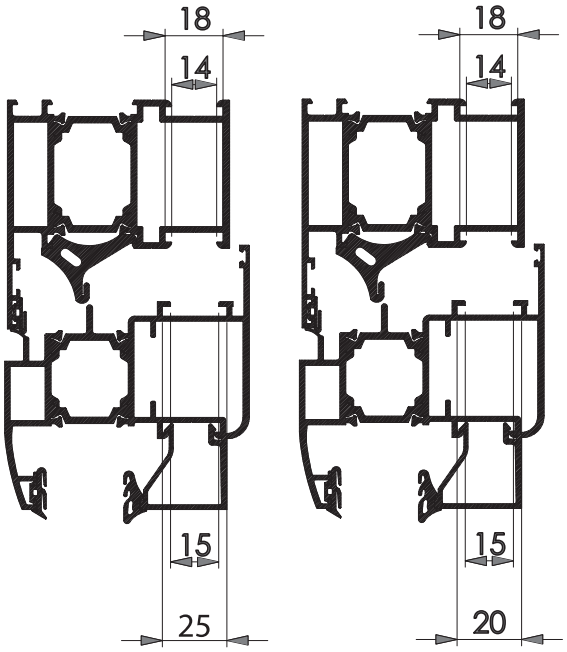

Knuckles	Load	Knuckle length	Pin
3	**80 kg · 2 hinges**	**47 mm**	**304 stainless**

COMPRESSION ADJUSTMENT

9.9 · 11.1 · 12.3 mm

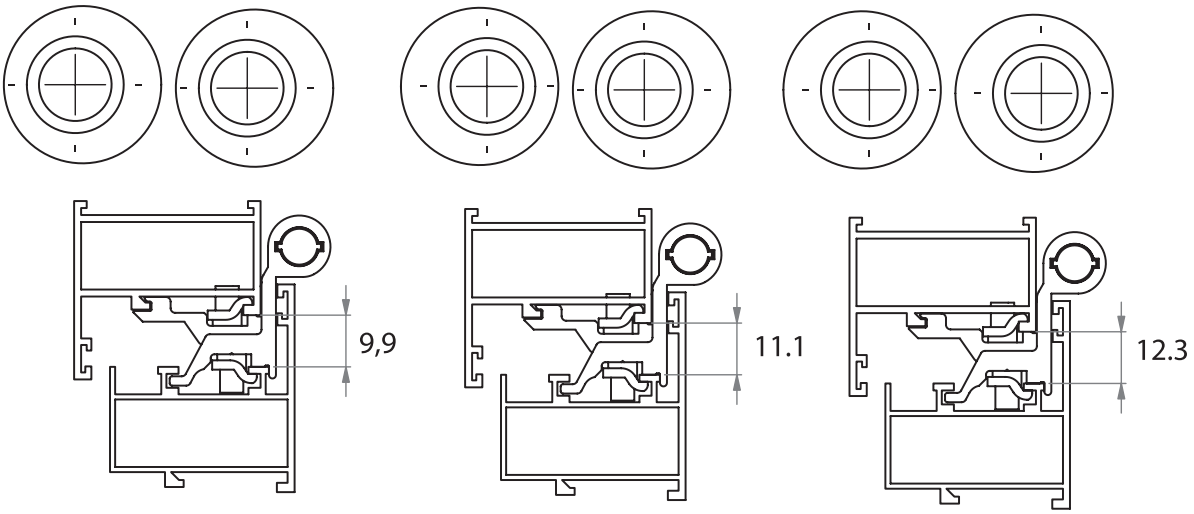

Dimensions in mm · three-step compression via eccentric bushing

304 | CE | ift | TSE

ADJUSTABLE WINDOW HINGE · 2-KNUCKLE

VALIDUS WINDOW

60 kg
2-knuckle · with 2 hinges

VALIDUS · 2-KNUCKLE

60 kg with 2 hinges

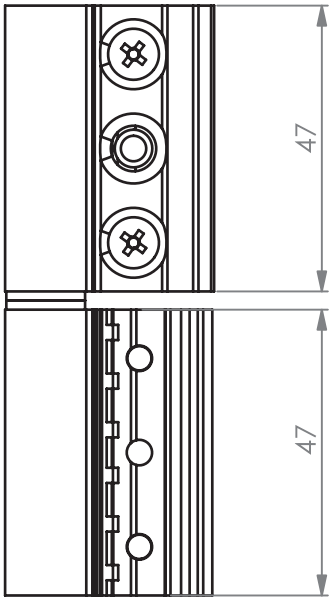

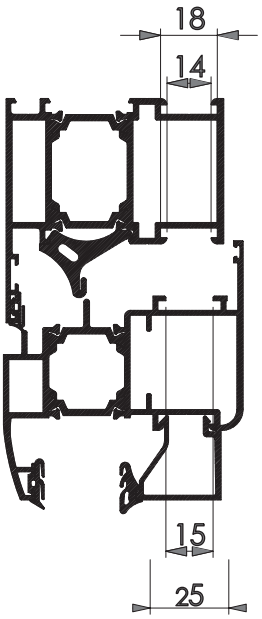

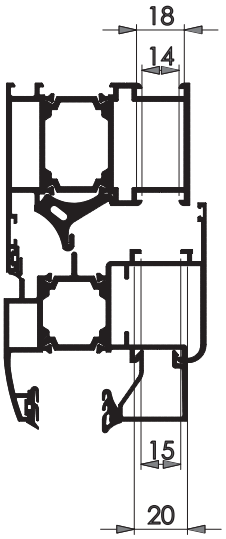

Knuckles	Load	Knuckle length	Pin
2	**60 kg · 2 hinges**	**47 mm**	**304 stainless**

COMPRESSION ADJUSTMENT

9.9 · 11.1 · 12.3 mm

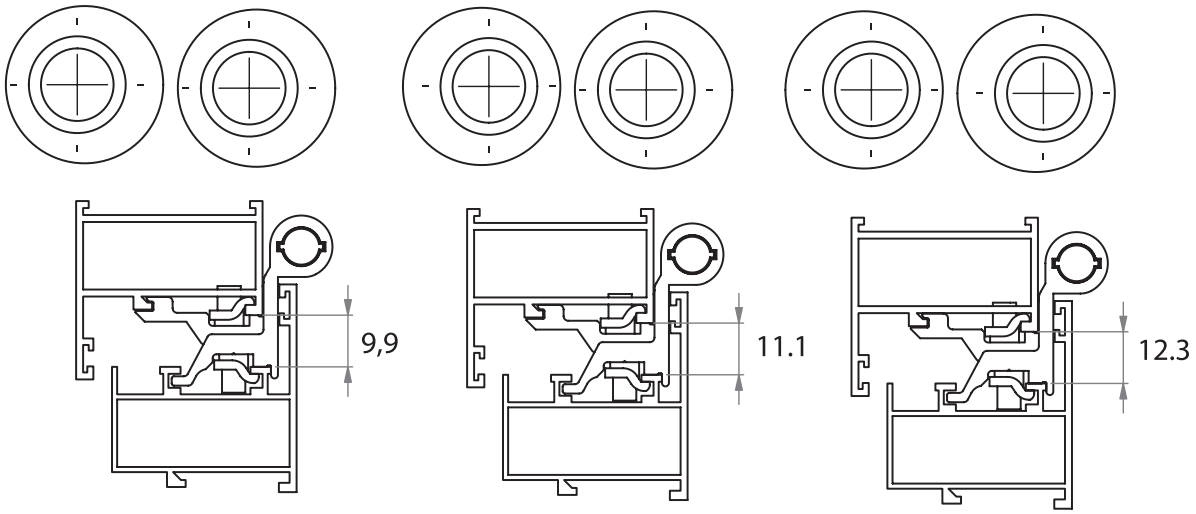

Dimensions in mm · three-step compression via eccentric bushing

304 | CE | ift | TSE

WINDOW HINGE · 3-KNUCKLE

FORTIS WINDOW

100 kg
3-knuckle · with 2 hinges

FORTIS · 3-KNUCKLE

100 kg with 2 hinges

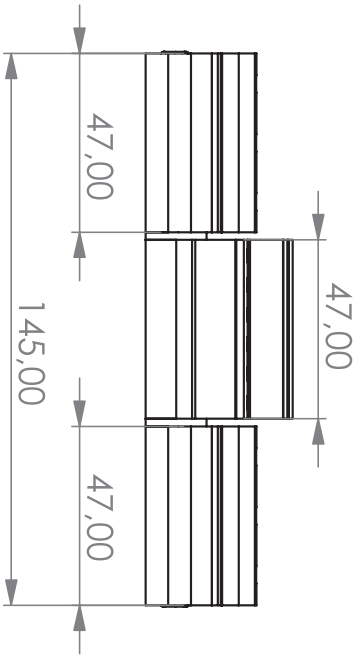



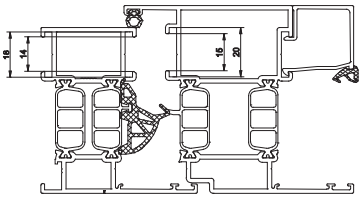

Knuckles	3	Overall length	145 mm	Load	100 kg

Dimensions in mm · stainless steel pin

304 CE ift TSE

WINDOW HINGE · 2-KNUCKLE

FORTIS WINDOW

80 kg

2-knuckle · with 2 hinges

FORTIS · 2-KNUCKLE

80 kg with 2 hinges

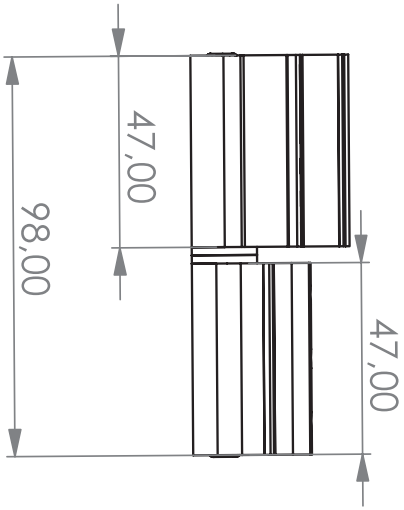



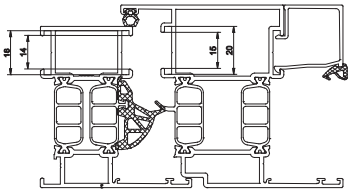

Knuckles	2	Overall length	98 mm	Load	80 kg

Dimensions in mm · stainless steel pin

304 CE ift TSE

04 · HANDLES

04 HANDLES

WINDOW · FACADE · DOOR

Bossy and Novus handle series for window, facade and door applications. Cremone handles are made in window and facade types, with different spindle lengths.

7 handle models

2 series bossy / novus

2 types window / facade

CONTENTS

Bossy articulated han... 71
Novus straight handle 73
Bossy straight handle 75
Bossy curved handle 77
Novus curved handle 79
Novus door handle 81
Bossy Bezault handle 82

FACADE HANDLE · CAPPED FACADE

BOSSY ARTICULATED HANDLE

604 mm
HANDLE LENGTH

CAPPED FACADE

01 / 02

604 mm	40 mm	30 mm
HANDLE LENGTH	CONNECTION	SHOE

TECHNICAL DRAWING

DIMENSIONS · mm

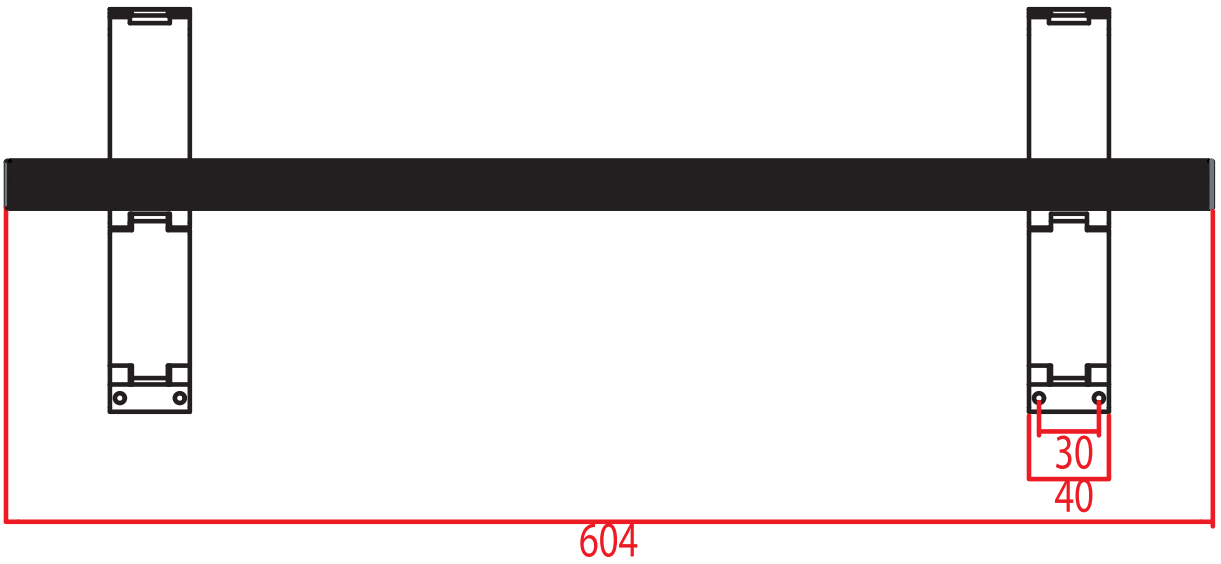

Dimensions in mm · handle length to order

304 | CE | ift | TSE

FACADE HANDLE · SILICONE FACADE

BOSSY ARTICULATED HANDLE

604 mm
HANDLE LENGTH

SILICONE FACADE

02 / 02

604 mm	40 mm	25 mm
HANDLE LENGTH	CONNECTION	SHOE

TECHNICAL DRAWING

DIMENSIONS · mm

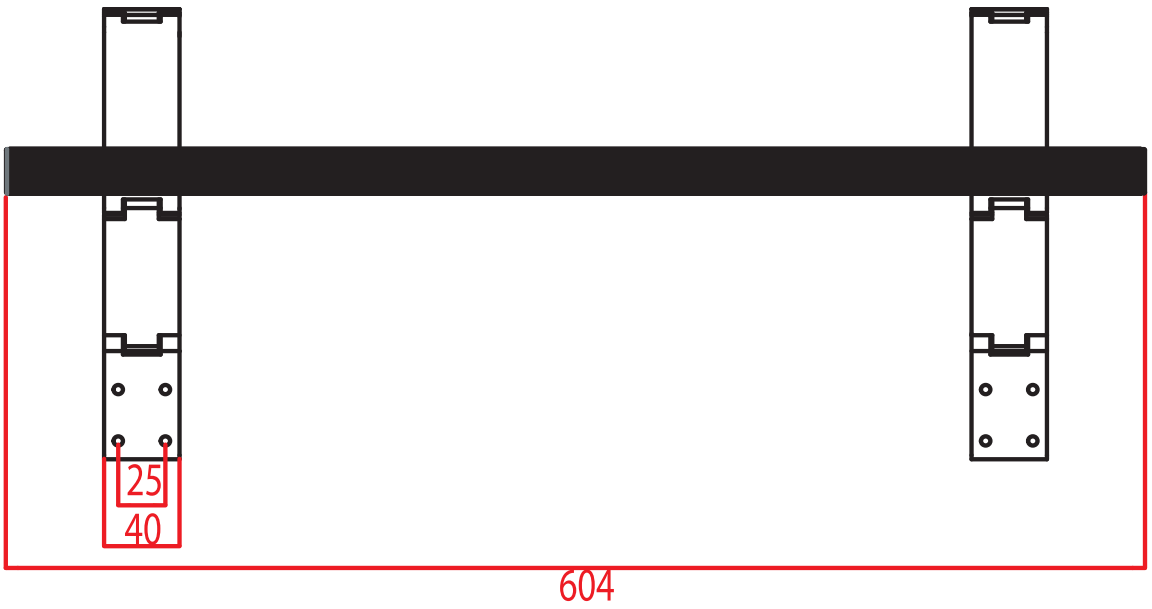

Dimensions in mm · handle length to order

304 CE ift TSE

CREMONE HANDLE · WINDOW

NOVUS STRAIGHT HANDLE

115.5 mm
BODY LENGTH

WINDOW

A / B

TECHNICAL DRAWING

DIMENSIONS · mm

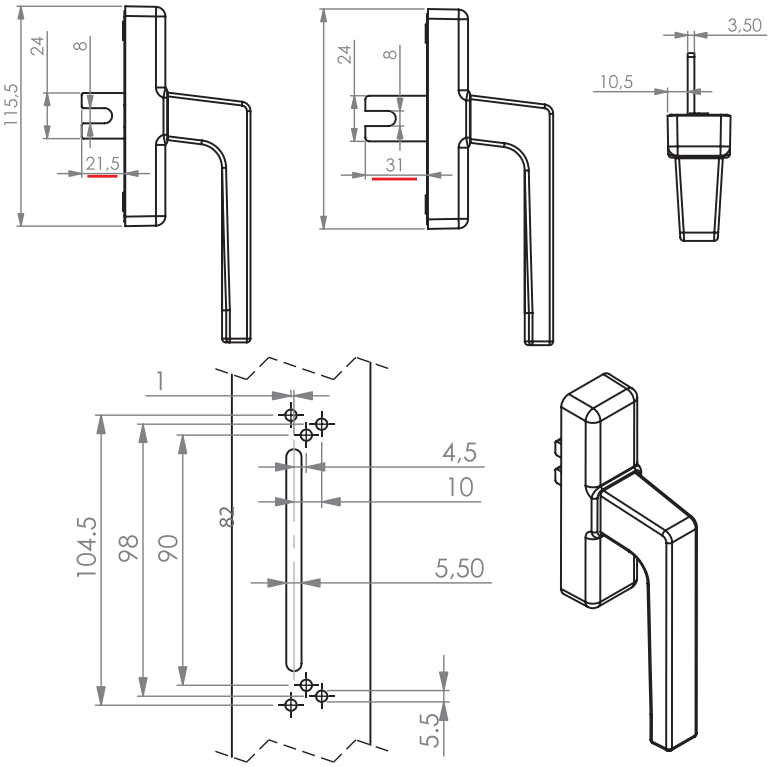

BODY	SPINDLE	PIN
115.5 mm	21.5/31 mm	3.5 mm

SCREW SPACING	PIN LENGTH
90 / 98 mm	10.5 mm

Dimensions in mm · please specify spindle length when ordering

304 CE ift TSE

CREMONE HANDLE · FACADE

NOVUS STRAIGHT HANDLE

115.5 mm
BODY LENGTH

FACADE B / B

TECHNICAL DRAWING

DIMENSIONS · mm

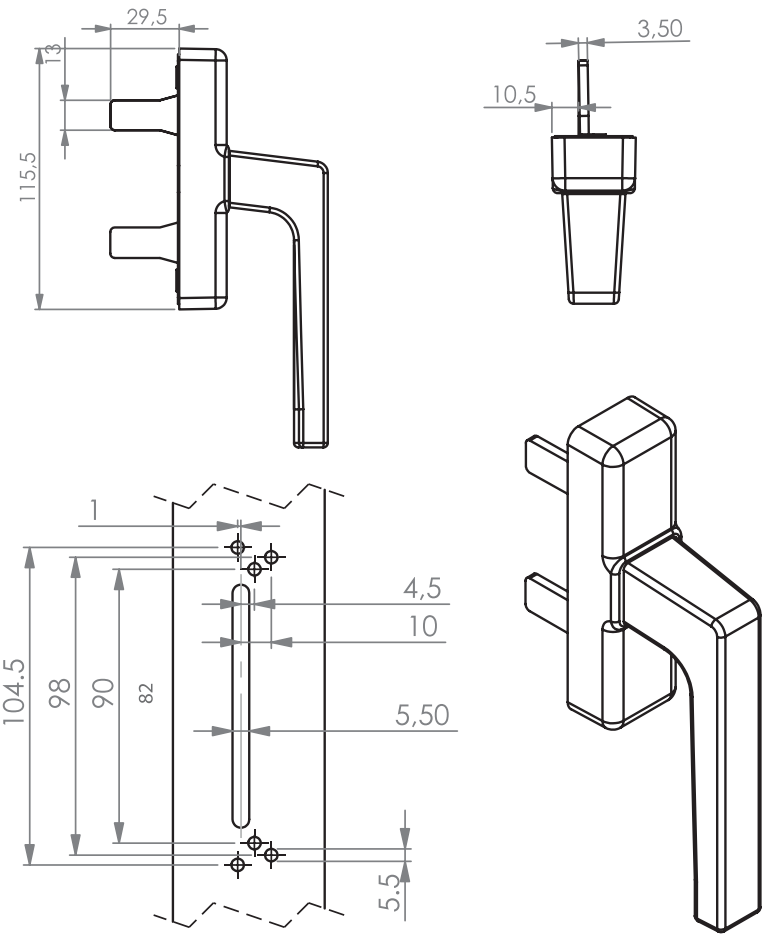

115.5 mm	29.5 mm	3.5 mm
BODY	LUG	PIN

SCREW SPACING	PIN LENGTH
90 / 98 mm	10.5 mm

Dimensions in mm · please specify spindle length when ordering

304 CE ift TSE

CREMONE HANDLE · WINDOW

BOSSY STRAIGHT HANDLE

115 mm
BODY LENGTH

WINDOW A / B

TECHNICAL DRAWING

DIMENSIONS · mm

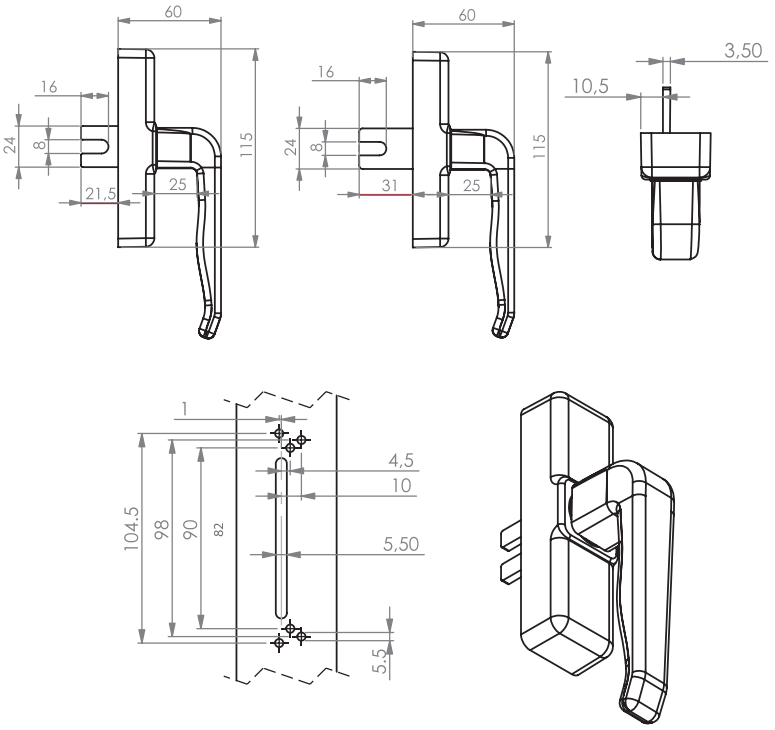

115 mm	21.5/31 mm	3.5 mm
BODY	SPINDLE	PIN

SCREW SPACING	TOTAL DEPTH
90 / 98 mm	60 mm

Dimensions in mm · please specify spindle length when ordering

304 CE ift TSE

CREMONE HANDLE · FACADE

BOSSY STRAIGHT HANDLE

115.5 mm
BODY LENGTH

FACADE B / B

TECHNICAL DRAWING

DIMENSIONS · mm

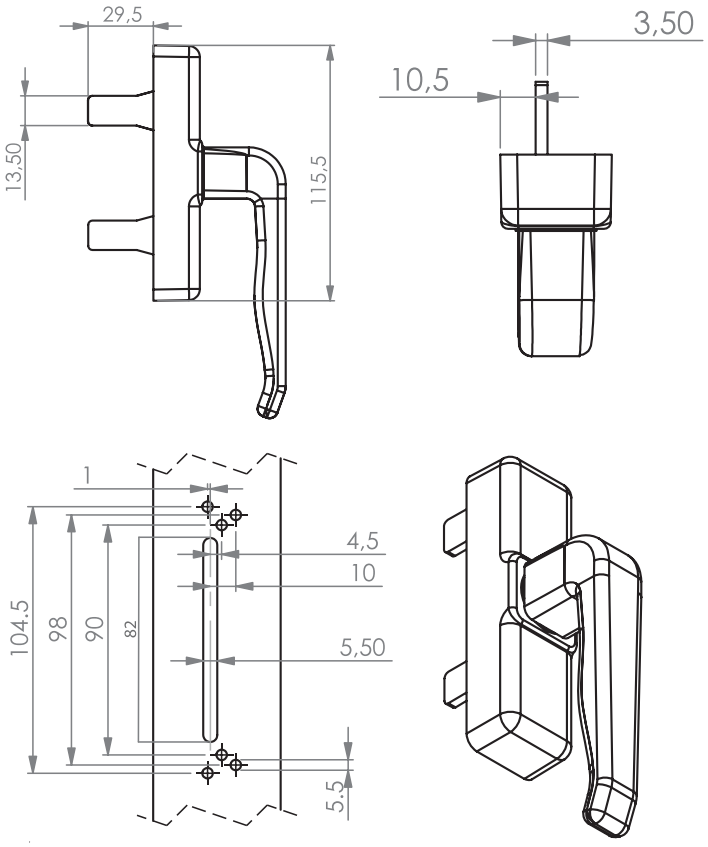

115.5 mm	29.5 mm	3.5 mm
BODY	LUG	PIN

SCREW SPACING	PIN LENGTH
90 / 98 mm	10.5 mm

Dimensions in mm · please specify spindle length when ordering

304 CE ift TSE

CREMONE HANDLE · WINDOW

BOSSY CURVED HANDLE

115.5 mm
BODY LENGTH

WINDOW A / B

TECHNICAL DRAWING

DIMENSIONS · mm

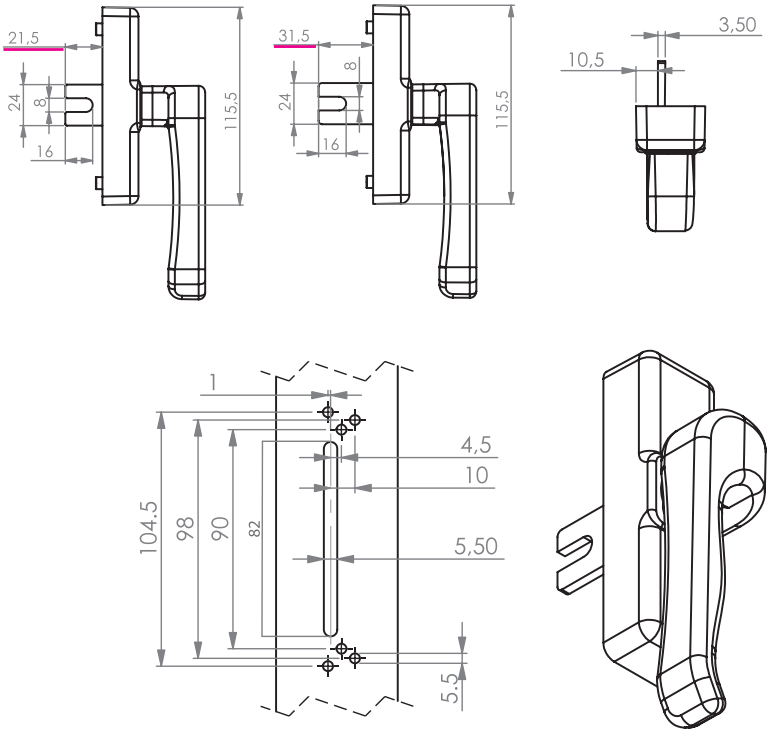

115.5 mm	21.5/31.5 mm	3.5 mm
BODY	SPINDLE	PIN

SCREW SPACING	PIN LENGTH
90 / 98 mm	10.5 mm

Dimensions in mm · please specify spindle length when ordering

304 CE ift TSE

CREMONE HANDLE · FACADE

BOSSY CURVED HANDLE

115.5 mm
BODY LENGTH

FACADE B / B

TECHNICAL DRAWING

DIMENSIONS · mm

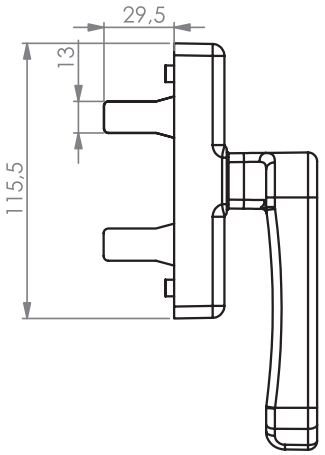



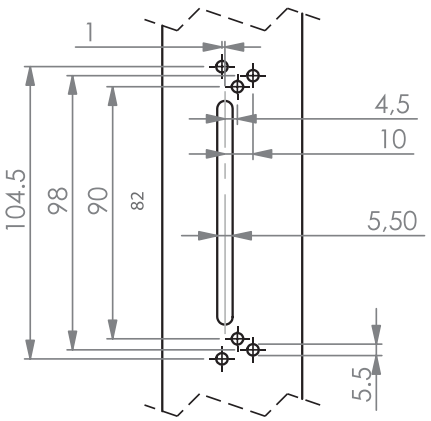

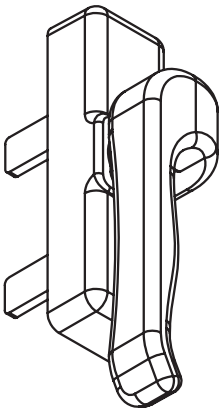

115.5 mm	29.5 mm	3.5 mm
BODY	LUG	PIN

SCREW SPACING	PIN LENGTH
90 / 98 mm	18.5 mm

Dimensions in mm · please specify spindle length when ordering

304 CE ift TSE

CREMONE HANDLE · WINDOW

NOVUS CURVED HANDLE

115.5 mm
BODY LENGTH

WINDOW A / B

TECHNICAL DRAWING

DIMENSIONS · mm

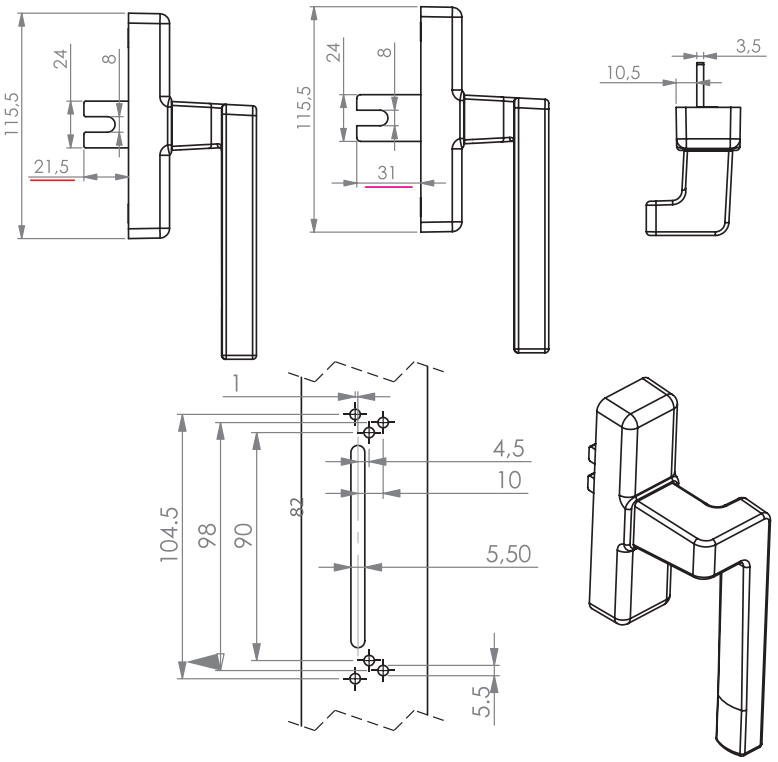

115.5 mm	21.5/31 mm	3.5 mm
BODY	SPINDLE	PIN

SCREW SPACING	PIN LENGTH
90 / 98 mm	10.5 mm

Dimensions in mm · please specify spindle length when ordering

304 CE ift TSE

CREMONE HANDLE · FACADE

NOVUS CURVED HANDLE

115.5 mm
BODY LENGTH

FACADE B / B

TECHNICAL DRAWING

DIMENSIONS · mm

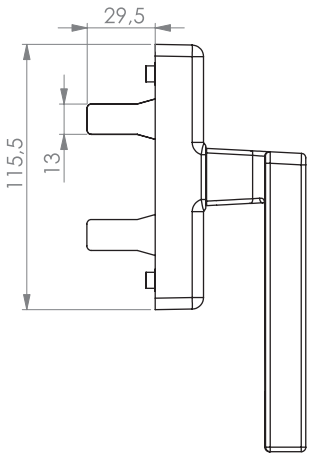



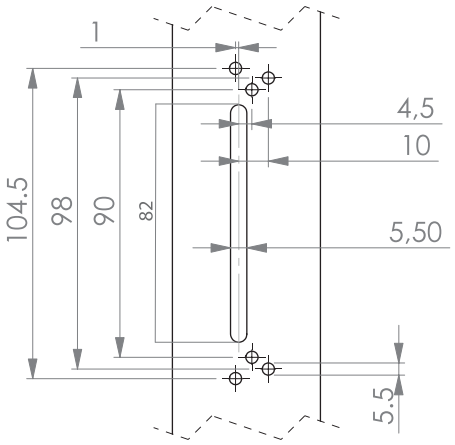

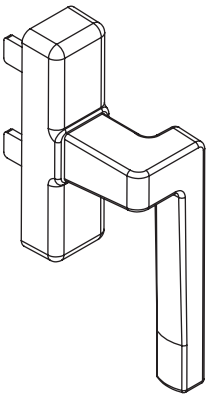

115.5 mm	29.5 mm	3.5 mm
BODY	LUG	PIN

SCREW SPACING	PIN LENGTH
90 / 98 mm	10.5 mm

Dimensions in mm · please specify spindle length when ordering

304 CE ift TSE

DOOR HANDLE

NOVUS DOOR HANDLE

±50°
ROTATION ANGLE

NOVUS · SQUARE ROSE

DOOR HANDLE

134 mm	65 mm	8 mm
HANDLE LENGTH	ROSE	SQUARE SPINDLE

TECHNICAL DRAWING

DIMENSIONS · mm

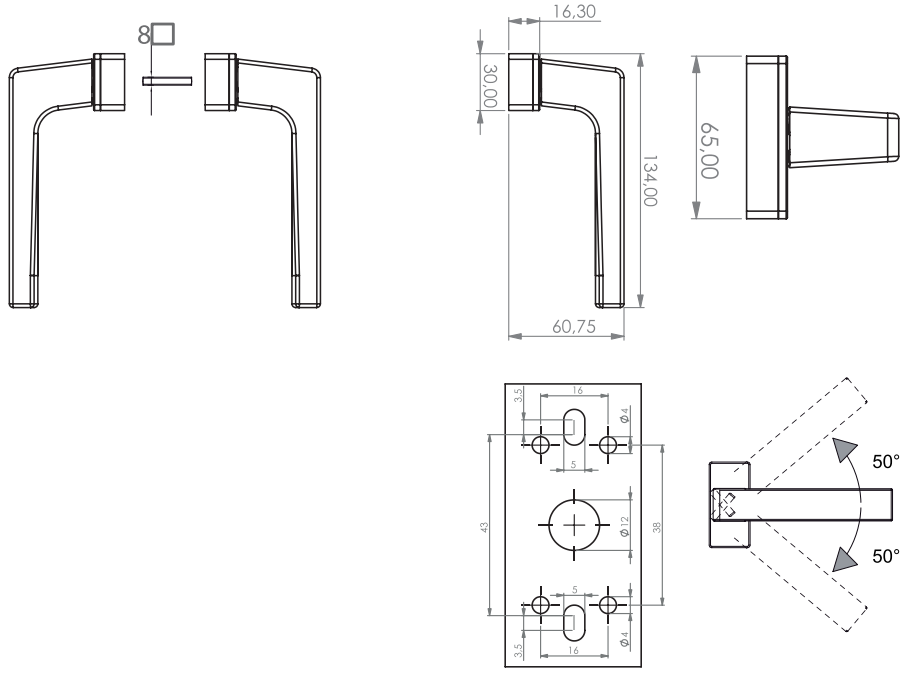

Dimensions in mm · 50° rotation in both directions

304 | CE | ift | TSE

WINDOW HANDLE

BOSSY BEZAULT HANDLE

48.6 mm
SCREW SPACING

BEZAULT 01 / 01

TECHNICAL INFORMATION

mm

Window handle with an articulated body and spindle output. The body is fixed to the sash with two screws; the handle rotates around the spindle axis.

48.6 mm SCREW SPACING	**21** mm BODY WIDTH
40 mm BODY LENGTH	**Ø11** mm SPINDLE DIAMETER
33 mm SPINDLE LENGTH	**27.5** mm JOINT

TECHNICAL DRAWING

DIMENSIONS · mm

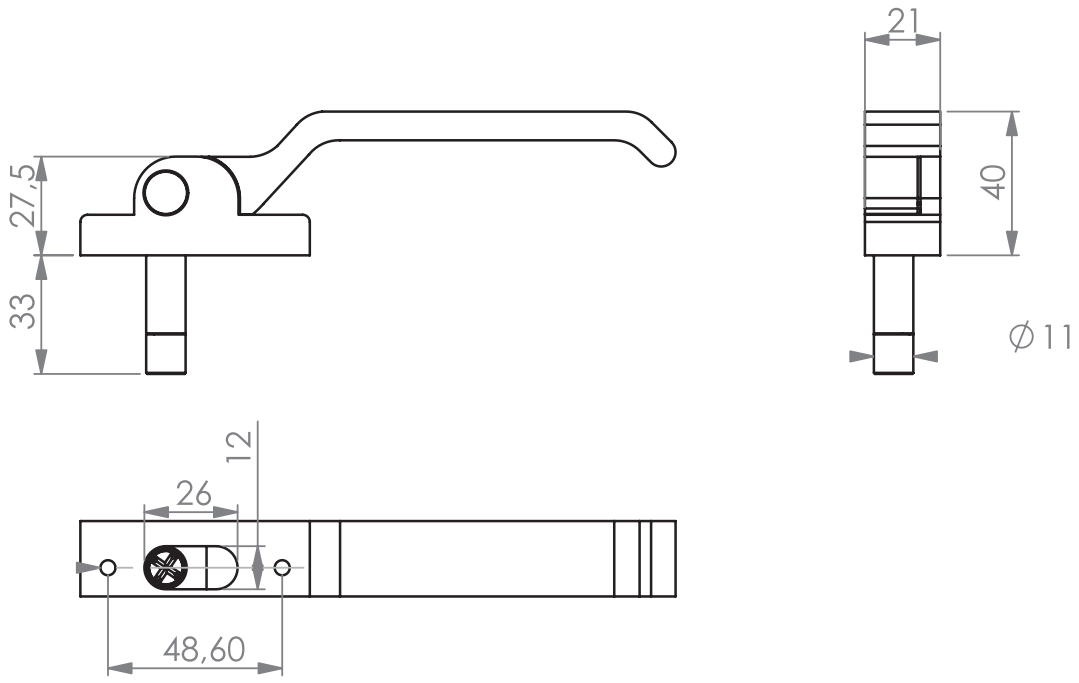

Dimensions in mm

304 CE ift TSE

05 · LIFT & SLIDE

05 LIFT & SLIDE

200 · 300 · 400 KG SETS

LIFT & SLIDE · 3300 MM

When the handle is turned, the sash lifts off the gaskets onto its carriages and slides easily. When the handle is closed, the sash lowers into place and presses against the gaskets to seal tightly.

400 kg	3300 mm	3300 mm
max. sash	sash width	sash height

CONTENTS

System data 85
Opening sche... 86
Quick selecti... 87
Connecting b... 88
Connecting b... 89
Carriage sets ... 90
Carriage set · ... 91
Assembly · 42... 92
Carriage sets ... 93
Assembly · 16 ... 96
Espagnolette ... 97
Pin espagnol... 98
System equip... 99
Installation d... 100
Sliding flush ... 102
Lift & slide h... 103
Machining di... 106
Use and mai... 107
Order list 108

LIFT & SLIDE

SYSTEM DATA

3300 mm
MAX. SASH HEIGHT

30 MM CHANNEL

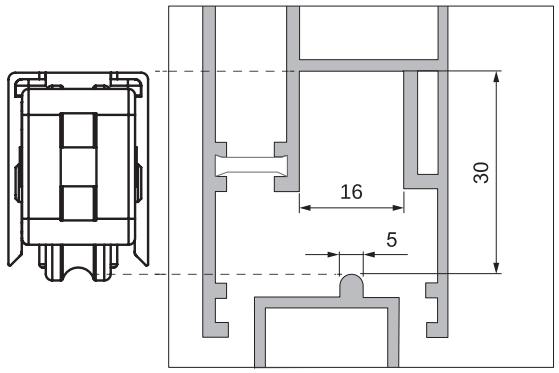

200 · 300 · 400 kg
MAX. SASH WEIGHT · CARRIAGE SET

Sash height	**3300 mm**
Sash width	**600–3300 mm**
Channel height	**30 mm**
Channel width	**16-18-22 mm**

42 MM CHANNEL

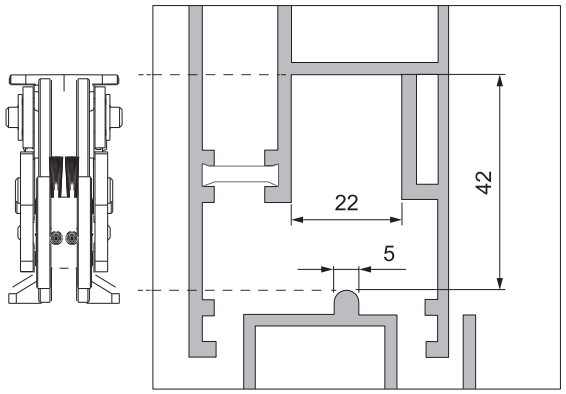

300 · 400 kg
MAX. SASH WEIGHT · CARRIAGE SET

Sash height	**3300 mm**
Sash width	**700–3300 mm**
Channel height	**42 mm**
Channel width	**22 mm**

- **Drive:** 37.5 mm or 27.5 mm lock–espagnolette backset, 80 mm handle screw spacing.
- See p. 86 for opening schemes and hardware quantities per scheme.

Dimensions in mm · please state the opening scheme when ordering

304 CE ift TSE

SYSTEM

OPENING SCHEMES

7
SCHEME TYPES

SCHEMES

VIEW FROM INSIDE · TRACK PLAN

A
2 SASHES
1 sliding
1 fixed

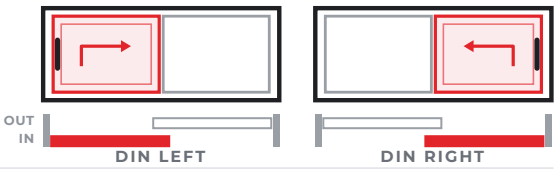

C
4 SASHES
2 sliding
2 fixed

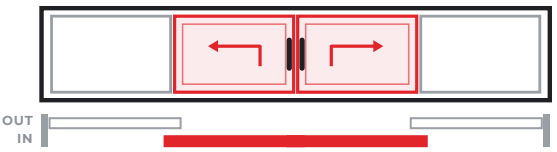

D
2 SASHES
2 sliding
0 fixed

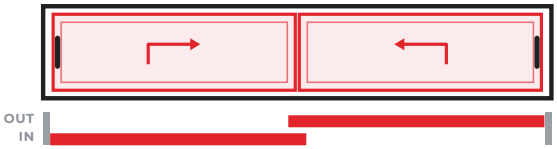

F
4 SASHES
4 sliding
0 fixed

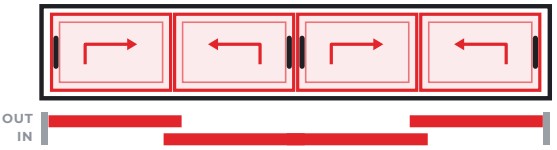

G
3 SASHES
1 sliding
2 fixed

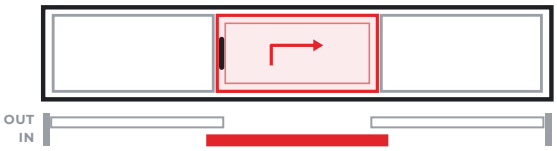

H
3 SASHES
3 sliding
0 fixed

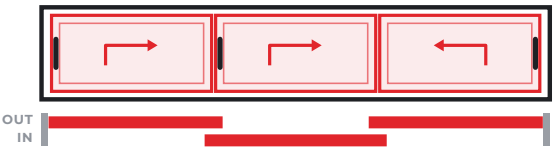

K
3 SASHES
2 sliding
1 fixed

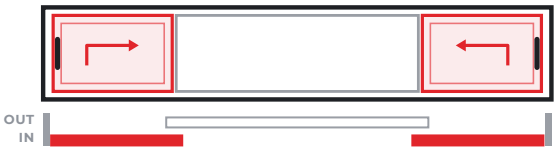

Sliding sash · arrow: lift and slide direction

HARDWARE BY SCHEME

QTY · PER SCHEME

SCHEME	SASHES	SLIDING	FIXED	CARRIAGE SET	ESPAGNOLETTE	HANDLE
A	2	1	1	1	1	1
C	4	2	2	2	2	2
D	2	2	–	2	2	2
F	4	4	–	4	4	4
G	3	1	2	1	1	1
H	3	3	–	3	3	3
K	3	2	1	2	2	2

- Each sliding sash takes one carriage set, one espagnolette and one lift & slide handle.
- The number of locking points and connecting bars depends on sash size; see the tables on pp. 87–89 for selection.
- State the scheme letter and the opening direction of the sliding sash (right / left) when ordering.

Schemes are viewed from inside · state DIN left / right when ordering

304 CE ift TSE

SELECTION TABLE

QUICK SELECTION

400 kg
MAX. SASH WEIGHT

APPLICATION DIAGRAM

EXAMPLE · 40 kg/m²

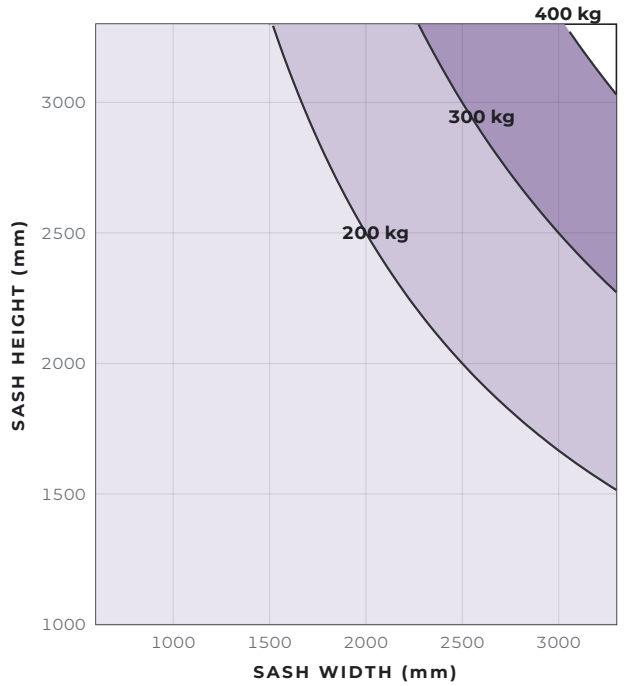

- Sash weight = sash area (m²) × unit weight (kg/m²). The diagram is for an example unit weight of 40 kg/m².
- The calculated sash weight must not exceed the capacity of the selected carriage set.

EXAMPLE CALCULATION

Sash 2500 × 2800 mm → area 7.0 m²
7.0 m² × 40 kg/m² = **280 kg**
Selection: **300 kg carriage set**

CARRIAGE SET SELECTION

CHANNEL × WEIGHT

CHANNEL	200	300	400	PAGE
30 × 22 mm	•	•	•	90
42 × 22 mm	–	•	•	91
16 · 18 · 22 profile	•	•	•	93–95

ESPAGNOLETTE SELECTION

BY SASH HEIGHT

LENGTH L	HANDLE HT.	SASH HT. MIN – MAX
1800 mm	510 mm	880-1860 mm
2100 mm	1018 mm	1580-2160 mm
2400 mm	1018 mm	1880-2460 mm
2700 mm	1018 mm	2180-2760 mm
3000 mm	1018 mm	2780-3060 mm

SYSTEM LIMITS

30 · 42 mm CHANNEL

SASH HEIGHT	SASH WIDTH
max. 3300 mm	**680 / 750 – 3300 mm**
BACKSET	**SCREW SPACING**
27.5 / 37.5 mm	**80 mm**

- Minimum sash width is 680 mm with the 30 mm channel and 750 mm with the 42 mm channel.
- See pp. 88–89 for connecting bar selection.

GLASS WEIGHT CALCULATION

kg/m²

FORMULA

Glass weight (kg/m²) = total glass thickness (mm) × 2.5

Glass density 2500 kg/m³; 1 mm of glass = 2.5 kg/m².
The cavity (air / argon) is not included.

Sash weight = sash area (m²) × glass weight (kg/m²) + profile and hardware weight.

GLASS BUILD-UP	TOTAL GLASS	WEIGHT
4 + 16 + 4	8 mm	20 kg/m²
6 + 16 + 6	12 mm	30 kg/m²
8 + 16 + 8	16 mm	40 kg/m²
4 + 12 + 4 + 12 + 4	12 mm	30 kg/m²
6 + 14 + 6 + 14 + 6	18 mm	45 kg/m²

— for marked values, please consult our technical support team

304 CE ift TSE

SELECTION TABLE

CONNECTING BAR

42 × 22 mm CHANNEL

BY SASH WIDTH

ALL CARRIAGE SETS

300 · 400 KG

BAR	LENGTH	SASH W. MIN	SASH W. MAX
SIZE 1	900 mm	750 mm	1500 mm
SIZE 2	1400 mm	1501 mm	1930 mm
SIZE 3	1900 mm	1931 mm	2430 mm
SIZE 4	2650 mm	2431 mm	3300 mm

HOW TO SELECT

- Select the bar from the table for your channel type according to sash width.
- In the 30 × 22 mm channel, selection depends on the load capacity of the carriage set used (200 / 300 / 400 kg).
- For sizes at the range limits, consult our technical support team.

30 × 22 mm CHANNEL

BY CARRIAGE SET

CARRIAGE SET · 200 KG

mm

BAR	LENGTH	SASH W. MIN	SASH W. MAX
SIZE 1	900 mm	700 mm	1390 mm
SIZE 2	1400 mm	1391 mm	1890 mm
SIZE 3	1900 mm	1891 mm	2390 mm

CARRIAGE SET · 300 KG

mm

BAR	LENGTH	SASH W. MIN	SASH W. MAX
SIZE 1	900 mm	730 mm	1550 mm
SIZE 2	1400 mm	1551 mm	2040 mm
SIZE 3	1900 mm	2041 mm	2550 mm

CARRIAGE SET · 400 KG

mm

BAR	LENGTH	SASH W. MIN	SASH W. MAX
SIZE 1	900 mm	800 mm	1620 mm
SIZE 2	1400 mm	1621 mm	2120 mm
SIZE 3	1900 mm	2121 mm	2620 mm

BAR LENGTHS

mm

SIZE 1 **900 mm**	SIZE 2 **1400 mm**
SIZE 3 **1900 mm**	SIZE 4 **2650 mm · 42 × 22**

RANGE CHART

SASH WIDTH · mm

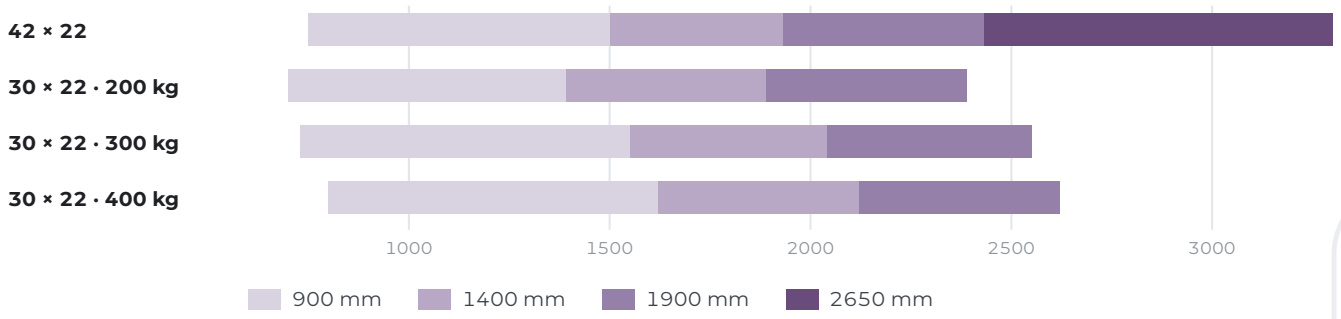

Bar length is selected by sash width · dimensions in mm

304 CE ift TSE

SELECTION TABLE

CONNECTING BAR

30 × 16
MM CHANNEL

30 × 16 mm CHANNEL — CARRIAGE SET · 200 KG

BAR	LENGTH	SASH W. MIN	SASH W. MAX
SIZE 1	900 mm	680 mm	1330 mm
SIZE 2	1400 mm	1310 mm	1830 mm
SIZE 3	1900 mm	1810 mm	2330 mm

30 × 16 mm CHANNEL — CARRIAGE SET · 300 KG

BAR	LENGTH	SASH W. MIN	SASH W. MAX
SIZE 1	900 mm	750 mm	1400 mm
SIZE 2	1400 mm	1380 mm	1900 mm
SIZE 3	1900 mm	1880 mm	2400 mm

30 × 16 mm CHANNEL — CARRIAGE SET · 400 KG

BAR	LENGTH	SASH W. MIN	SASH W. MAX
SIZE 1	900 mm	1040 mm	1700 mm
SIZE 2	1400 mm	1680 mm	2200 mm
SIZE 3	1900 mm	2180 mm	2700 mm

HOW TO SELECT

- Select the bar from the table for your channel type according to sash width.
- Selection depends on the load capacity of the carriage set used (200 / 300 / 400 kg).
- For sizes at the range limits, consult our technical support team.

RANGE CHART

SASH WIDTH · mm

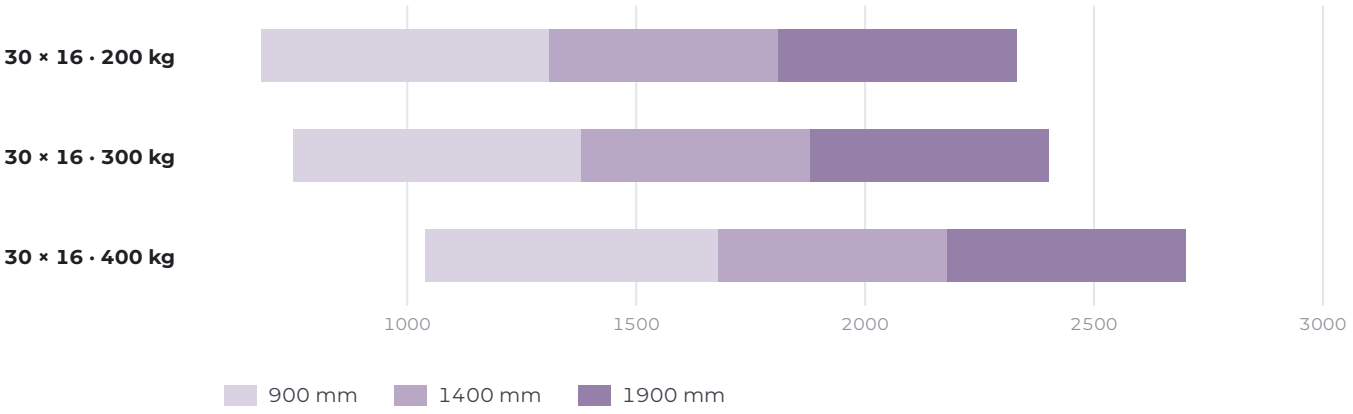

Bar length is selected by sash width · dimensions in mm

304 CE ift TSE

CARRIAGE SETS

30 MM CHANNEL

400 kg
MAX. SASH WEIGHT

200 KG CARRIAGE SET

CORNER-DRIVEN FRONT CARRIAGE · REAR CARRIAGE

200
KG · 30 MM CHANNEL

300 KG CARRIAGE SET

CORNER-DRIVEN FRONT CARRIAGE · REAR CARRIAGE

300
KG · 30 MM CHANNEL

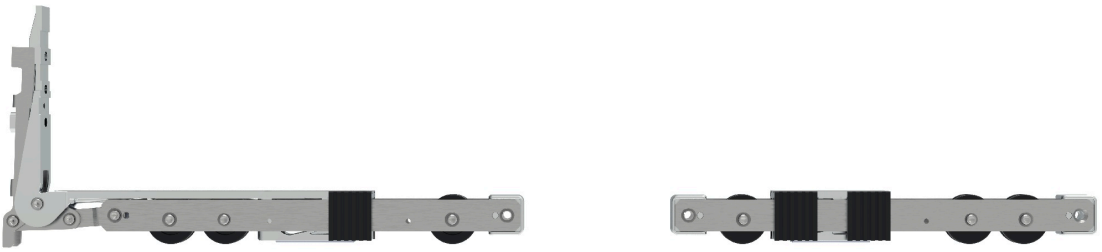

400 KG CARRIAGE SET

CORNER-DRIVEN FRONT CARRIAGE · REAR CARRIAGE

400
KG · 30 MM CHANNEL

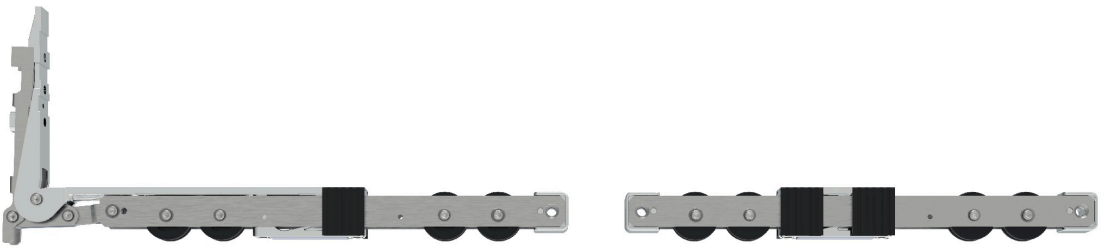

Channel 30 × 22 mm · section on p. 85

304 CE ift TSE

CARRIAGE SET

42 MM CHANNEL

300 kg
CARRIAGE SET

CHANNEL 42 × 22 mm

CARRIAGE SET PERSPECTIVE

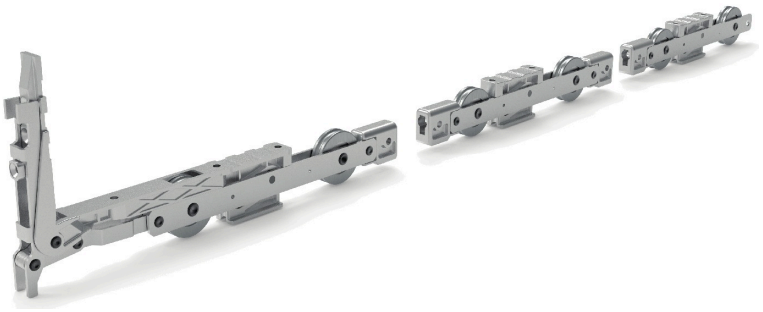

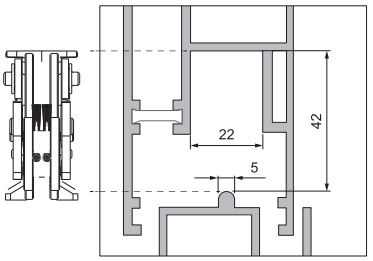

CARRIAGE SET CORNER-DRIVEN FRONT CARRIAGE + REAR CARRIAGE

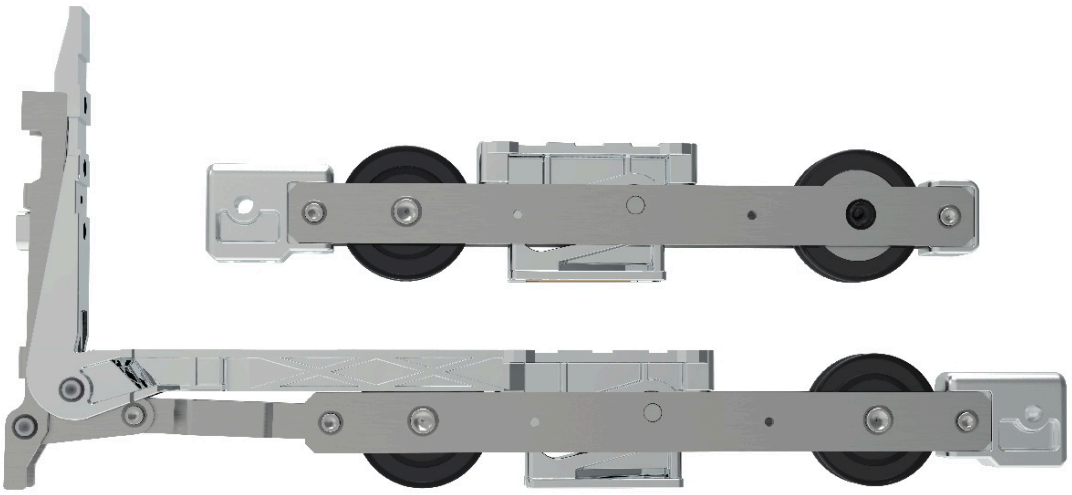

REAR CARRIAGE SINGLE CARRIAGE

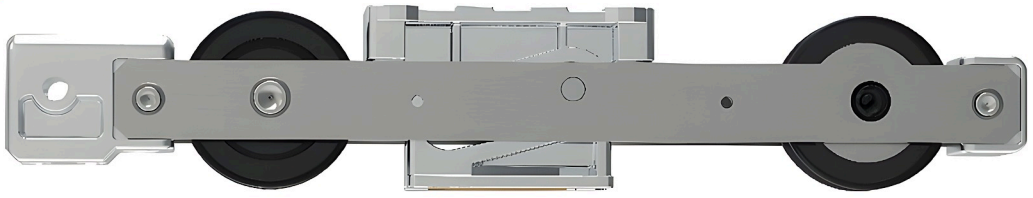

Channel 42 × 22 mm · for 300–400 kg sashes

304 CE ift TSE

ASSEMBLY DIAGRAM

LIFT & SLIDE 42 MM SET

42 × 22 mm
CHANNEL · VIEW FROM INSIDE

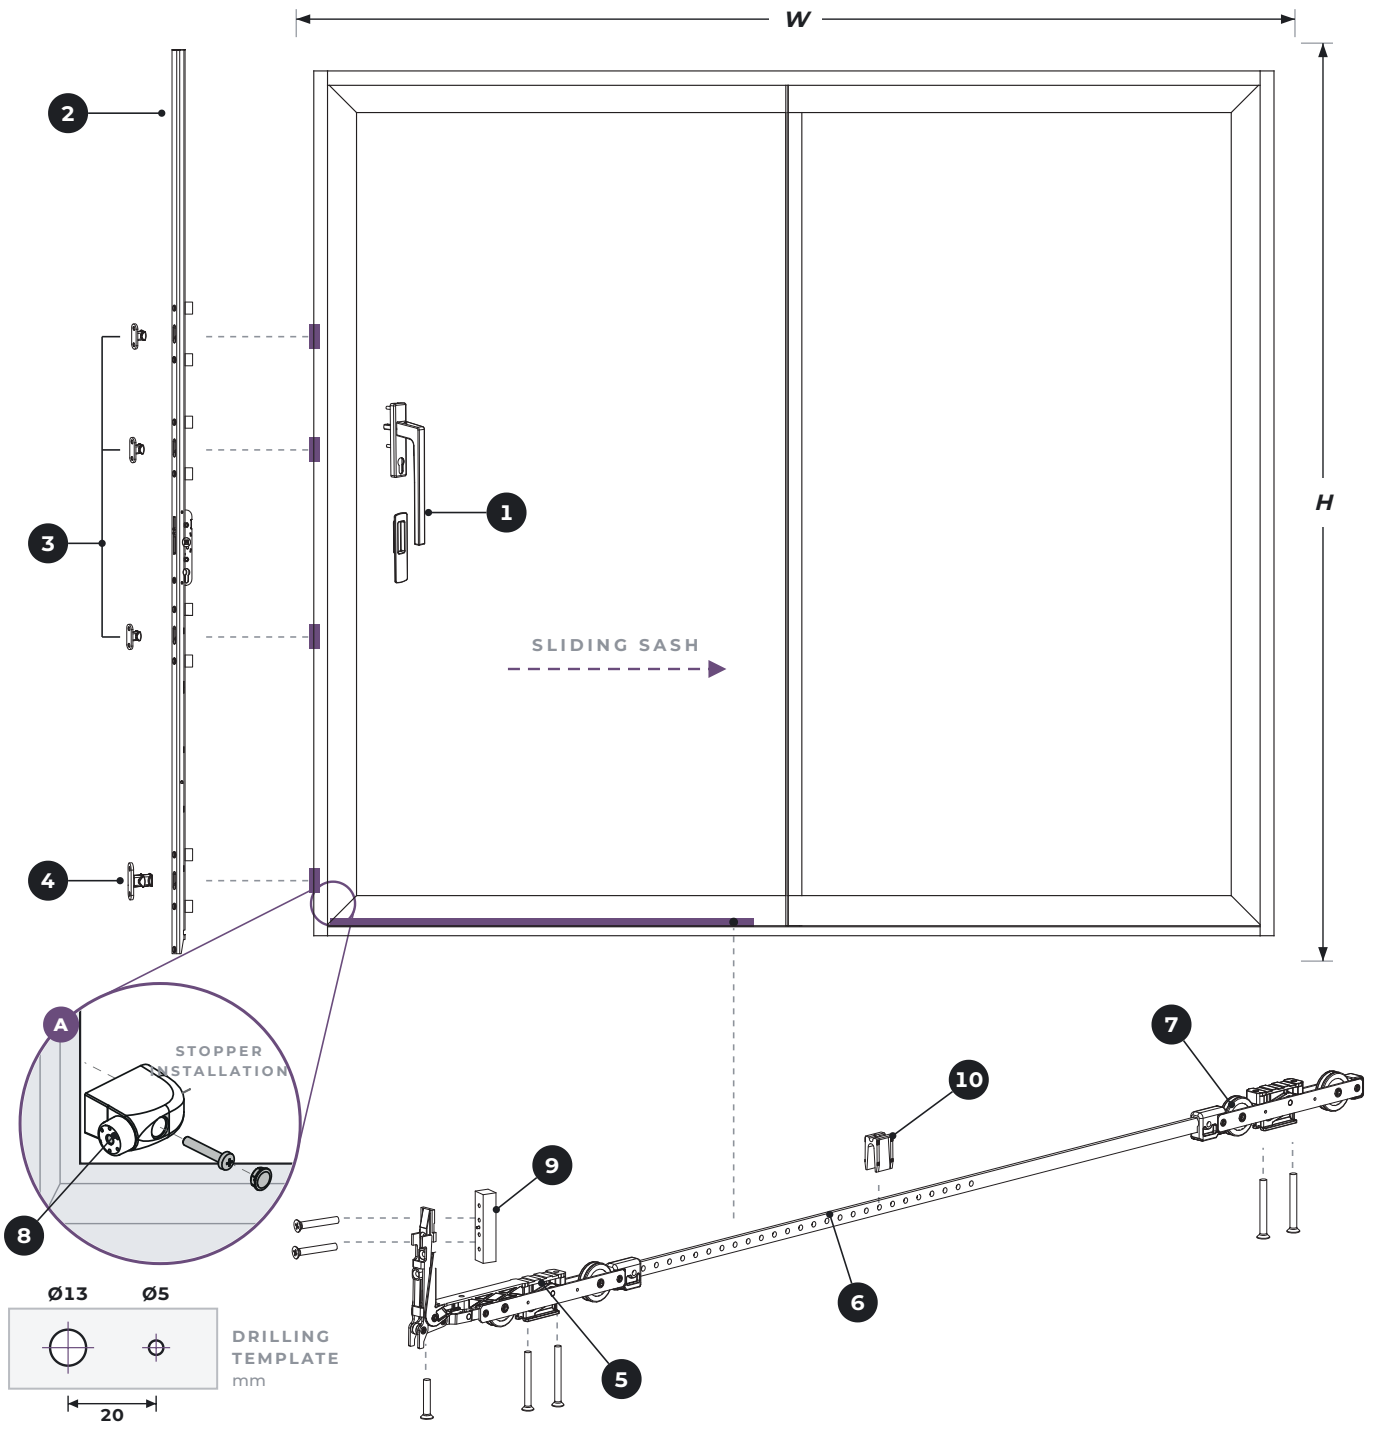

SET CONTENTS

Carriage set p. 91 · espagnolette lengths p. 97 · installation details p. 100

1. Lift & slide handle
2. Espagnolette
3. Locking point · 3 pcs
4. Bottom locking point
5. Front carriage
6. Connecting bar
7. Rear carriage
8. Stopper
9. Filler cap
10. Bar support

CARRIAGE SET

16 · 18 · 22 PROFILE

200 kg
CARRIAGE SET

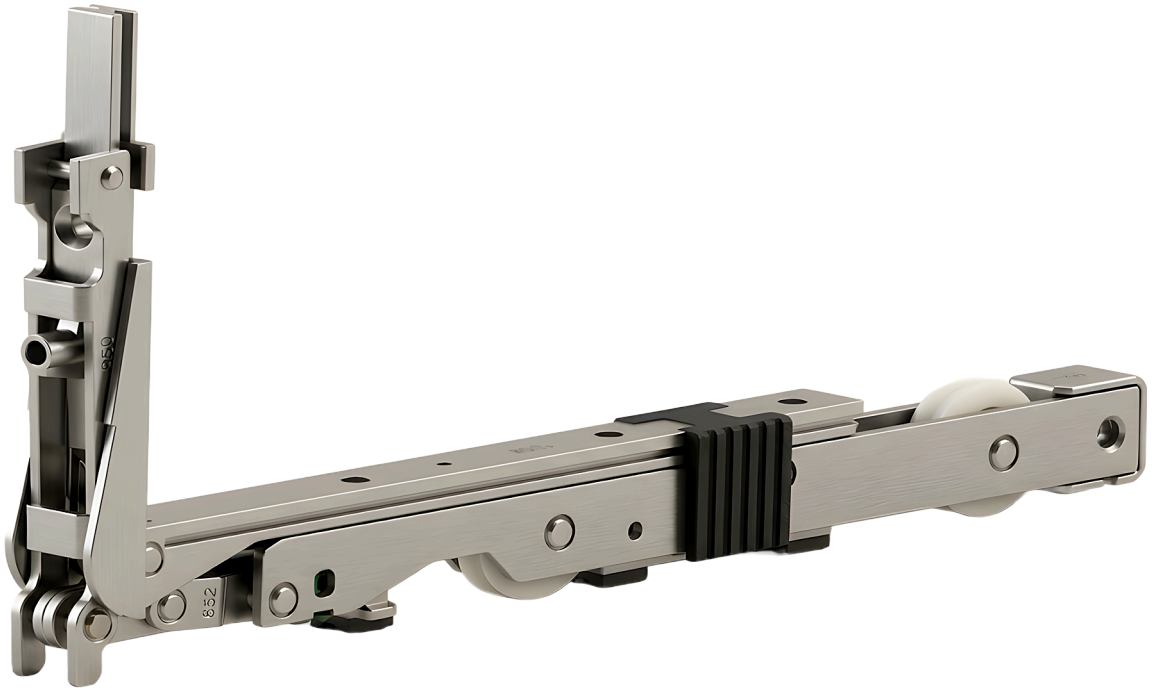

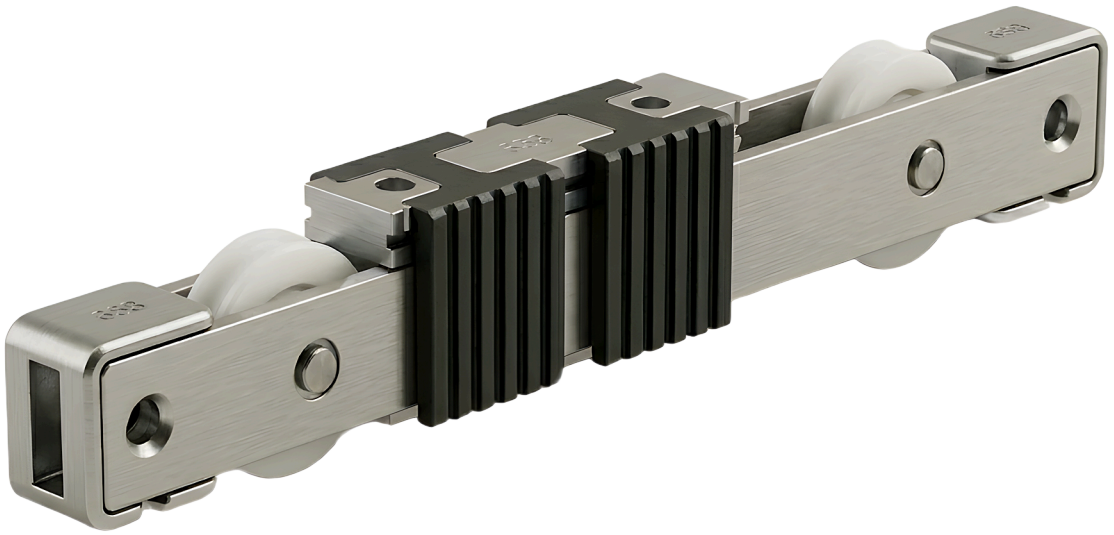

For 16 × 18 × 22 mm channel profiles · 200 kg

304 | CE | ift | TSE

CARRIAGE SET

16 · 18 · 22 PROFILE

300 kg
CARRIAGE SET

FRONT CARRIAGE

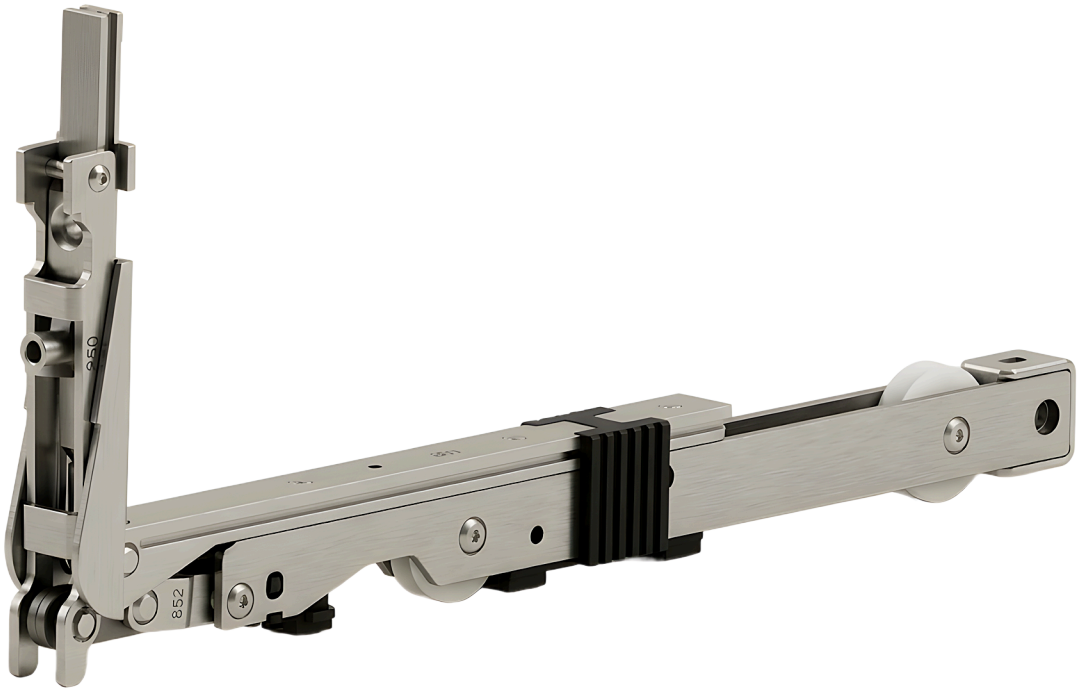

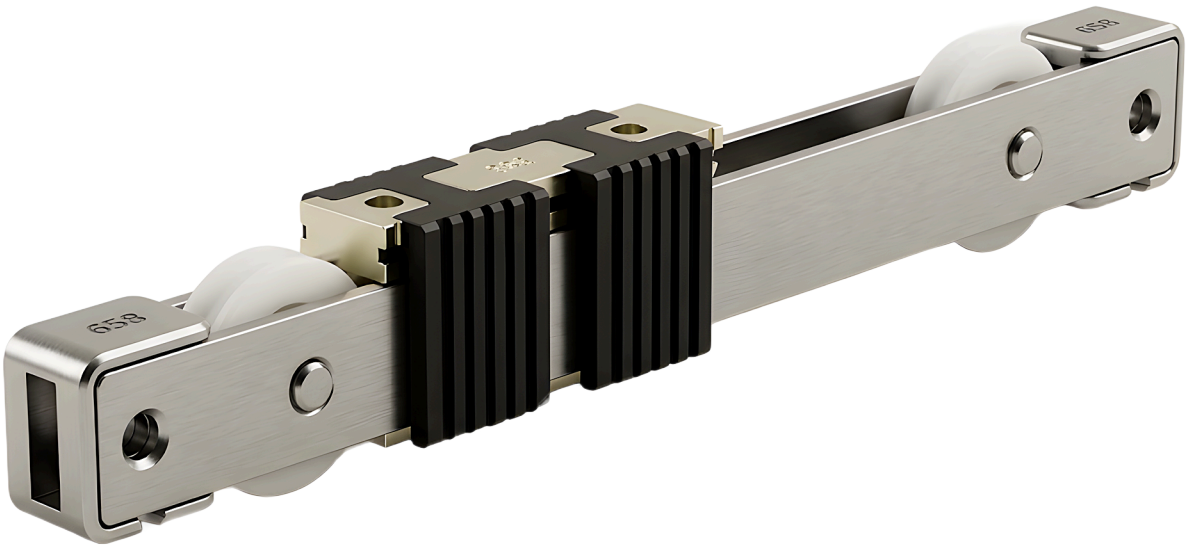

For 16 × 18 × 22 mm channel profiles · 300 kg

304 CE ift TSE

CARRIAGE SET

16 · 18 · 22 PROFILE

400 kg
CARRIAGE SET

FRONT CARRIAGE

For 16 × 18 × 22 mm channel profiles · 400 kg

304 CE ift TSE

ASSEMBLY DIAGRAM

LIFT & SLIDE 16 MM SET

16 mm

PROFILE CHANNEL · VIEW FROM INSIDE

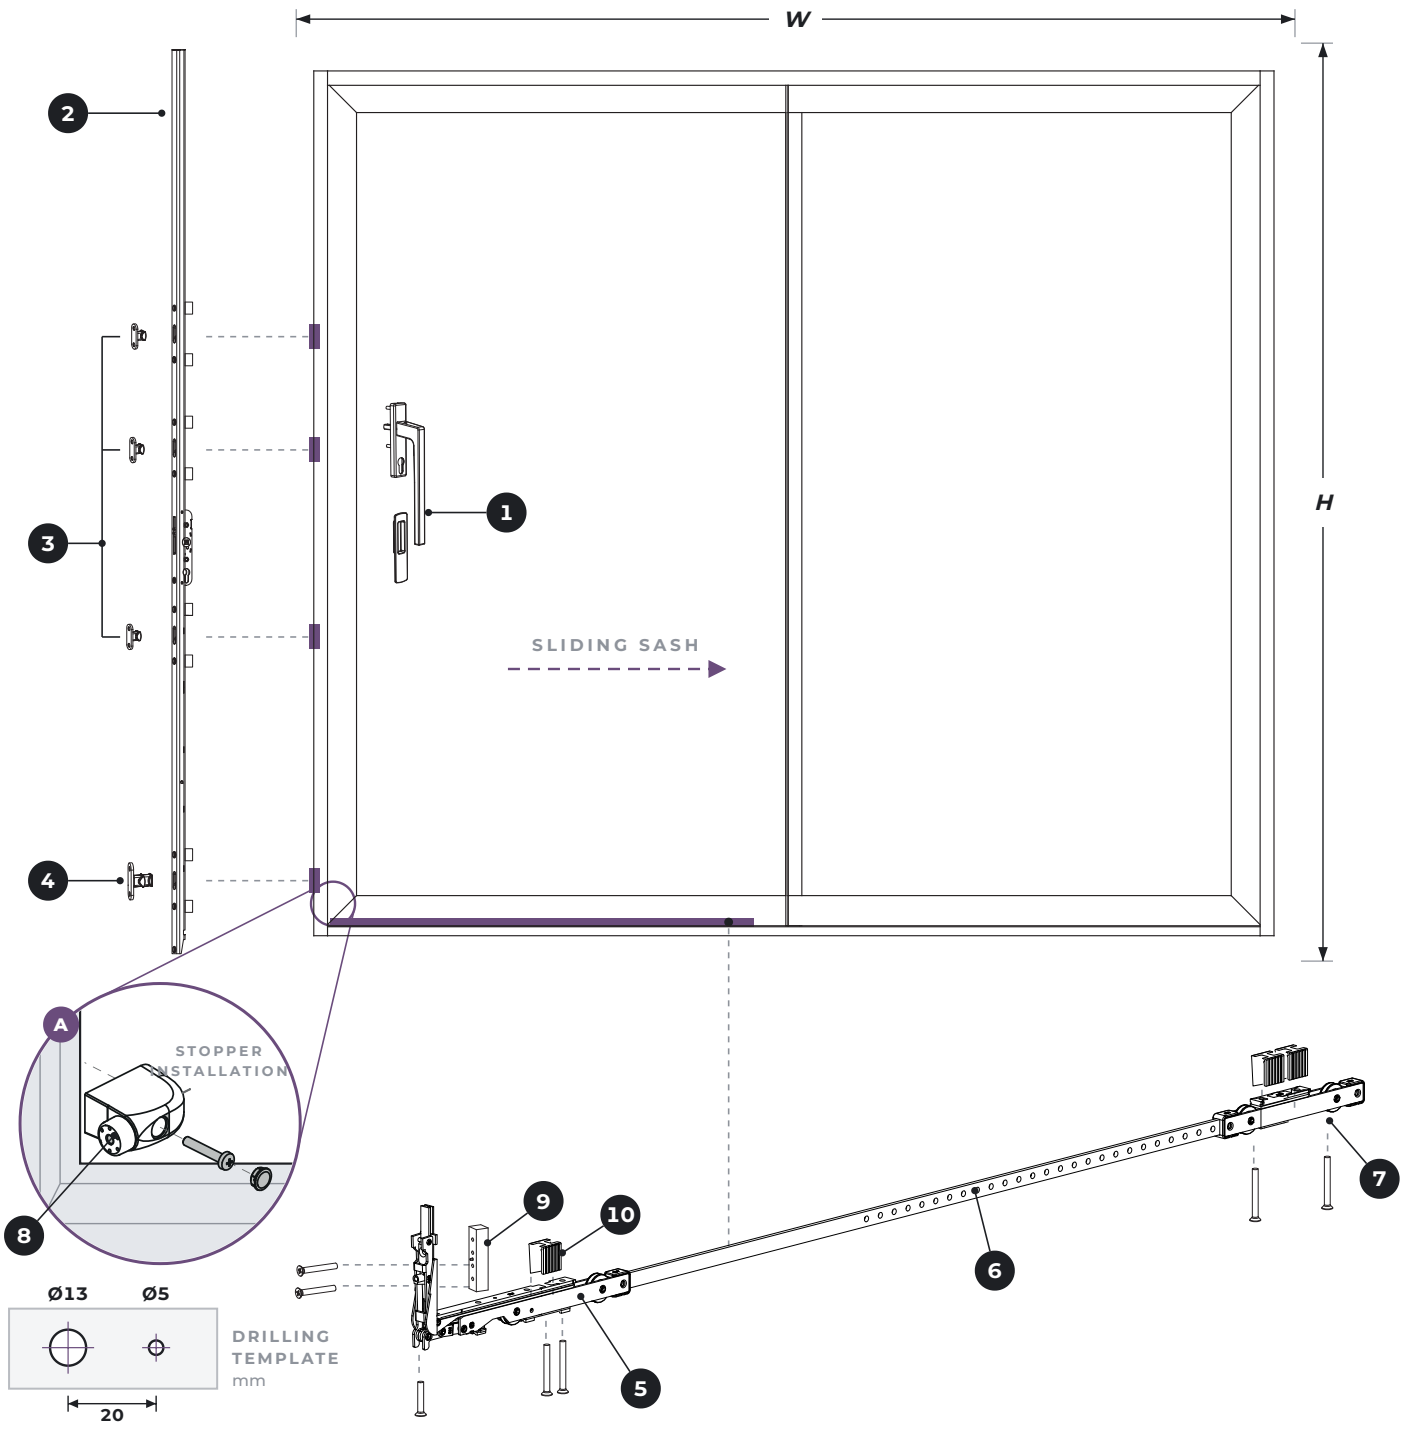

SET CONTENTS

Espagnolette lengths p. 97 · installation details p. 100

1. Lift & slide handle
2. Espagnolette
3. Locking point · 3 pcs
4. Bottom locking point
5. Front carriage
6. Connecting bar
7. Rear carriage
8. Stopper
9. Filler cap
10. Carriage plastic

DRIVE

ESPAGNOLETTE

80 mm
SCREW SPACING

ESPAGNOLETTE LENGTHS

L · mm

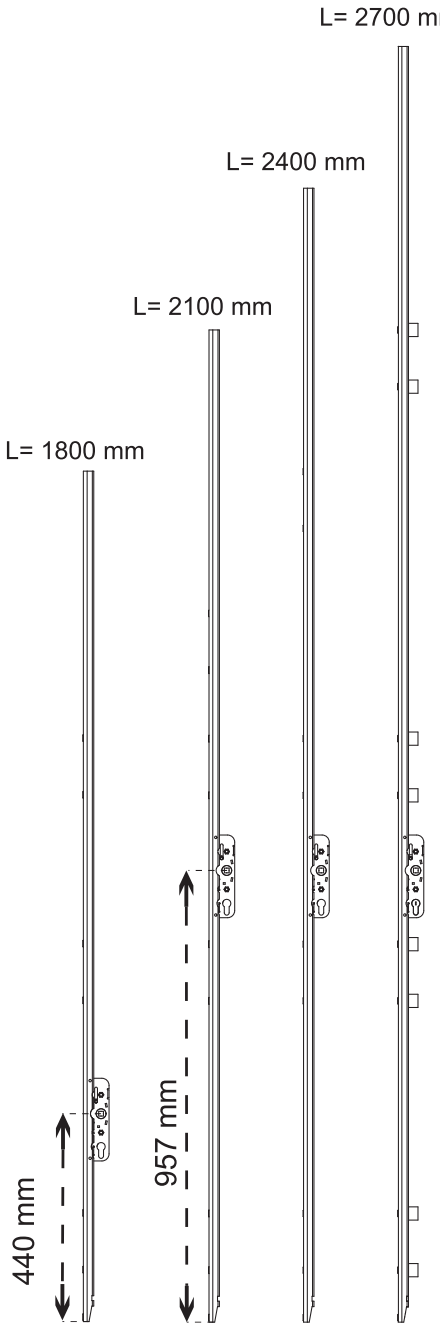

LENGTH SELECTION

BY SASH HEIGHT

L 1800 mm Handle height **440 mm**	**L 2100** mm Handle height **957 mm**
L 2400 mm Handle height **957 mm**	**L 2700** mm Handle height **957 mm**

BACKSET

27.5 · 37.5 mm

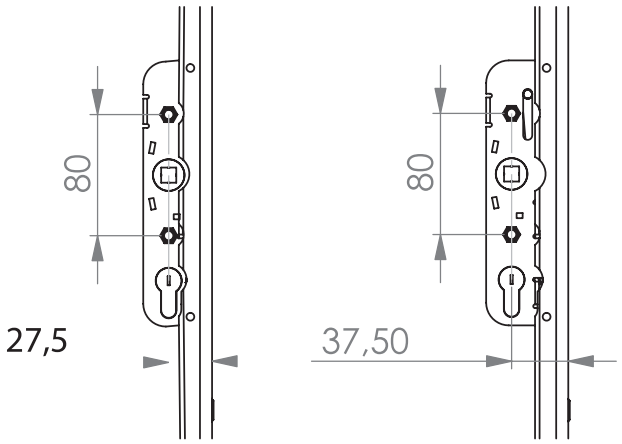

BACKSET	SCREW SPACING
27.5 / 37.5 mm	**80 mm**

- The espagnolette length is selected according to sash height.
- The backset must be specified as 27.5 or 37.5 mm, depending on the profile.

Dimensions in mm

304 CE ift TSE

DRIVE

PIN ESPAGNOLETTE

PIN ESPAGNOLETTE LENGTHS

L · mm

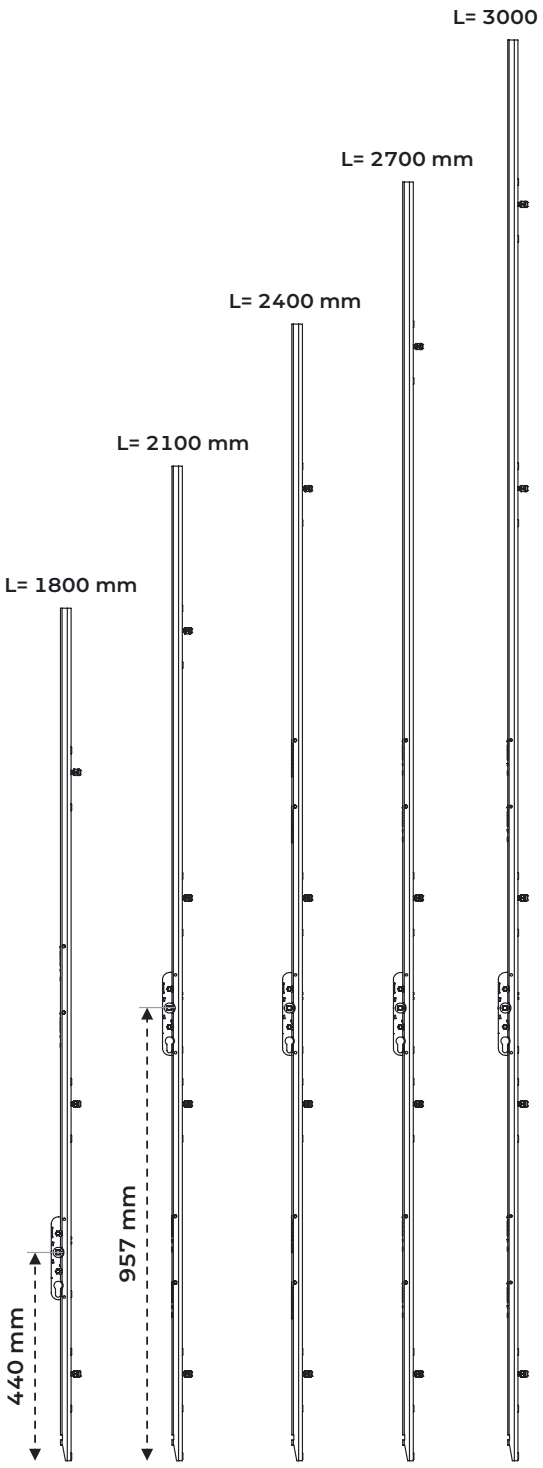

LENGTH SELECTION

BY SASH HEIGHT

L 1800 mm
Handle height **440 mm**

L 2100 mm
Handle height **957 mm**

L 2400 mm
Handle height **957 mm**

L 2700 mm
Handle height **957 mm**

L 3000 mm
Handle height **957 mm**

BACKSET

27.5 · 37.5 mm

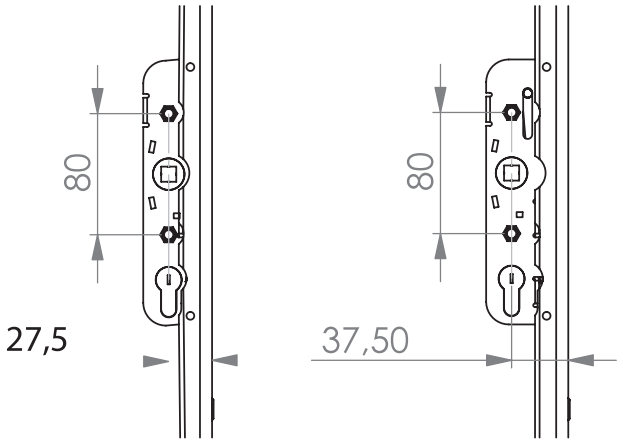

BACKSET	SCREW SPACING
27.5 / 37.5 mm	**80 mm**

- The pin espagnolette length is selected according to sash height.
- The backset must be specified as 27.5 or 37.5 mm, depending on the profile.

Dimensions in mm

304 CE ift TSE

HARDWARE

PIN ESPAGNOLETTE ACCESSORIES

01

KEEPER
Standard keeper

02

KEEPER
Flat keeper

03

LOCKING PIN
Single-stage

04

LOCKING PIN
Two-stage

Dimensions in mm

304 CE ift TSE

INSTALLATION

INSTALLATION DETAILS

CARRIAGE INSTALLATION

EXPLODED VIEW

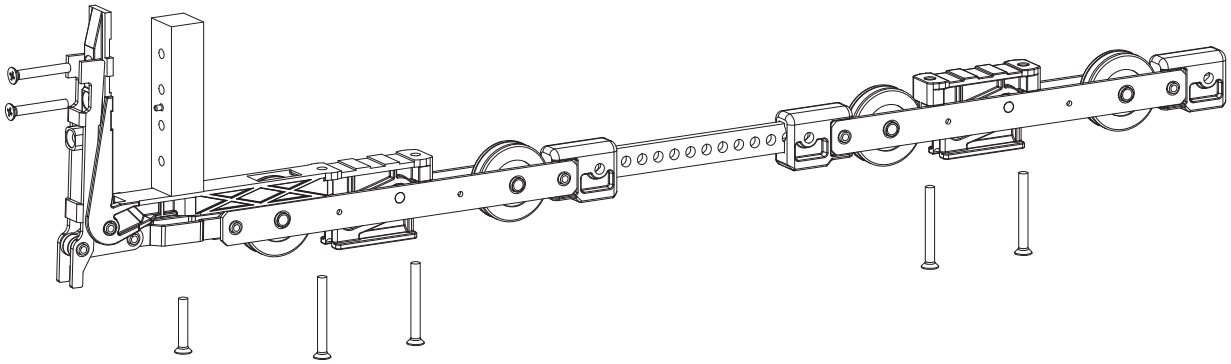

SASH VIEW

FROM INSIDE

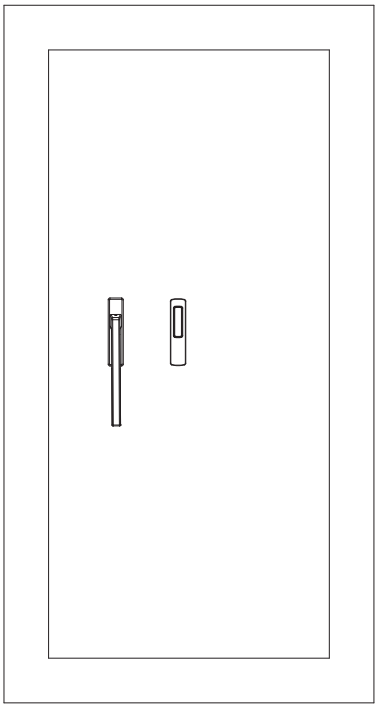

STOPPER INSTALLATION

mm

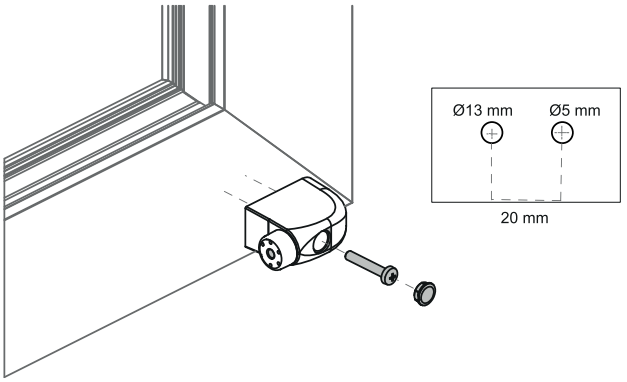

DRILLING	HOLE SPACING
Ø13 / Ø5 mm	20 mm

Dimensions in mm

304 CE ift TSE

HARDWARE

SYSTEM ACCESSORIES

9 PARTS

01

STOPPER
Sash stop

02

FILLER CAP
Espagnolette filler cap

03



BAR SUPPORT
Bottom connecting bar support

04



LOCKING POINT
Sliding sash

05

MICRO-VENTILATION
Locking point

06

LOCKING POINT
Fixed

07



LOCKING KEEPER
Single-stage

08

LOCKING KEEPER
Two-stage

09

CARRIAGE SPACER

Dimensions in mm

304 CE ift TSE

SLIDING HANDLE

BOSSY FLUSH PULL HANDLE

150 mm
HANDLE LENGTH

SLIDING HANDLE

TECHNICAL DRAWING

DIMENSIONS · mm

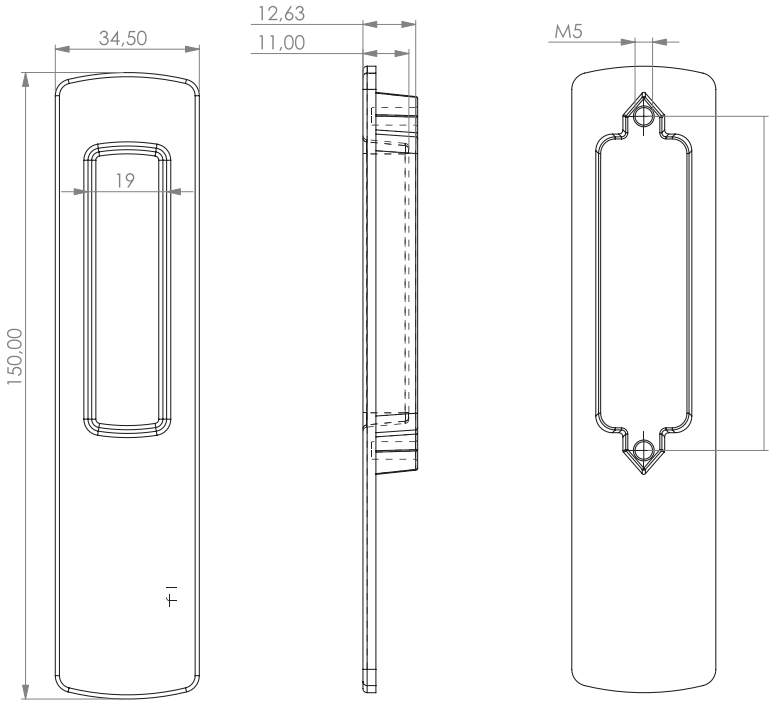

150 mm	34.5 mm	12.6 mm
LENGTH	WIDTH	DEPTH

CONNECTION	GRIP WIDTH
M5 screw	19 mm

Dimensions in mm

304 CE ift TSE

LIFT & SLIDE

NOVUS LIFT & SLIDE

80 mm
HOLE SPACING

LIFT & SLIDE 01 / 01

TECHNICAL DRAWING

DRILLING TEMPLATE · mm

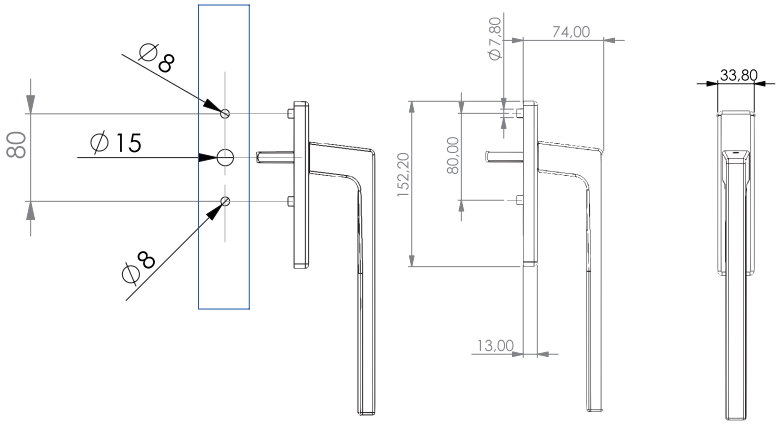

SPINDLE HOLE	SCREW HOLE	SQUARE SPINDLE
Ø15 mm	Ø8 mm	10 mm

INSTALLATION

INNER + OUTER HANDLE WITH CYLINDER

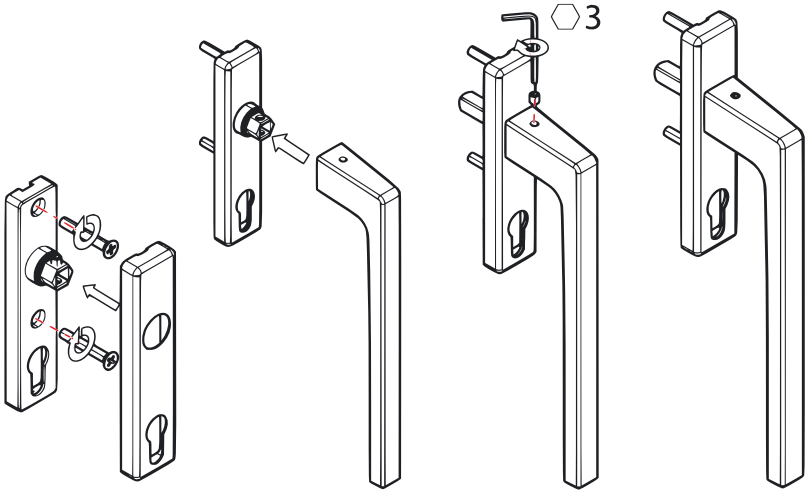

152.2 mm	80 mm	74 mm
PLATE	DRILLING	HANDLE

Dimensions in mm · 3 mm Allen key

304 CE ift TSE

LIFT & SLIDE

NOVUS LIFT & SLIDE

80 mm
HOLE SPACING

LIFT & SLIDE 01 / 01

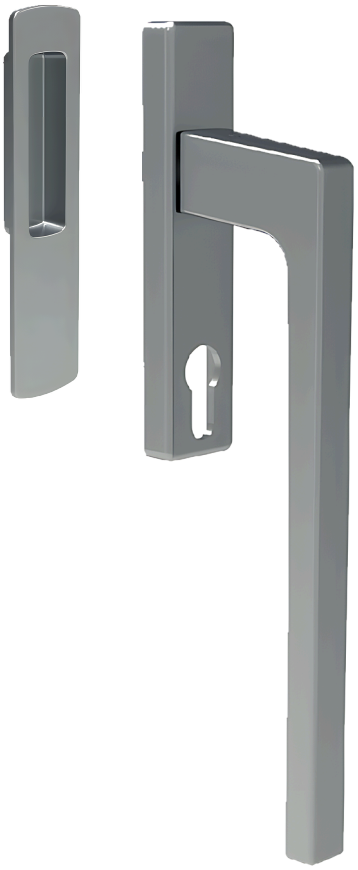

152.2 mm PLATE | **80** mm DRILLING | **74** mm HANDLE

TECHNICAL DRAWING

DRILLING TEMPLATE · mm

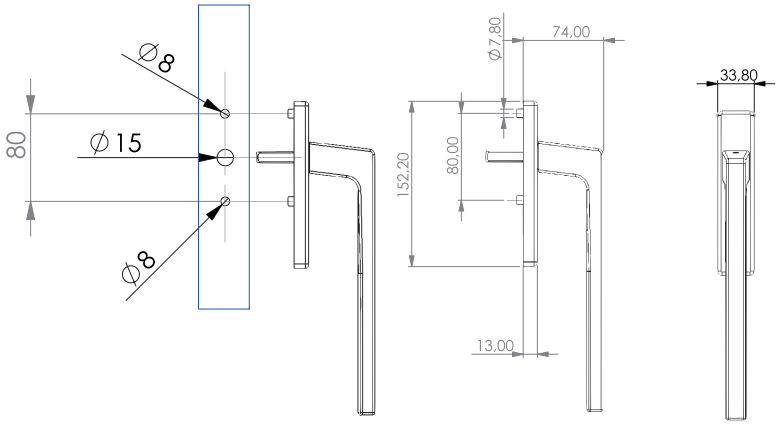

SPINDLE HOLE	SCREW HOLE	SQUARE SPINDLE
Ø15 mm	Ø8 mm	10 mm

INSTALLATION

CYLINDER INNER HANDLE + OUTER PULL

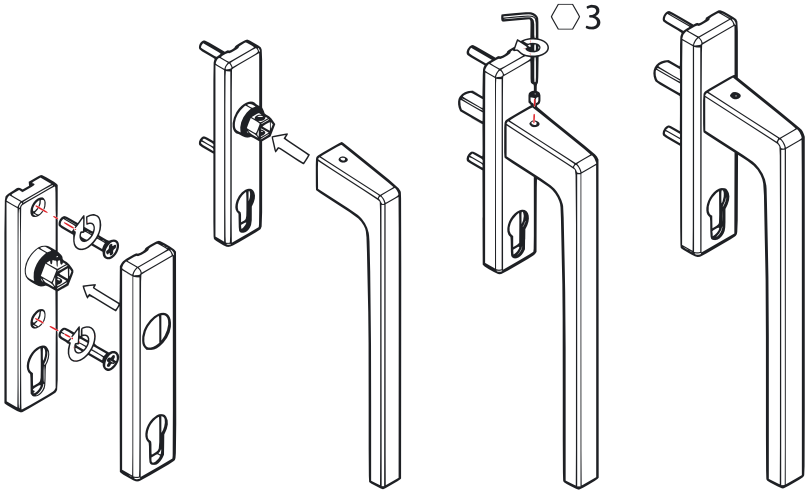

Dimensions in mm · 3 mm Allen key

304 | CE | ift | TSE

LIFT & SLIDE

NOVUS LIFT & SLIDE

80 mm
HOLE SPACING

LIFT & SLIDE 01 / 01

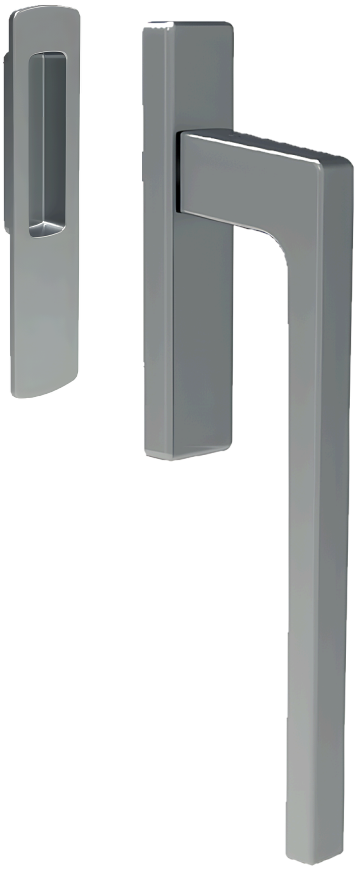

152.2 mm PLATE | **80** mm DRILLING | **74** mm HANDLE

TECHNICAL DRAWING

DRILLING TEMPLATE · mm

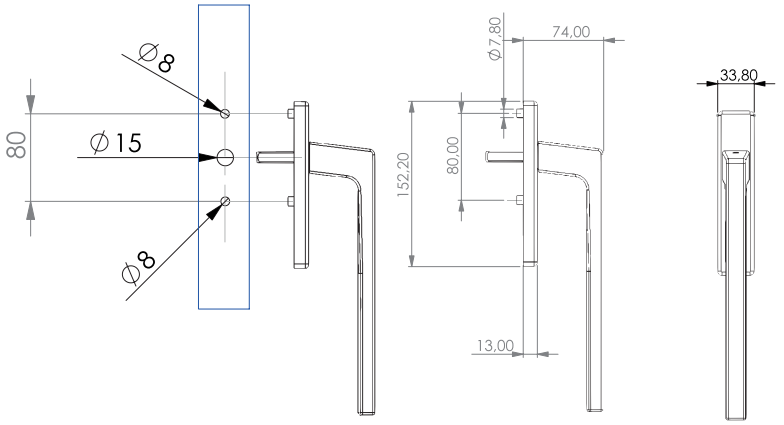

SPINDLE HOLE	SCREW HOLE	SQUARE SPINDLE
Ø15 mm	Ø8 mm	10 mm

INSTALLATION

INNER HANDLE + OUTER FLUSH PULL

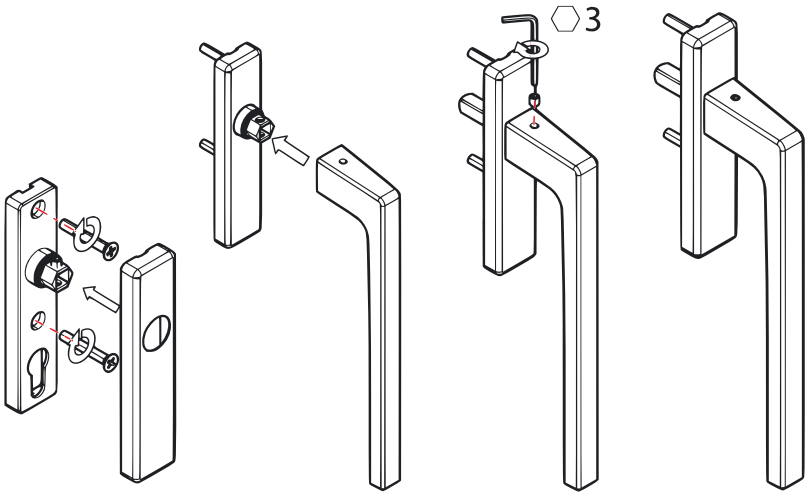

Dimensions in mm · 3 mm Allen key

304 | CE | ift | TSE

PROFILE MACHINING

MACHINING DIMENSIONS

80 mm
SCREW SPACING

HANDLE DRILLING TEMPLATE

SASH PROFILE · mm

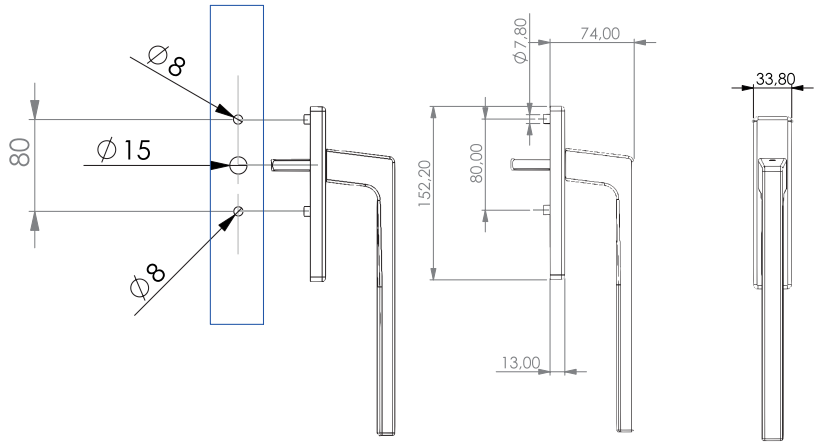

SPINDLE HOLE
Ø15 mm

SCREW HOLE
Ø8 mm

SCREW SPACING
80 mm

ESPAGNOLETTE POCKET

BACKSET

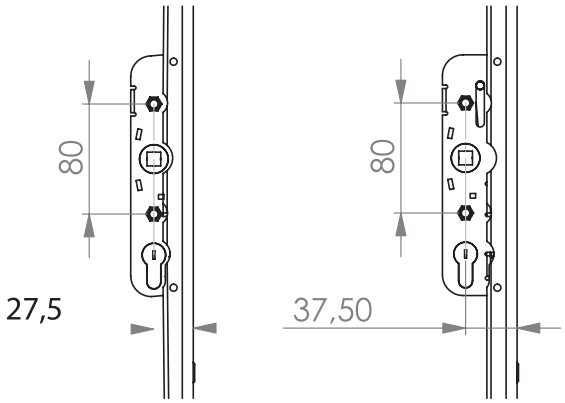

STOPPER CONNECTION

FRAME PROFILE

HOLE DIAMETER
Ø13 / Ø5 mm

HOLE SPACING
20 mm

- See p. 96 for the stopper installation detail.
- The backset (27.5 / 37.5 mm) is chosen according to the profile system and specified when ordering.

MACHINING SUMMARY

mm

OPERATION	DIMENSION	PROFILE	SEE PAGE
Handle spindle hole	Ø15	Sash	103
Handle screw holes	Ø8 · 80 spacing	Sash	103
Stopper holes	Ø13 / Ø5 · 20 spacing	Frame	100

Dimensions in mm

304 CE ift TSE

INFORMATION

USE AND MAINTENANCE

USE — FROM INSIDE

01 Opening
Turn the handle fully through 180°. The sash lifts off the gaskets onto its carriages.

02 Sliding
Slide the sash by holding the handle or grip. Move it without forcing and without striking the stopper.

03 Closing
Bring the sash to the closed position and turn the handle back to its starting position. The sash lowers into place and locks against the gaskets.

MAINTENANCE — RECOMMENDED

- **Rail and channel:** Regularly clean the bottom rail and channel of dust, sand and debris.
- **Moving parts:** Lubricate the espagnolette, locking points and carriage rollers with acid- and resin-free oil.
- **Surfaces:** Use a neutral cleaner and a soft cloth; do not use abrasive or solvent-based products.
- **Fixings:** Check that the handle and lock screws are tight.
- **Adjustment and repair:** Must only be carried out by authorised, trained personnel.

WARNINGS

- Do not turn the handle to the closed position while the sash is open.
- Keep hands clear of the gap between sash and frame while the sash is moving.
- Do not hang extra loads on the sash; do not remove the stoppers.
- Do not let children use the sash unsupervised.

MAINTENANCE INTERVALS — RECOMMENDED

OPERATION	FREQUENCY
Rail and channel cleaning	Every 3 months
Lubrication of moving parts	At least once a year
Screw and fixing check	At least once a year
Gasket check	At least once a year

IMPORTANT
This information must be passed on to the end user. Regular maintenance directly affects the service life and safe use of the system.

Maintenance intervals are recommended for normal operating conditions

304 CE ift TSE

PRODUCT CODES

ORDER LIST

23
PRODUCT

PRODUCT	DESCRIPTION	PAGE
Carriage set 200 kg · 30 mm channel	Corner-driven front + rear carriage	90
Carriage set 300 kg · 30 mm channel	Corner-driven front + rear carriage	90
Carriage set 400 kg · 30 mm channel	Corner-driven front + rear carriage	90
Carriage set · 42 mm channel	300–400 kg sashes	91
Carriage set 200 kg · 16/18/22	For channel profiles	93
Carriage set 300 kg · 16/18/22	For channel profiles	94
Carriage set 400 kg · 16/18/22	For channel profiles	95
Espagnolette L 1800	Handle height 440 mm	97
Espagnolette L 2100	Handle height 957 mm	97
Espagnolette L 2400	Handle height 957 mm	97
Espagnolette L 2700	Handle height 957 mm	97
Stopper	Sash stop	101
Filler cap	Espagnolette filler cap	101
Bar support	Bottom connecting bar support	101
Locking point · sliding	Sliding sash	101
Micro-ventilation	Locking point	101
Locking point · fixed	Fixed sash	101
Connecting bar 900 mm	Short	88
Connecting bar 1400 mm	Medium	88
Connecting bar 1900 mm	Long	88
Bossy sliding flush pull	150 mm	102
Novus lift & slide handle	80 mm hole spacing	103
Novus lift & slide handle set	Inner handle + outer flush pull	104

TO BE SPECIFIED WHEN ORDERING

- Channel type (30 × 22 / 42 × 22 mm / 16 · 18 · 22 profile) and sash weight
- Espagnolette length to suit sash height and backset (27.5 / 37.5 mm)
- Opening scheme and opening direction of the sliding sash (right / left), colour / finish

Dimensions in mm

304 CE ift TSE

06 · DOOR LOCKS

06 DOOR LOCKS

MULTIPOINT · HOOK **NEW · 2027**

ALUMINIUM DOORS

A handle-operated main lock with top and bottom auxiliary locks secures the leaf to the frame at several points. Secured with a cylinder; used with a 22 mm U or flat faceplate.

3 points	2170 mm	35 · 92 mm
locking	faceplate length	backset · centres

CONTENTS

System overview 111
Selection table 112
Twin-pin hook lock 113
Hook main lock 114
Single-point lock set 115
Rod-driven single-point 116
Hook-pin 3-point 117
Twin-pin 3-point 118
Rod-driven · door profi... 119
Hook 3-point lock 120
Keepers and accessori... 121
Ordering information 122

DOOR LOCKS · SYSTEM **NEW · 2027**

SYSTEM OVERVIEW

8
products · pp. 113–120

Bossy multipoint door locks consist of a main lock, additional locking points and frame keepers. All points work together on a single faceplate; they are operated by the handle and locked with the cylinder.

- Handle-operated · cylinder locking
- Hook, pin, mushroom and latch locking elements
- Faceplate 22 mm · U or flat

3 points locking

35 · 92 backset · centres

2170 mm faceplate length

1020 mm handle height

PARTS MAP

lock left · hinges right

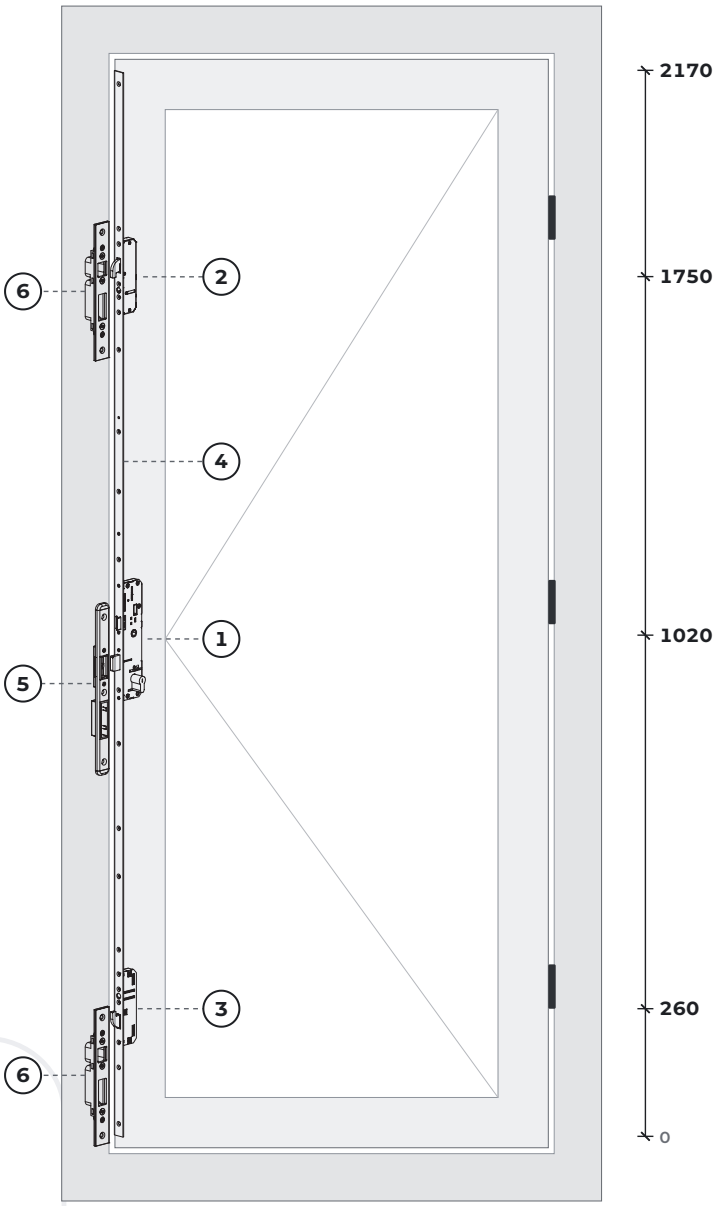

PARTS

1 leaf

No	Part	Element
1	Main lock	latch · cylinder
2	Top locking point	hook / pin
3	Bottom locking point	hook / pin
4	Faceplate	22 mm · U / flat
5	Main lock keeper	frame
6	Locking point keeper	frame

FRAME SIDE
5 · 6 · keepers

LEAF SIDE
1 · 2 · 3 · 4 · faceplate

LOCKING ELEMENTS

drawings not to scale

HOOK
Hooks into the frame keeper



HOOK + PIN
Pins clamp into the keeper

MAIN LOCK · LATCH
Handle-operated · cylinder

ROD-DRIVEN
Operates the mushroom points

Dimensions in mm · heights from the bottom end of the faceplate

CE TSE

DOOR LOCKS · SELECTION NEW · 2027

SELECTION TABLE

8
products

PRODUCT SELECTION

drawings not to scale

Twin-pin hook lock
3-point · hook + 2 pins



Hook main lock
3-point · latch + hook + 2 pins



Single-point lock set
1-point · latch + bolt



Rod-driven single-point
1-point + mushroom · rod



Hook-pin 3-point
3-point · hook + pin



Twin-pin 3-point
3-point · hook + 2 pins

Rod-driven · door profile
1-point + mushroom · rod



Hook 3-point
3-point · hook

COMPARISON

D: backset · faceplate 22 mm U / flat on all products

Product	Points	Locking element	Drive	D · centres	Page
Twin-pin hook lock	3	Hook + 2 pins	Handle	35 · 92	113
Hook main lock	3	Latch + hook + 2 pins	Handle	35 · 92	114
Single-point lock set	1	Latch + bolt	Handle	—	115
Rod-driven single-point	1+mushroom	Latch + mushroom	Handle + rod	—	116
Hook-pin 3-point	3	Hook + pin	Handle	—	117
Twin-pin 3-point	3	Hook + 2 pins	Handle	—	118
Rod-driven · door profile	1+mushroom	Latch + mushroom	Handle + rod	—	119
Hook 3-point	3	Hook	—	—	120

POINT HEIGHTS

3-point locks · from bottom end of faceplate, mm

260
bottom hook

1020
handle · main lock

1750
top hook

2170
faceplate length

— for marked values, please consult our technical support team

CE TSE

HOOK DOOR LOCK · 3-POINT **NEW · 2027**

TWIN-PIN HOOK LOCK

2170
faceplate length, mm

Handle-operated 3-point door lock. The main lock and the top and bottom auxiliary locks work together on a single faceplate; each auxiliary lock has one hook and two pins. Locked with a cylinder.

3 points locking

35 · 92 backset · centres

- Handle-operated locking
- Auxiliary lock: hook + twin pins · top and bottom
- Cylinder locking · 92 centres
- Faceplate 22 mm · U or flat

TECHNICAL DRAWING

dimensions in mm

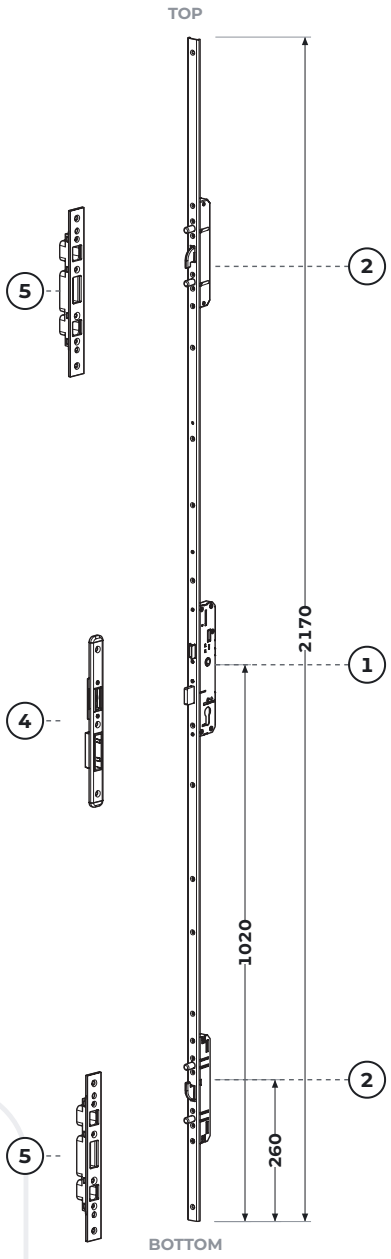

AUXILIARY LOCK · HOOK + TWIN PINS (2)

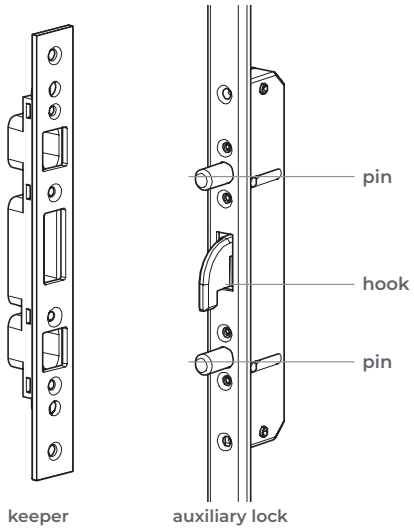

PARTS

1 leaf

No	Part	Qty
1	Main lock · handle-operated	1
2	Aux. lock · hook + twin pins	2
3	Faceplate · 22 mm U / flat	1
4	Main lock keeper	1
5	Hook/pin keeper	2

DIMENSIONS

mm

Backset (D)	**35**	Handle · from bottom	**1020**
Centres · handle – cylinder	**92**	Bottom hook · from bottom	**260**
Cylinder	**Euro**	Top hook · from bottom	**1750**
Faceplate · 22 mm	**U / flat**	Hook · pin projection	**20**
Faceplate length	**2170**	Locking point	**3**

Dimensions in mm · heights from the bottom end of the faceplate

CE TSE

HOOK DOOR LOCK · HANDLE-OPERATED **NEW · 2027**

HOOK MAIN LOCK

35 · 92
backset · centres, mm

Handle-operated main lock; the latch, deadbolt and top–bottom hook + twin-pin auxiliary locks work together on a single faceplate. Locked with a cylinder. Faceplate 22 mm, U or flat.

2170 mm
faceplate length

22 mm
faceplate · U / flat

- Handle-operated locking
- Main lock: latch + deadbolt
- Auxiliary lock: hook + twin pins · top and bottom
- Cylinder locking · 92 centres

TECHNICAL DRAWING

dimensions in mm

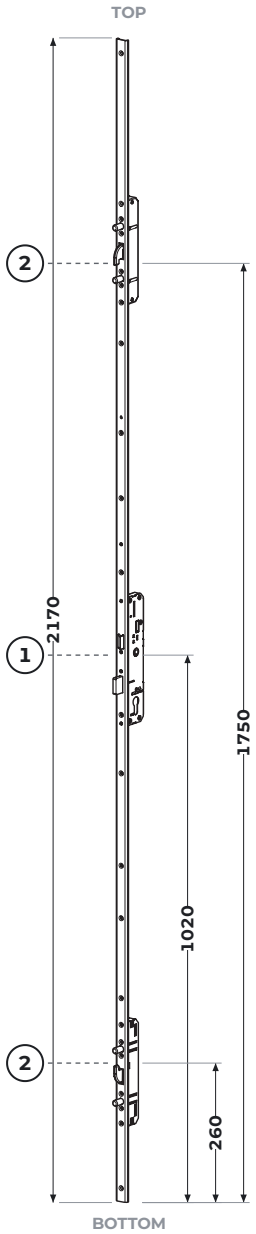

MAIN LOCK · HANDLE-OPERATED (1)

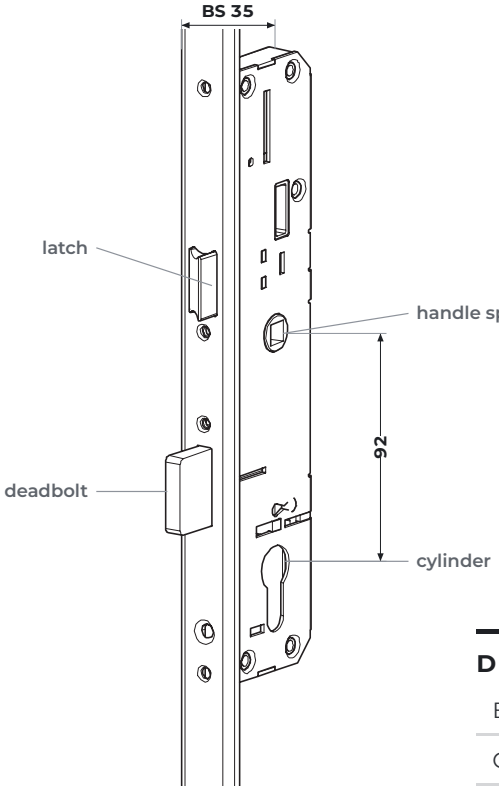

AUXILIARY LOCK · HOOK + TWIN PINS (2)

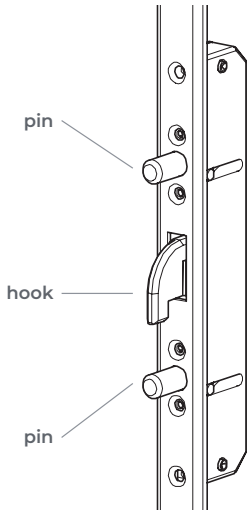

DIMENSIONS

	mm
Backset (D)	**35**
Centres · handle – cylinder	**92**
Cylinder	**Euro**
Faceplate · 22 mm	**U / flat**
Faceplate length	**2170**
Handle · from bottom	**1020**
Hook · pin projection	**20**
Deadbolt projection	**20**
Latch projection	**10**

Dimensions in mm · handle height from the bottom end of the faceplate

CE TSE

DOOR SOLUTIONS · SINGLE-POINT NEW · 2027

SINGLE-POINT LOCK SET

Single-point lock mechanism; a set made up of lock body, keeper, door handle on rose and cylinder escutcheon. Used with a flat or U faceplate, 22 mm wide.

22
faceplate width, mm

4 parts
set contents

PZ
cylinder housing

ASSEMBLY DIAGRAM

not to scale

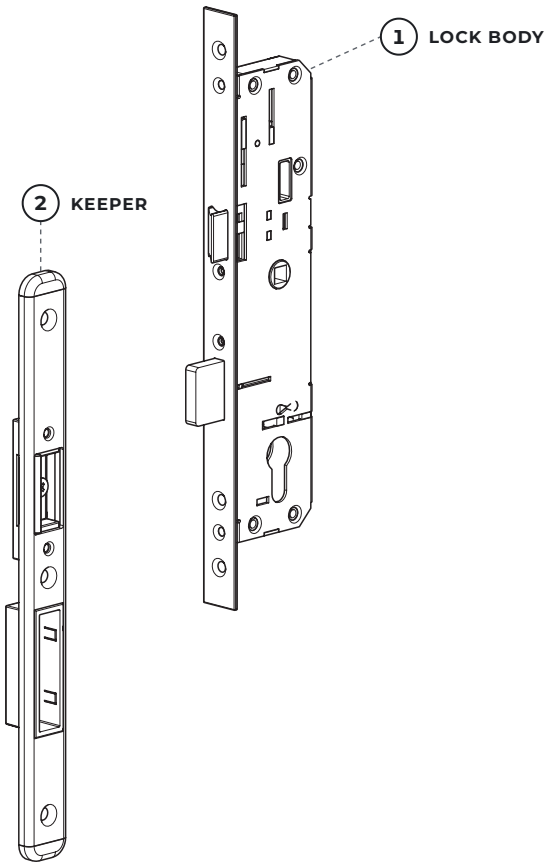

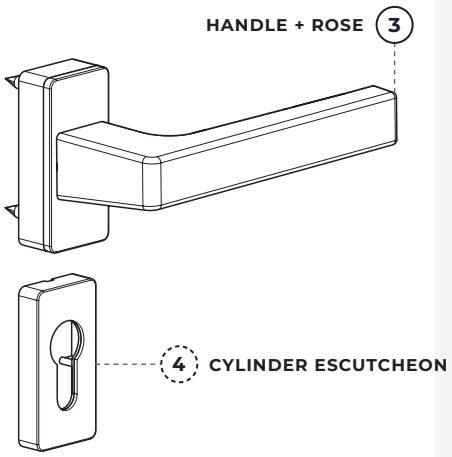

INSTALLATION POSITION

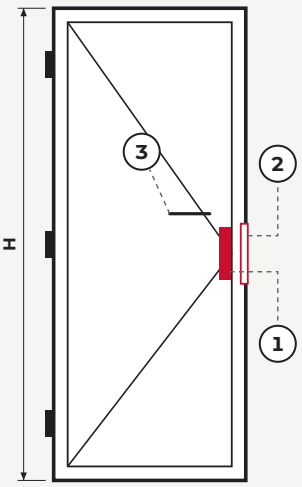

DIN left · inward opening

Lock body · leaf
Keeper · frame
Door handle

FACEPLATE OPTIONS

mm

FLAT FACEPLATE



U FACEPLATE



PARTS LIST

set

No	Part	Qty
1	Single-point lock body · latch + bolt	1
2	Keeper	1
3	Door handle · on rose	1 set
4	Cylinder escutcheon · PZ	1 set

Dimensions in mm · faceplate width 22 mm

DOOR SOLUTIONS · SINGLE-POINT NEW · 2027

ROD-DRIVEN SINGLE-POINT LOCK

Via the rods and corner drives, the lock body operates the mushroom locking points around the leaf. Keepers are on the frame side and 3 hinges on the hinge side.

8 parts
set contents

PZ
cylinder housing

ASSEMBLY DIAGRAM

lock left · hinges right

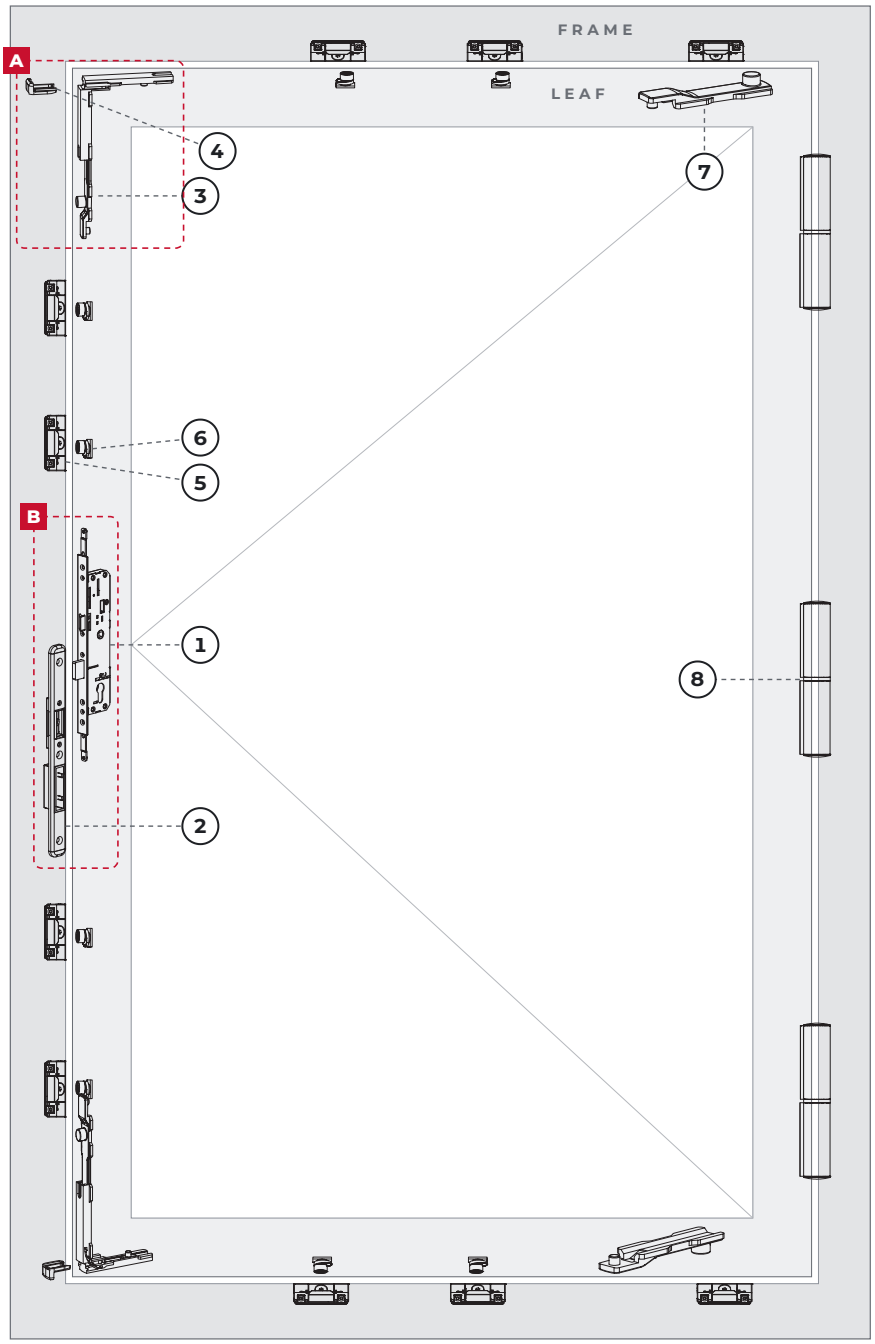

PARTS LIST

1 leaf

No	Part	Qty
1	Lock body · rods	1
2	Keeper	1
3	Corner drive	2
4	Corner keeper	2
5	Pin keeper	10
6	Mushroom pin	8
7	Pin locking bar	2
8	Hinge	3

A CORNER



B LOCK

FRAME
2 · 5

LEAF
1 · 3 · 4 · 6 · 7

- Via the rods and corner drives, the lock body operates the mushroom points around the leaf.
- There are 3 hinges on the hinge side.
- Faceplate 22 mm · U or flat.

DOOR SOLUTIONS · HANDLE-OPERATED **NEW · 2027**

HOOK-PIN 3-POINT LOCK

Handle-operated multipoint door lock; the main lock and the top and bottom hook-pin locking points work together on a single faceplate.

3 points
locking

PZ
cylinder housing

ASSEMBLY DIAGRAM

lock left · hinges right

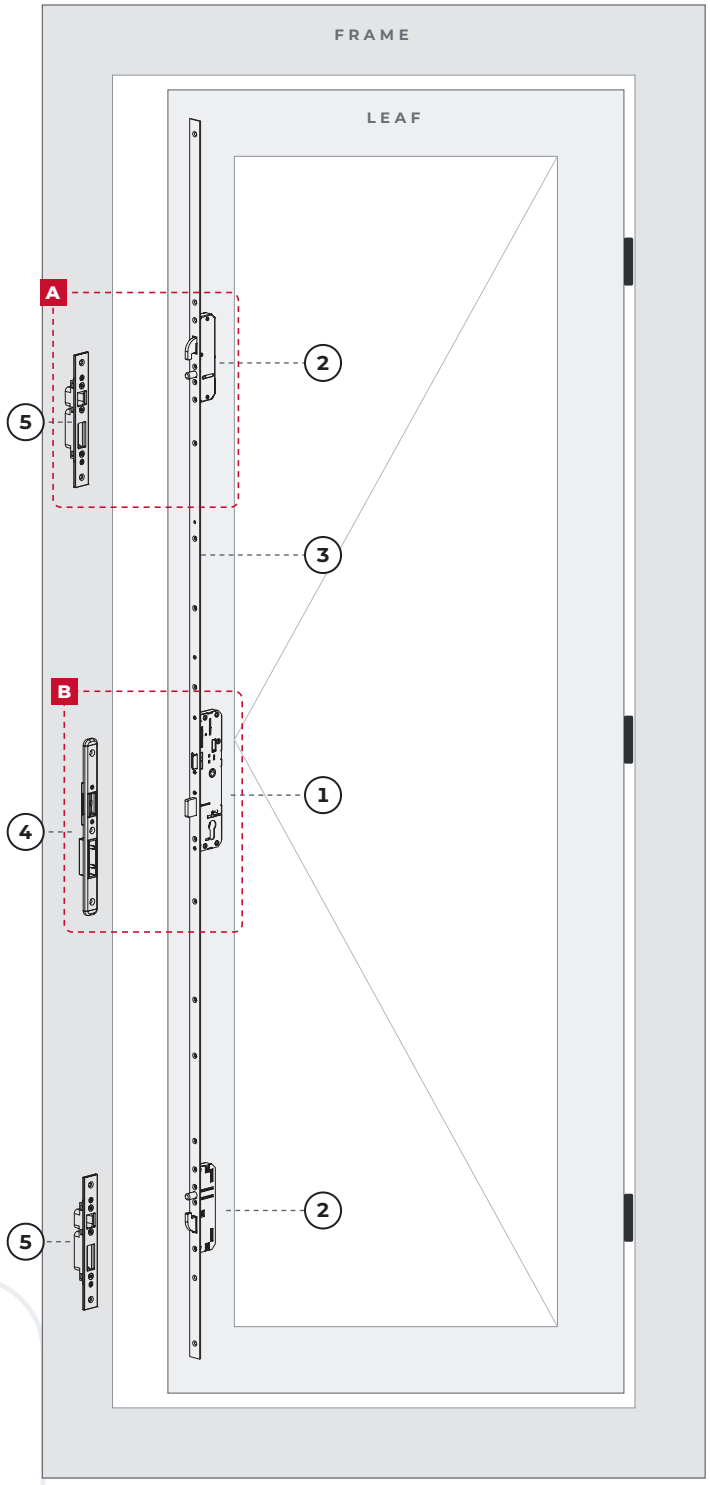

PARTS LIST

1 leaf

No	Part	Qty
1	Main lock body · handle-operated	1
2	Hook-pin locking point	2
3	Faceplate · 22 mm U / flat	1
4	Main lock	1

A HOOK + PIN



B MAIN LOCK

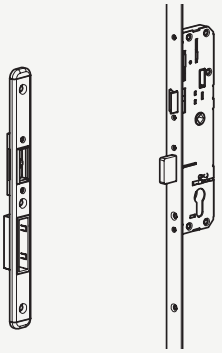

FRAME SIDE
4 · 5

LEAF SIDE
1 · 2 · 3

- When the handle is lowered, the hooks and pins lock into the frame keepers.
- 3 locking points: top hook + pin, main lock, bottom hook + pin.

DOOR SOLUTIONS · HANDLE-OPERATED NEW · 2027

TWIN-PIN 3-POINT LOCK

Handle-operated multipoint door lock; the main lock and the top and bottom hook + twin-pin locking points work together on a single faceplate.

3 points
locking

PZ
cylinder housing

ASSEMBLY DIAGRAM

lock left · hinges right

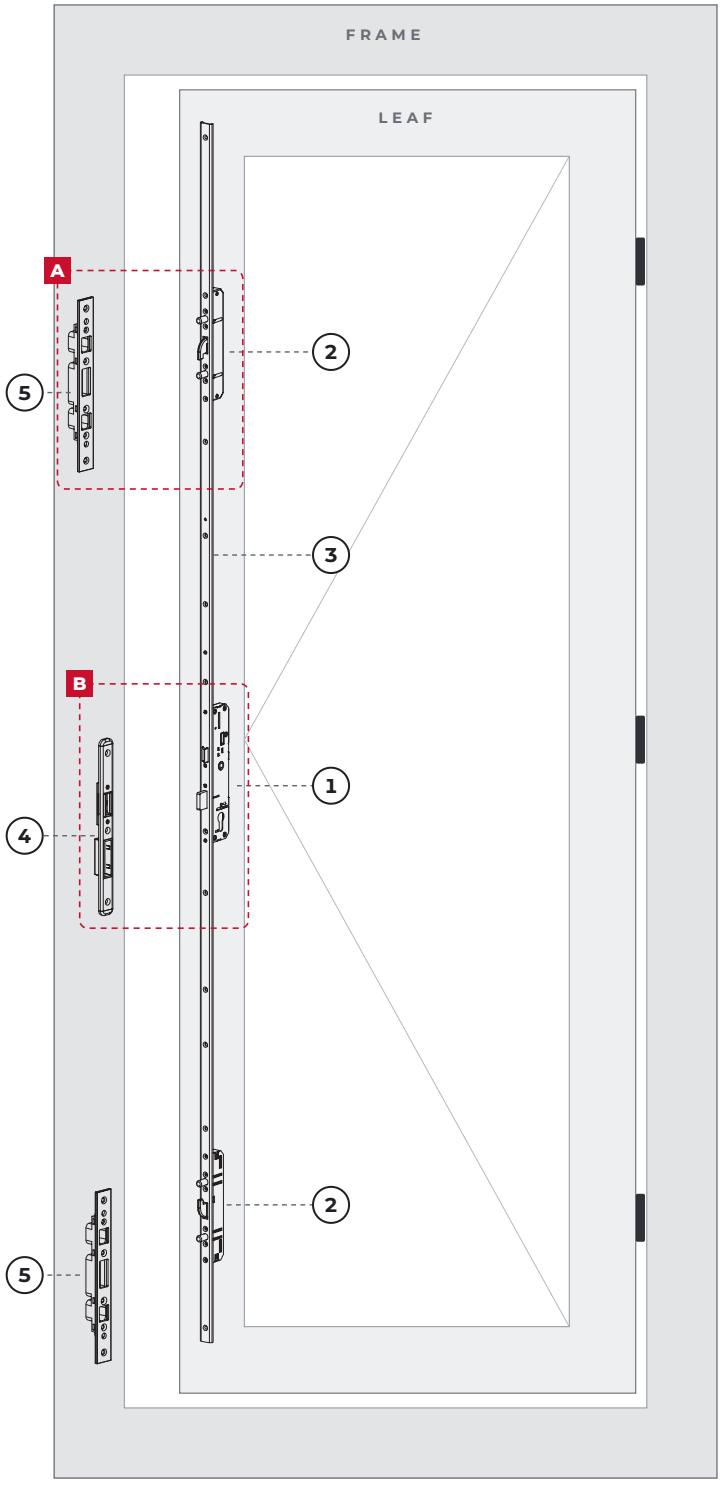

PARTS LIST

1 leaf

No	Part	Qty
1	Main lock body · handle-operated	1
2	Hook · twin-pin locking point	2
3	Faceplate · 22 mm U / flat	1

A HOOK + 2 PINS



B MAIN LOCK

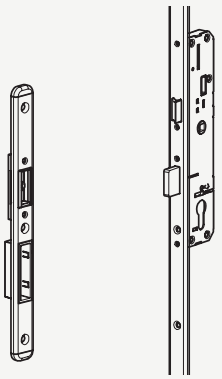

FRAME SIDE
4 · 5

LEAF SIDE
1 · 2 · 3

— When the handle is lowered, the hooks and pins lock into the frame keepers.

— 3 locking points: top hook + 2 pins, main lock, bottom hook + 2 pins.

DOOR SOLUTIONS · SINGLE-POINT NEW · 2027

ROD-DRIVEN SINGLE-POINT LOCK

Rod-driven single-point lock; with the lock body, rod end pieces and mushroom locking points, it secures the leaf to the frame on both the lock and hinge sides.

6 parts
set contents

PZ
cylinder housing

ASSEMBLY DIAGRAM

lock left · hinges right

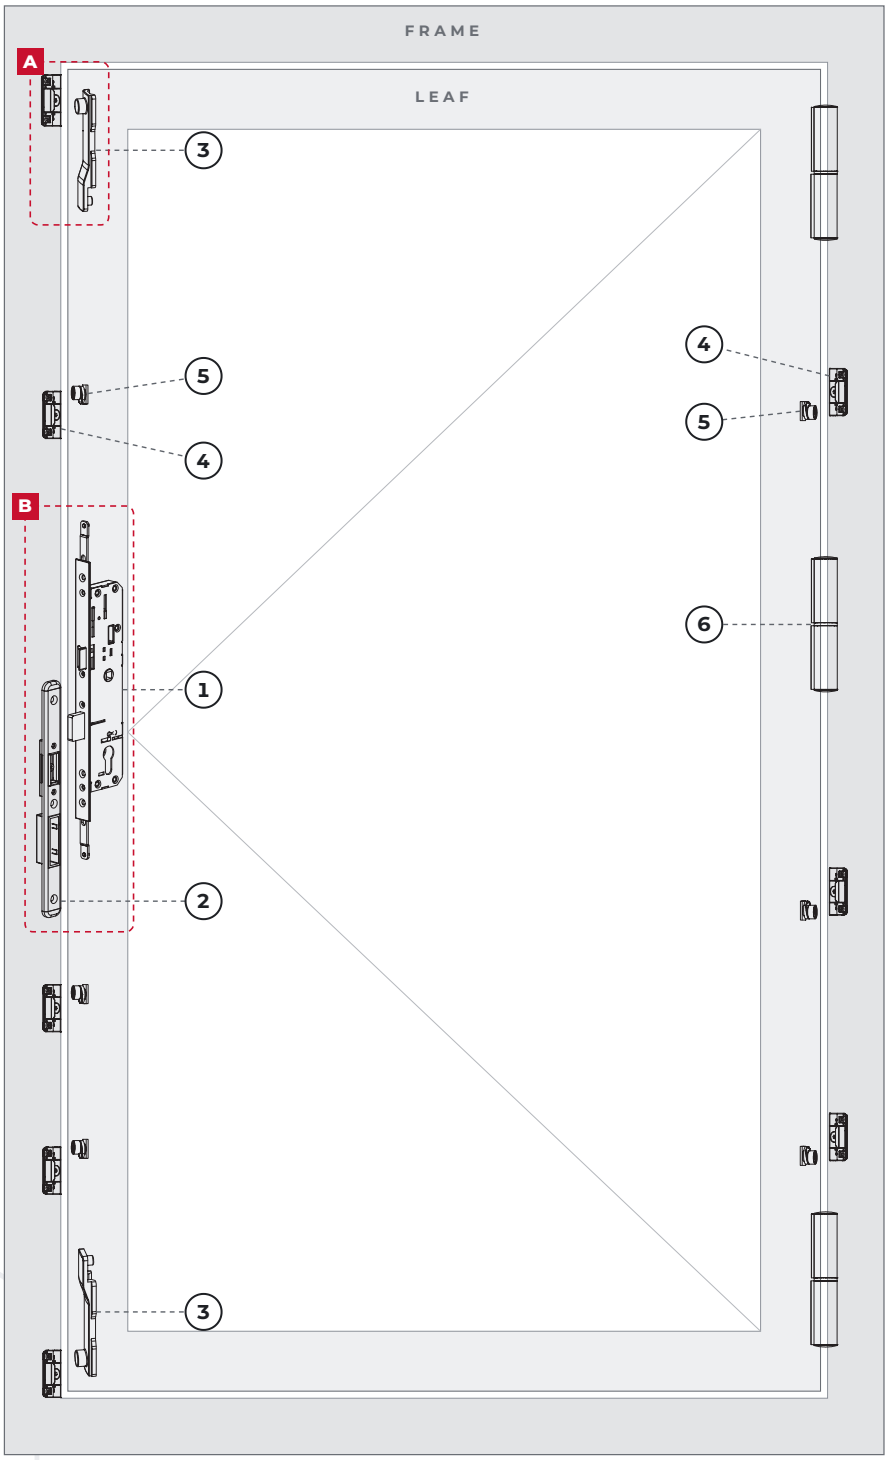

PARTS LIST

1 leaf

No	Part	Qty
1	Lock body · rods	1
2	Keeper	1
3	Rod end piece	2
4	Pin keeper	8
5	Mushroom	6

A ROD END



B LOCK

FRAME
2 · 4

LEAF
1 · 3 · 5

- The lock body operates the top and bottom end pieces via the rods.
- There are 3 mushroom pins and keepers on the hinge side.
- Faceplate 22 mm · U or flat.

DOOR SOLUTIONS · MULTIPOINT **NEW · 2027**

HOOK 3-POINT LOCK

Hook 3-point lock mechanism; the main lock and the top and bottom hook locking points work together on a single faceplate.

3 points locking

2 hook top + bottom

- Main lock + top and bottom hook locking points
- Faceplate 22 mm · U or flat
- Main lock and hook keepers on the frame side

ASSEMBLY DIAGRAM

lock left · hinges right

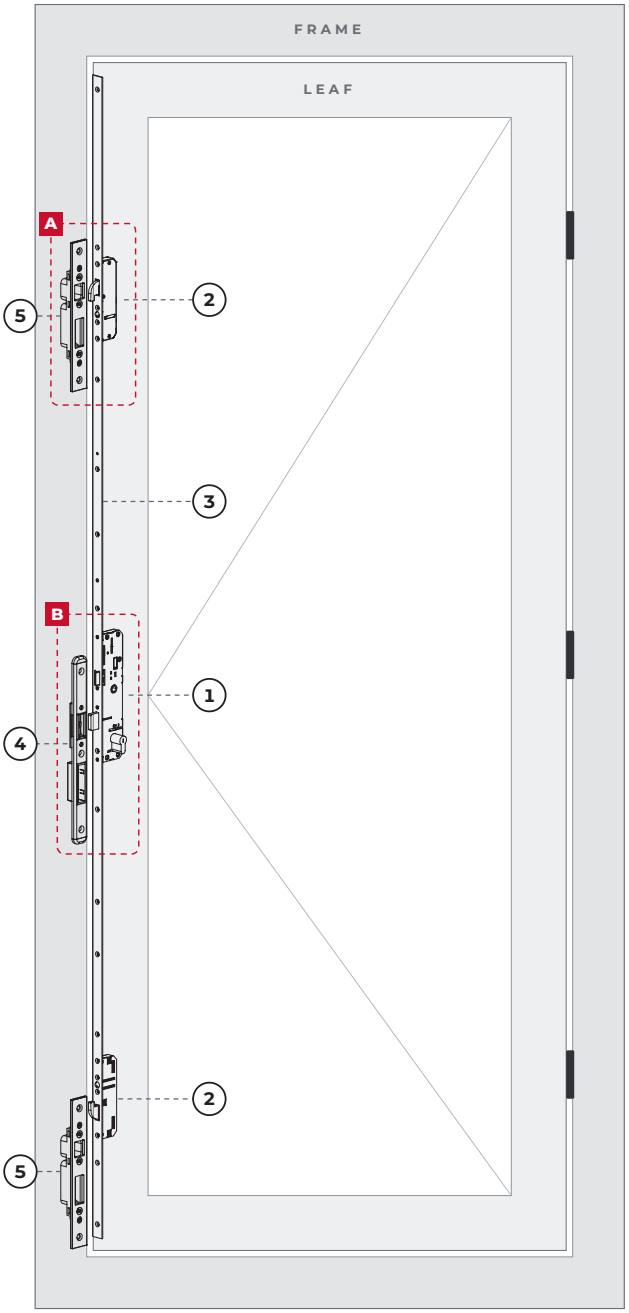

Dimensions in mm · drawing not to scale

PARTS LIST

1 leaf

No	Part	Qty
1	Main lock body	1
2	Hook locking point	2
3	Faceplate · 22 mm U / flat	1
4	Main lock keeper	1
5	Hook keeper	2

DETAILS

drawings not to scale

A HOOK

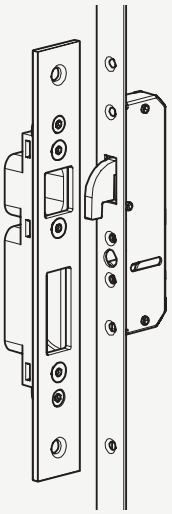

B MAIN LOCK



FRAME SIDE
4 · 5 · keepers

LEAF SIDE
1 · 2 · 3 · faceplate

- Keepers are fitted to the inner edge of the frame, the faceplate to the leaf edge.

CE TSE

DOOR LOCKS · ACCESSORIES NEW · 2027

KEEPERS AND ACCESSORIES

6
keeper types

KEEPER TYPES

frame side · drawings not to scale

Main lock keeper
3-point locks

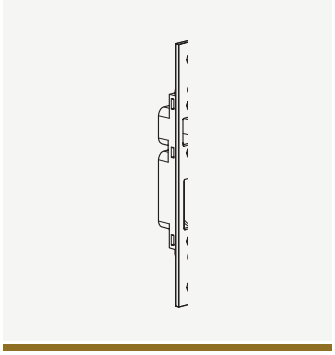

Hook keeper
hook 3-point

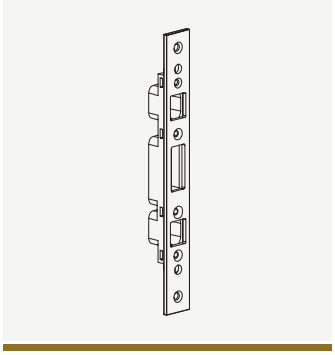

Hook/pin keeper
twin-pin locks

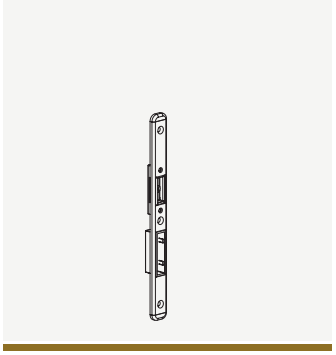

Lock keeper
single-point lock set

KEEPERS

qty / leaf

Keeper	Used with	Qty	Product code
Main lock keeper	3-point locks · main lock	1	—
Hook keeper	Hook / hook-pin 3-point	2	—
Hook/pin keeper	Twin-pin locks	2	—
Lock keeper	Single-point / rod-driven	1	—
Corner keeper	Rod-driven single-point	2	—
Mushroom keeper	Rod-driven sets	8 – 10	—

ACCESSORIES

not in set / compatible parts

Cylinder
Euro profile · PZ · 92 centres

Door handle
door handle with rose · p. 81

Faceplate
22 mm · U or flat

Hinge
3 per rod-driven set

Mushroom pin
rod-driven · 6 – 8 pcs

Rod · corner drive
rod-driven sets

COMPATIBILITY

- Keepers are fitted to the inner edge of the frame, the faceplate to the leaf edge.
- The keeper type is selected according to the locking element (hook, pin, mushroom) and the frame profile section; the cylinder length is selected according to door thickness.
- Keepers can be ordered with the set or separately as spare parts.

— for marked values, please consult our technical support team

CE TSE

DOOR LOCKS · ORDERING NEW · 2027

ORDER INFORMATION

8 sets

SET CONTENTS

product code and packaging

Product	Set contents	Page	Product code	Packaging
Twin-pin hook lock 3-point · hook + 2 pins	Main lock · 2 auxiliary locks · faceplate · keepers	113	—	—
Hook main lock 3-point · latch + hook + 2 pins	Main lock · auxiliary locks · faceplate	114	—	—
Single-point lock set 1-point · latch + bolt	Body · keeper · handle · cylinder escutcheon	115	—	—
Rod-driven single-point 1-point + mushroom · rod	8 parts · incl. 3 hinges	116	—	—
Hook-pin 3-point 3-point · hook + pin	Main lock · 2 points · faceplate · keepers	117	—	—
Twin-pin 3-point 3-point · hook + 2 pins	Main lock · 2 points · faceplate · keepers	118	—	—
Rod-driven · door profile 1-point + mushroom · rod	6 parts · incl. 3 hinges	119	—	—
Hook 3-point 3-point · hook	Main lock · 2 points · faceplate · keepers	120	—	—

ORDER CHECKLIST

- ☐ **Lock type** — number of points · element
- ☐ **Backset · centres** — 35 · 92 mm
- ☐ **Faceplate** — U / flat · 22 mm
- ☐ **Faceplate length** — 2170 mm
- ☐ **Door handing** — DIN left / right
- ☐ **Cylinder** — PZ · length
- ☐ **Frame profile** — keeper selection
- ☐ **Colour / finish**

ORDER EXAMPLE

SAMPLE LINE

Hook 3-point lock · D 35 · centres 92 · U faceplate 22 · 2170 · DIN left · 10 sets

Specify the frame profile and colour / finish separately.

STANDARDS AND TESTS

Standard	Class / result
EN 15685 · multipoint lock	—
EN 12209 · lock	—
EN 1670 · corrosion	—
EN 1627 · RC class	—

— for marked values, please consult our technical support team

CE TSE

NOTES

NOTES

NOTES

BOSSY®

WINDOW AND DOOR HARDWARE SOLUTIONS

WE PRODUCE CUSTOM SOLUTIONS FOR YOUR NEEDS.

ADDRESS

Dudullu OSB, 2. Cadde No: 8
34775 Ümraniye / Istanbul

PHONE

+90 216 365 42 50

E-MAIL

info@bossy.com.tr

WEB

www.bossy.com.tr

bossy.com.tr · products and technical documents

The technical information in this catalog is for information purposes. Bossy reserves the right to change products and dimensions without prior notice.

© 2026 Bossy · Birikim Kalıp A.Ş. · Edition 01/2026

CE ift TSE