



**HARAMAYA UNIVERSITY**  
**HARAMAYA INSTITUTE OF TECHNOLOGY**  
**SCHOOL OF ELECTRICAL AND COMPUTER ENGINEERING**  
**COMPUTER ENGINEERING STREAM**

A project submitted to the School of Under Graduate Studies in partial fulfillment  
of the requirements for the degree of Bachelor of Science

**Student dormitory Smoke and fire detecting System**

**By**

1. Leikun Tadesse..... 2247/12
2. Gemechu Nuru... .. 1967/12
3. Seyid Tiyoshe ..... 2763/12
4. Ermias Fikru ..... 1832/12

**Advisor:** Dr. Mohammad Firoz Alam Khan

**Haramaya, Ethiopia**  
**May, 2024**

## DECLARATION

In embarking upon the creation of the BSc thesis titled "*Student Dormitory Smoke and Fire Detecting System*" we, the members of our group, collectively assert the originality and integrity of our work. This declaration stands as a testament to the conscientious efforts and rigorous work that have culminated in the development of this proposal. At the heart of our declaration lies the firm conviction that every facet of the proposal, from the minutest detail to the overarching framework, is the product of our collective endeavor. We affirm with unwavering certainty that the information, data, and findings presented within these pages are not only authentic but also the result of diligent research and meticulous analysis. Each reference and source cited herein has been carefully acknowledged, underscoring commitment to academic honesty and integrity.

Members Name	ID No	Signatures
1. Leikun Tadesse.....	2247/12.....	_____
2. Gemechu Nuru.....	1967/12 .....	_____
3. Seyid Tiyoshe.....	2763/12 .....	_____
4. Ermias Fikru.....	1832/12 .....	_____

## APPROVAL

This thesis, titled "Student Dormitory Fire and Smoke Detecting System," is approved for meeting the academic requirements for the degree of Bachelor of Science (BSc) in Electrical and Computer Engineering at **Haramaya University**. The research presented here in is a testament to the author's dedication and hard work in addressing the critical issue of fire safety in student accommodations. The innovative approach to enhancing early detection and response to fire hazards is commendable and contributes significantly to the field of safety engineering. The findings and developments detailed in this thesis hold the potential to improve safety measures, thereby safeguarding lives and property. The approval of this thesis recognizes the scholarly achievement and the practical impact of the proposed system.

**Advisor signature:**

---

**Advisor's Name:**Dr.Mohammad Firoz Alam Khan**Advisor's Title:**Associate Professor**Date:**May 17, 2024**Dean Signature:**

---

**Department Head:**Wehib Abubeker(MSc)**Date:**May 19, 2024

## ABSTRACT

This thesis details the design and implementation of a comprehensive smoke and fire detection system for student dormitories utilizing Cisco Packet Tracer IoT technology. Advanced smoke and fire detectors are strategically installed throughout dormitory buildings, interconnected via a home gateway to a centralized management system. This system enables real-time monitoring and control functionalities accessible through smartphones and switches. The primary aim of this approach is to enhance the safety and responsiveness of fire emergency systems within student living environments, mitigating potential risks and ensuring prompt action in the event of fire incidents. Leveraging the capabilities of IoT technology, this innovative system addresses critical concern related to fire detection and emergency management, thereby fostering a safer and more secure living environment for dormitory residents.

## ACKNOWLEDGMENT

We would like to express our deepest gratitude to the Almighty God, whose guidance and blessing have illuminated our path throughout the journey of this project. His unwavering support has been the cornerstone of our perseverance and success.

We extend our sincerest appreciation to our thesis advisor, **Dr. Mohammad Firoz Alam Khan** whose invaluable guidance, mentorship, and unwavering encouragement have been instrumental in shaping our understanding and approach towards this project. We are profoundly thankful to our families for their unconditional love, unwavering support, and understanding during the course of this endeavor. Their patience, encouragement, and sacrifices have been the driving force behind our pursuit of knowledge and academic achievement. We would also like to express our gratitude to School of Electrical and Computer Engineering in Haramaya University who provided assistance, resources, or support during the course of the project.

Lastly, we would like to express our gratitude to all those who have contributed, directly or indirectly, to the completion of this thesis. Your support and encouragement have been invaluable, and we are deeply grateful for your unwavering belief in our abilities.

With heartfelt appreciation!

## LIST OF ACRONYM

**ACL:** Access Control List

**CO:** Carbon Monoxide.

**HTTPS:** Hypertext Transfer Protocol Secure

**I oT:** Internet of Things

**IP:** Internet Protocol

**IR:** Infrared

**LAN:** Local Area Network

**LED:** Light Emitting Diode

**UI:** User Interface

**UV:** Ultraviolet

**Wi-Fi:** Wireless Fidelity

**WLAN:** Wireless Local Area Network

## Contents

DECLARATION .....	i
APPROVAL .....	ii
ABSTRACT.....	iii
ACKNOWLEDGMENT.....	iv
LIST OF ACRONYM.....	v
LIST OF FIGURE.....	x
LIST OF TABLE .....	xi
CHAPTER 1 .....	1
INTRODUCTION .....	1
1.1 Background .....	1
1.2 Problem Statement .....	2
1.3 Objectives .....	2
1.4 Scope of the Project .....	3
1.5 Significance of the Study. ....	3
CHAPTER 2 .....	5
LITERATURE REVIEW .....	5
2.1 Existing Fire Detection Systems. ....	5
2.1.1 Traditional Fire Detection Systems.....	5
2.1.2 Modern Fire Detection Systems.....	6
2.2 IoT- Based Fire Detection Systems. ....	6
2.2.1 IOT Related Projects. ....	7
2.2.2 Advantages of IoT-Based Fire Detection Systems.....	9
2.2.3 Limitations and Challenges.....	9
2.3 Cisco Packet Tracer .....	9
CHAPTER 3 .....	11
METHOD AND DESIGN .....	11

---

3.1 Introduction.....	11
3.2 System Requirements.....	11
3.2.1 Functional Requirements.....	11
3.2.2 Non-Functional Requirements. ....	11
3.2.3 The use case diagram .....	11
3.2.4 Sequence Diagram: Student Dormitory System Overview .....	13
3.3 System Components.....	16
3.3.1 Smoke and Fire Detector .....	16
3.3.2 Home Gateway.....	17
3.3.3 Smartphone. ....	17
3.3.4 Switch. ....	17
3.3.5 Smart Window. ....	18
3.3.6 Smart Door.....	19
3.3.7 Fire sprinkler. ....	19
3.3.8 Siren. ....	20
3.3.9 A copper crossover cable. ....	20
3.3.10 IP Address. ....	21
3.3.11 A wireless connection .....	21
3.3.12 Heating Element.....	21
3.4 System Architecture.....	22
3.4.1 Overall Architecture.....	22
3.4.2 Data Flow and Processing.....	22
3.5 Technological Advancements. ....	23
3.5.1 IoT and Smart Technologies. ....	23
3.5.2 Advanced Sensors. ....	23
CHAPTER 4 .....	24
IMPLEMENTATION.....	24
4.1 System Setup in Cisco Packet Tracer.....	25

---



---

4.1.1 Components and Devices.....	25
4.1.2 Network Topology .....	25
4.1.3 Configuring Smart Devices and Actuators.....	27
4.1.4 Programming Notifications.....	27
4.2 Network Configuration.....	28
4.2.1 IP Addressing and DHCP.....	28
4.2.2 Wireless Configuration.....	28
4.2.3 Conditions For Configuration.....	28
4.3 Simulation and Testing.....	28
4.3.1 Scenario Setup.....	28
4.3.2 Monitoring and Response.....	29
4.3.3 System Optimization.....	30
CHAPTER 5 .....	31
TESTING AND RESULT .....	31
5.1 Test Scenarios.....	31
5.1.1 Smoke Detection Test: .....	31
5.1.2 Integration Test: .....	32
5.1.3 False Alarm Test: .....	32
5.1.4 Emergency Response Test: .....	32
5.2 Performance Metrics .....	32
5.3 Results and Analysis .....	33
5.4 System Benefits .....	34
CHAPTER 6 .....	36
CONCLUSION AND RECOMMENDATION .....	36
6.1 Conclusion.....	36
6.2 Limitations and Challenges.....	36
6.3 Recommendations for Future Research.....	37
APPENDIX.....	40

---

Appendix A: Use Case Diagram Code.....	40
Appendix B: Sequence Diagram Code. ....	42
Appendix C: JavaScript Code. ....	43

## LIST OF FIGURE

Figure 2.1: Heat Detector vs Smoke Detector.....	5
Figure 1.2 : IOT Based Fire Detector.....	7
Figure 2.3: Modern Fire and Smoke detecting system.....	8
Figure 3.1: Use case Diagram of Smoke detector and fire detector system.....	13
Figure 3.2: Student Dormitory Smoke and fire detecting System.....	15
Figure 3.3: Smart Phone.....	17
Figure 3.4: Smart Window.....	18
Figure 3.5: Siren Icon in Cisco Packet Tracer.....	20
Figure 3.6: Straight through Cable.....	20
Figure 3.7 : Heating Element .....	22
Figure 3.8 : Fire and Smoke detector System flow. ....	23
Figure 3.9: Cisco Packet Tracer .....	24
Figure 3.10: Network Design (Before).....	26
Figure3.11: a) Smoke detector configuration b) Fire detector configuration. ....	26
Figure 3.12: Devices connected to smart phone.....	27
Figure 3.13: Condition of our System .....	28
Figure 3.14: Fire/Heat Element Detecting Test.....	29
Figure 3.15: Smoke Detecting Test .....	29

## LIST OF TABLE

Table 5.1 : Smoke Detector Condition.....	31
Table 5.2 : Fire Detection Condition.....	32

# CHAPTER 1

## INTRODUCTION

This thesis presents the design and implementation of a comprehensive smoke and fire detection system tailored for student dormitories, utilizing Cisco Packet Tracer IoT technology. The system features advanced smoke and fire detectors strategically placed throughout the dormitory buildings, all interconnected via a home gateway to a centralized management platform. This setup allows for real-time monitoring and control through smartphones and switches, significantly enhancing the safety and responsiveness of fire emergency systems in student living environments. By leveraging IoT technology, this innovative approach aims to mitigate potential fire risks and ensure prompt emergency responses, thereby fostering a safer and more secure living space for dormitory residents.

### 1.1 Background

Fire safety in student dormitories is a critical issue due to the high density of residents and the potential for significant property and life loss in the event of a fire. Traditional fire detection systems often rely on manual monitoring and individual alarms, which may not provide timely or comprehensive alerts. IoT with regard to fire safety and suppression systems can aid in a lot of different areas for the protection of property and individuals within the buildings. [1]

The safety and security of student dormitories are of paramount importance in ensuring a conducive living environment for students. With the increasing concerns over fire hazards and the potential dangers posed by smoke inhalation, there is a pressing need for effective fire detection systems within these residential spaces. Traditional fire detection systems may not always be feasible or cost-effective for student dormitories, which often operate on limited budgets and resources.

The increasing prevalence of fire incidents in residential settings, particularly in student dormitories, underscores the urgent need for effective fire detection and emergency response systems. Traditional fire safety measures often fall short in providing timely alerts and comprehensive monitoring capabilities. The advent of Internet of Things (IoT) technology presents an opportunity to revolutionize fire safety systems through enhanced connectivity and real-time data processing. Cisco Packet Tracer, a powerful network simulation tool, offers a platform to design and simulate IoT-based fire detection systems.

By integrating advanced smoke and fire detectors with centralized management systems accessible via smartphones and switches, it is possible to create a robust and responsive safety infrastructure. This background highlights the critical necessity for improved fire detection solutions and sets the stage for exploring the potential of IoT technology in safeguarding student dormitories.

## **1.2 Problem Statement**

Current fire detection systems in student dormitories lack integration with modern communication technologies, which can lead to delayed responses and ineffective management during fire emergencies. There is a need for an integrated system that can offer real-time alerts, remote monitoring, and centralized control. The primary problem addressed by this study is the inadequacy of traditional fire detection and response systems in student dormitories, which often lack real-time monitoring, immediate alert mechanisms, and comprehensive coverage. These shortcomings can lead to delayed detection and response during fire incidents, increasing the risk of harm to residents and property damage.

Despite the importance of fire detection systems in student dormitories, many institutions face challenges in implementing robust and reliable solutions. Traditional fire detection systems can be expensive to install and maintain, making them inaccessible for institutions with constrained budgets. Moreover, the complexity of such systems may require specialized training for maintenance and operation, which may not be readily available within the student housing context. Therefore, there is a critical need for an innovative solution that integrates advanced smoke and fire detection technologies with IoT frameworks to ensure timely and effective fire emergency management in student living environments.

## **1.3 Objectives**

### **1.3.1 General Objective**

The general objective of this research is to propose, simulate, and implement a comprehensive smoke and fire detection system specifically designed for student dormitories. This system aims to enhance fire safety standards by leveraging advanced IoT technology, thus reducing the risk of fire-related accidents and ensuring the well-being of dormitory occupants. By integrating real-time monitoring, early detection, and prompt emergency response capabilities, the research seeks to create a robust and reliable fire safety infrastructure that addresses the unique challenges of student living environments. Through this innovative approach, the study aspires to set new benchmarks in dormitory fire safety, significantly improving the protection of residents and property.

### 1.3.2 Specific Objectives.

- ❖ Assess the current state of fire safety measures in student dormitories, including the effectiveness of existing fire detection systems and evacuation protocols.
- ❖ Analyze the common causes and patterns of fire incidents in student dormitories through literature review and case studies.
- ❖ Design a comprehensive smoke and fire detection system specifically tailored for the unique characteristics and challenges of student dormitories.
- ❖ To design and implement a smoke and fire detection system for student dormitories using Cisco Packet Tracer IoT.

### 1.4 Scope of the Project

This project encompasses the design and implementation of an advanced smoke and fire detection system for student dormitories using Cisco Packet Tracer IoT technology. It involves the strategic installation of IoT-enabled smoke and fire detectors throughout dormitory buildings, which are connected to a centralized management system via a home gateway. This system enables real-time monitoring and control through smartphones and switches, aiming to enhance safety and responsiveness to fire emergencies. By leveraging IoT capabilities, the project addresses critical fire detection and emergency management concerns, ultimately creating a safer and more secure living environment for dormitory residents.

The project also encompasses simulating the system to validate its effectiveness, designing an intuitive user interface for remote access, ensuring compliance with fire safety standards, and optimizing the system based on performance evaluations. The ultimate goal is to deliver a robust, scalable, and user-friendly fire detection solution that enhances safety and emergency responsiveness in dormitory environments.

### 1.5 Significance of the Study.

Implementing an advanced fire detection system in student dormitories can significantly enhance safety, providing faster detection and response times, reducing potential damages, and saving lives. The integration with modern technology makes the system user-friendly and accessible for real-time monitoring and control.

The proposed project aims to address these challenges by developing a cost-effective and efficient smoke and fire detecting system specifically tailored for student dormitories.

By leveraging the capabilities of Cisco Packet Tracer, a widely accessible network simulation tool, this project seeks to provide a practical solution that can be easily implemented and maintained by dormitory staff and administrators.

By designing a comprehensive smoke and fire detection system that allows real-time monitoring and control via smartphones and switches, this research addresses critical gaps in traditional fire safety measures. The enhanced responsiveness and early detection capabilities provided by the interconnected sensors can significantly reduce the risk of fire-related incidents, ensuring prompt and effective emergency responses. Furthermore, the use of Cisco Packet Tracer for simulation and testing ensures that the system is both reliable and efficient before actual deployment. This study not only contributes to the safety and well-being of dormitory residents but also sets a precedent for integrating advanced IoT solutions in residential fire safety systems, potentially influencing broader applications and future research in the field.



## CHAPTER 2

### LITERATURE REVIEW

#### 2.1 Existing Fire Detection Systems.

Fire detection systems are critical components in ensuring the safety of residential and commercial buildings. These systems are designed to detect the presence of smoke, fire, or carbon monoxide and provide early warning to occupants, enabling timely evacuation and response. The following sections provide an overview of existing fire detection systems, their components, and their limitations.

##### 2.1.1 Traditional Fire Detection Systems.

###### 2.1.1.1 Smoke Detectors.

Smoke detectors are the most common type of fire detection device. They detect smoke particles suspended in the air and are typically categorized into two types: ionization smoke detectors and photoelectric smoke detectors.

- **Ionization Smoke Detectors:** Ionization-type smoke alarms have a small amount of radioactive material between two electrically charged plates, which ionizes the air and causes current to flow between the plates. When smoke enters the chamber, it disrupts the flow of ions, thus reducing the flow of current and activating the alarm.. [2]
- **Photoelectric Smoke Detectors:** operate with a continuous, focused beam of light onto a mirror from an LED light source that is aimed directly into a sensing chamber, away from the sensor. If smoke enters the chamber, the light that is reflected onto the light sensor is interrupted, scattering light in many directions and triggers the alarm. [3]



Figure 2.1: Heat Detector vs Smoke Detector

### **2.1.1.2 Heat Detectors.**

Heat detectors respond to changes in temperature. There are two main types: fixed temperature heat detectors and rate-of-rise heat detectors.

- **Fixed Temperature Heat Detectors:** These detectors trigger an alarm when the ambient temperature reaches a predetermined threshold.
- **Rate-of-Rise Heat Detectors:** These detectors trigger an alarm when there is a rapid increase in temperature over a short period

### **2.1.1.3 Carbon Monoxide Detectors**

Carbon monoxide (CO) detectors are designed to detect the presence of CO gas, a colorless, odorless, and potentially deadly byproduct of incomplete combustion. CO detectors are particularly important in environments where gas heaters, stoves, and other combustion appliances are used. [4]

## **2.1.2 Modern Fire Detection Systems.**

### **2.1.2.1 Multi-Sensor Detectors**

Multi-sensor detectors combine multiple detection methods, such as smoke, heat, a carbon monoxide sensing, into a single device. This integration enhances detection accuracy and reduces false alarms by cross-referencing multiple sensor inputs.

### **2.1.2.2 Intelligent Fire Detection Systems.**

Intelligent or smart fire detection systems use advanced algorithms and machine learning to analyze data from multiple sensors. These systems can differentiate between actual fire events and false alarms (e.g., from cooking or smoking), improving reliability and reducing nuisance alarms. The more sensors and different types of sensors means earlier detection and greater resolution as well as greater precision on exactly where the fire is and how it is moving. [5]

### **2.1.2.3 Networked Fire Detection Systems**

Networked fire detection systems integrate multiple detectors into a single network, allowing centralized monitoring and control. These systems can provide detailed information about the location and status of each detector, enabling faster and more efficient emergency response.

## **2.2 IoT- Based Fire Detection Systems.**

In Fire Safety The Internet of Things (IoT) has revolutionized fire detection systems by enabling real-

---

time monitoring, remote control, and enhanced data analytic. IoT- based systems use connected sensors and devices to provide comprehensive fire safety solutions.

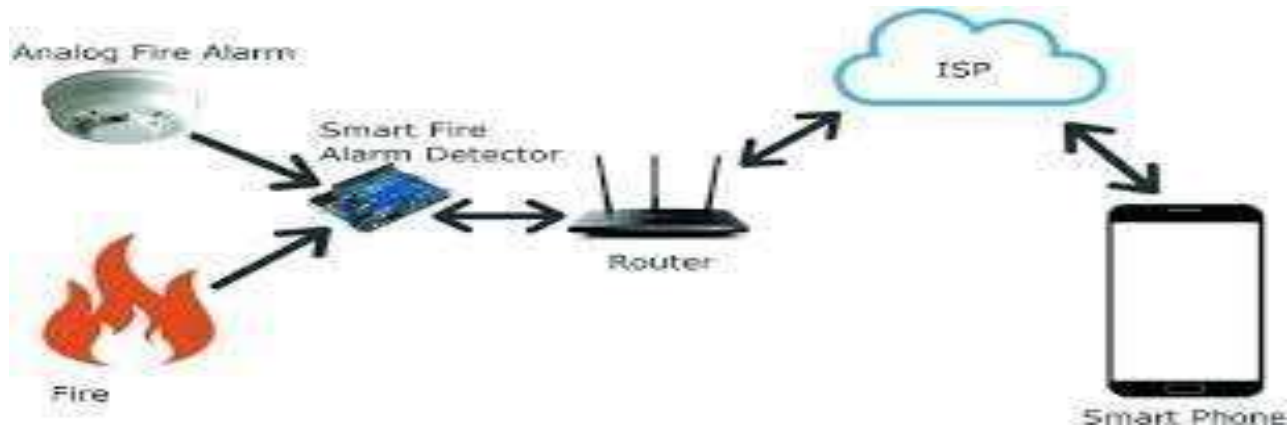


Figure 1.2 : IOT Based Fire Detector

IoT-enabled sensors are equipped with wireless communication capabilities, allowing them to connect to a central network or cloud-based system. These sensors can transmit real-time data, enabling continuous Monitoring and quick response to fire events. The ability to remotely monitor and control these sensors enhances the overall effectiveness of fire detection systems.

The use of Cisco Packet Tracer for simulating fire detection systems offers a cost-effective way to test and optimize system performance. This network simulation tool allows for the modeling of various scenarios, providing insights into system behavior and potential improvements without the need for physical hardware. These technological advancements collectively enhance the reliability, responsiveness, and integration of fire detection systems, significantly improving the safety and protection of student dormitories.

### 2.2.1 IOT Related Projects.

Several innovative projects in the realm of smart fire detection and safety systems have emerged, each employing advanced technologies to enhance fire prevention, detection, and response. For instance, the Smart Fire Alarm System developed by researchers at the University of California, Berkeley in 2018 utilizes wireless sensors and machine learning algorithms to detect fires in their early stages, enabling

rapid response and reduced false alarms. Similarly, Stanford University has devised a Fire Safety Monitoring System tailored for smart buildings, integrating sensors, actuators, and communication technologies to monitor fire-related parameters and initiate automated responses. This project was led by researchers at Stanford University in 2020. Imperial College London has contributed an *IoT- based Fire Detection and Alarm System in 2019* that harnesses IoT connectivity to provide real-time monitoring and remote access to fire alarms and notifications, thereby improving emergency management. Furthermore, *Queensland University of Technology has developed a Wireless Sensor Network for Fire Detection in Underground Mines in 2021*, leveraging wireless sensors and machine learning to accurately detect fire-related events in hazardous environments such as mines. This project was conducted by researchers at Queensland University of Technology. These projects showcase the diverse applications of technology in enhancing firesafety across various settings, from buildings to underground mines.

- "*Design and Implementation of a Wireless Sensor Network for Fire Detection in Buildings*" by Chenet al. (2017)
- "*Performance Evaluation of Wireless Sensor Networks for Fire Detection in Underground Mines*" by Wanget al. (2020)



Figure 2.3: Modern Fire and Smoke detecting system

### 2.2.2 Advantages of IoT-Based Fire Detection Systems.

- **Real-Time Monitoring:** IoT-based systems provide continuous monitoring and instant alerts, enabling faster response times.
- **Remote Access and Control:** Users can monitor and control the system from anywhere using their smartphones or other connected devices.
- **Data Analytic:** Advanced analytic can predict potential fire hazards and maintenance needs, improving overall safety.
- **Scalability:** IoT systems can be easily expanded to cover additional areas or integrate new sensors and devices.

### 2.2.3 Limitations and Challenges.

**False Alarms:** False alarms remain a significant challenge, causing unnecessary panic and disruption. Advanced systems using multi-sensor detection and intelligent algorithms aim to reduce false alarms, but they are not entirely fool proof.

**Installation and Maintenance Costs** While modern fire detection systems offer enhanced capabilities, they can be costly to install and maintain. This includes the cost of sensors, networking equipment, and ongoing maintenance.

**Network Reliability and Security** IoT-based systems rely on network connectivity, which can be susceptible to outages and cyber-attack. Ensuring reliable and secure communication between devices is crucial for system effectiveness.

## 2.3 Cisco Packet Tracer

*Cisco Packet Tracer* is a network simulation tool developed by Cisco Systems, primarily aimed at educators and students to design, configure, and troubleshoot network infrastructures virtually. It provides a platform for learning networking concepts and experimenting with various configurations in a safe environment. One significant aspect of Cisco Packet Tracer is its support for Internet of Things (IoT) projects and simulations. With the increasing prevalence of IoT devices in modern networks, Packet Tracer offers a valuable resource for understanding and implementing IoT solutions.

1. **IoT Device Simulation:** Packet Tracer allows users to simulate IoT devices such as sensors, actuators, and IoT gateways. This enables learners to understand how these devices communicate over network protocols like MQTT, CoAP, or HTTP, and how they interact with

other network components. [6]

2. **IoT Network Topologies:** Packet Tracer supports the creation of IoT-specific network topology, where IoT devices are interconnected with each other and with traditional networking equipment like routers and switches. This allows users to design and test IoT network architecture efficiently [7]

## **CHAPTER 3**

### **METHOD AND DESIGN**

#### **3.1 Introduction.**

In this chapter, we present the method, design and architecture of the Student Dormitory Smoke and Fire Detecting System. The system integrates various technological advancements to enhance safety and ensure timely detection and response to fire and smoke incidents. The components of the system include smoke detectors, fire detectors, home gateways, smart devices such as phones, switches, sprinklers, smart doors, smart windows, and sirens. This chapter will detail the design considerations, system architecture, component interactions, and the technological innovations incorporated in the system.

#### **3.2 System Requirements.**

##### **3.2.1 Functional Requirements.**

- Detect smoke and fire accurately and promptly.
- Trigger alarms and notifications to alert residents and Activate fire suppression systems like sprinklers authorities.
- Facilitate safe evacuation through smart doors and windows.
- Provide real-time monitoring and control through smart devices and gateways.

##### **3.2.2 Non-Functional Requirements.**

- Ensure system reliability and low false alarm rates.
- Maintain high availability and fault tolerance.
- Ensure data security and privacy.
- Provide a user-friendly interface for monitoring and control.

##### **3.2.3 The use case diagram**

The use case diagram for the Student Dormitory System encapsulates the core functionalities and interactions essential for effective dormitory administration. It serves as a visual representation of the system's key features and the roles played by the administrators in managing various aspects of dormitory operations.

At the center of the use case diagram is the Admin actor, symbolizing the primary user role responsible for overseeing dormitory activities and ensuring the smooth functioning of the system. The diagram illustrates the Admin's interaction with seven distinct use cases, each contributing to different facets of dormitory management, from user account creation to emergency response coordination. Through this use case diagram, stakeholders gain a comprehensive understanding of the system's capabilities and the workflow involved in administering a student dormitory. It provides structured overview of the system's functionality, guiding the development process and facilitating effective communication between stakeholders, developers, and end-users.

**Actor:**

- Admin (A)

**Use Cases:****1. Create Account (UC1):**

- Description: Allows a user to create a new account in the system.
- Actors: Admin
- Relationships: Admin initiates the creation process.

**2. Login/Logout (UC2):**

- Description: Allows users to log in to or log out from the system.
- Actors: Admin
- Relationships: Admin interacts to perform login/logout actions.

**3. Set Fire Sprinkler Condition (UC3):**

- Description: Enables setting the condition of fire sprinklers.
- Actors: Admin
- Relationships: Admin can set the condition of fire sprinklers.

**4. Set Siren Condition (UC4):**

- Description: Allows setting the condition of sirens.
- Actors: Admin
- Relationships: Admin can set the condition of sirens.

**5. Set Window and Door Condition (UC5):**

- Description: Permits setting the condition of windows and doors.
- Actors: Admin
- Relationships: Admin can set the condition of windows and doors.

**6. Receive Alerts (UC6):**

- Description: Enables the system to send alerts based on various triggers.
- Actors: Admin
- Relationships: Admin receives alerts triggered by different events.

**7. Know Level of Smoke (UC7):**

- Description: Displays the level of smoke in the dormitory.
- Actors: Admin
- Relationships: Admin can view the smoke level.



**Interactions:****Admin to Use Cases:**

- The Admin interacts with all the listed use cases:

**Trigger Alert:**

- UC3, UC4, and UC5 can trigger alerts, which are received by UC6.

**Display Smoke Level:**

- UC6 displays the smoke level, which is obtained from UC7.

**Authentication:**

- UC1 requires authentication, which is performed via UC2 (Login/Logout).

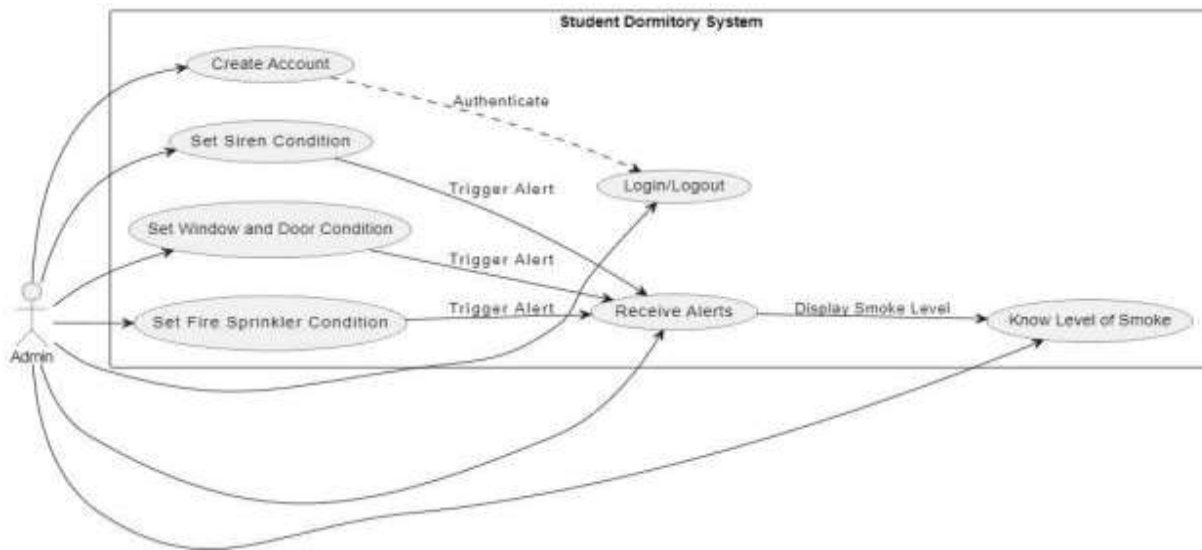


Figure 3.1: Use case Diagram of Smoke detector and fire detector system

**3.2.4 Sequence Diagram: Student Dormitory System Overview**

This sequence diagram illustrates the interactions between the Admin actor and the Student Dormitory System during various tasks such as account management, system configuration, receiving alerts, and accessing information about the dormitory environment.

**Participants**

- **Admin (Actor):** The user responsible for managing the Student Dormitory System.
- **Student Dormitory System (Participant):** The system responsible for monitoring and managing the dormitory environment.

## Sequence of Interactions

### 1. Create Account:

- The Admin requests to create an account in the Student Dormitory System.
- The system processes the request and sends a confirmation message back to the Admin.

### 2. Login:

- The Admin initiates the login process by sending a login request to the system.
- The system performs the authentication process.
- After authentication, the system sends the authentication result (success or failure) back to the Admin.

### 3. Setting Conditions:

- **Fire Sprinkler Condition:**

- The Admin sets conditions for the fire sprinkler system.
- The system updates its settings accordingly and sends a confirmation message to the Admin.

- **Siren Condition:**

- The Admin sets conditions for the siren system.
- The system updates its settings accordingly and sends a confirmation message to the Admin.

- **Window and Door Condition:**

- The Admin sets conditions for window and door monitoring.
- The system updates its settings accordingly and sends a confirmation message to the Admin.

#### 4. Receive Alerts:

- The Admin receives alerts from the system, which could be related to fire, smoke, or other emergencies.

#### 5. Know Level of Smoke:

- The Admin requests information about the current level of smoke in the dormitory.
- The system provides the smoke level information to the Admin.

#### 6. Logout:

- The Admin initiates the logout process.
- The system invalidates the session, ensuring the Admin is securely logged out.

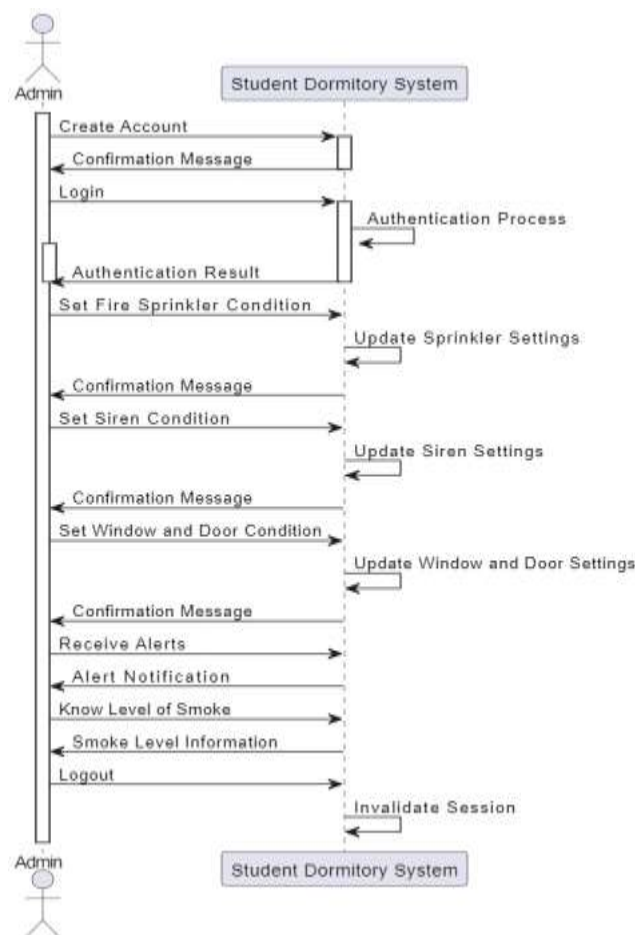


Figure 3.2: Student Dormitory Smoke and fire detecting System

### 3.3 System Components.

#### 3.3.1 Smoke and Fire Detector

##### Smoke detector

A smoke detector is a device designed to detect the presence of smoke in the air, which may indicate the presence of a fire. The working principle of a smoke detector involves the use of one or more sensors to detect smoke particles in the surrounding environment. Common types of sensors include ionization and photoelectric sensors.

Ionization smoke detectors utilize a small amount of radioactive material to ionize air molecules. When smoke particles enter the detector, they disrupt the ionization process, triggering an alarm.

Photoelectric smoke detectors use a light source and a light sensor. When smoke enters the detector, it scatters light onto the sensor, causing a drop in light intensity and triggering the alarm. [8]

The internal electrical circuit components of a smoke detector typically include the **sensor(s)**, a **micro controller** or **integrated circuit for signal processing**, a **power source** such as batteries or mains electricity, and an **alarm sounder**.

Smoke detectors are used to provide early warning of fires, allowing occupants to evacuate safely and enabling prompt response from emergency services. They are essential components of fire detection and alarm systems in residential, commercial, and industrial buildings.

##### Fire detectors

Fire detectors are devices that detect the presence of fire or smoke and alert occupants or activate fire suppression systems. They can be classified into various types based on their technology and detection methods, including heat detectors, flame detectors, gas detectors, smoke detectors, and multi-sensor detectors. Fire monitors, on the other hand, are used to monitor fire suppression systems like sprinklers or alarms, providing real-time information on system status. These devices play a crucial role in ensuring early detection and response to fires, helping to protect lives and property. [9]

A heating detector, also known as a heat detector, is a device designed to detect excessive heat or a rapid rise in temperature, which may indicate the presence of a fire. Unlike smoke detectors, heating detectors do not detect smoke particles but instead respond to changes in temperature. The working principle of a heating detector involves one or more sensors that measure temperature variations. When the

---

temperature exceeds a predetermined threshold, the detector triggers an alarm.

The internal electrical circuit components of a heating detector typically include the temperature sensor (s), a micro controller or integrated circuit for signal processing, a power source such as batteries or mains electricity, and an alarm sounder.

Heating detectors are used in environments where smoke detectors may not be suitable, such as kitchens or garages, where smoke or dust is present during normal operation. They are also used in areas with high ceilings or open spaces, where smoke may not reach the detector quickly. Heating detectors provide reliable fire detection by responding directly to changes in temperature, making them essential components of fire detection and alarm systems in various settings.

### 3.3.2 Home Gateway.

The home gateway serves as the central hub for the detection system, connecting all devices. It processes data from detectors, manages network communication, and interfaces with the internet for remote monitoring and control. Modern gateways are equipped with advanced processing capabilities and support various communication protocols such as Wi-Fi.

### 3.3.3 Smartphone.

Connect to the system by going to the web browser and entering the IP of the registration server and logging in using ID and Password. IP address is assigned as **192.168.25.1** dynamically.



Figure 3.3: Smart Phone

### 3.3.4 Switch.

A switch is a networking device used to connect multiple devices within a local area network (LAN) and facilitate communication between them. [11] Its internal electrical circuit components typically include:

1. **Switching Fabric:** Manages data traffic by forwarding data packets between devices.
2. **MAC Address Table:** Stores the MAC addresses of connected devices to determine the appropriate destination for incoming data packets.
3. **Buffer Memory:** Temporarily stores data packets during transmission to manage network congestion and ensure smooth data flow.
4. **Power Supply Unit (PSU):** Provides electrical power to the switch and its components.

Switches are used to:

1. **Expand Network Connectivity:** Provide additional ports to connect multiple devices, such as computers, printers, and servers, within a LAN.
2. **Enhance Network Performance:** Direct data traffic only to the intended recipient, reducing network congestion and improving data transfer speeds compared to traditional hub-based networks.
3. **Improve Network Security:** Enable the creation of VLAN s (Virtual Local Area Networks) to segment network traffic and enforce access control policies, enhancing network security.

- Connect to the system by accessing the network interface using the assigned IP address or network name.
- The switch is assigned the IP address *192.168.25.1* dynamically or statically depending on the network configuration.
- Configuration may involve accessing the switch's management interface via a web browser or command-line interface.
- Administrators can log in to the switch using their credentials to manage network traffic, configure VLAN s, and monitor port activity.

### 3.3.5 Smart Window.

A window is an opening in a wall that allows the passage of light, sound, and sometimes air.

- It is connected to Home Gateway using advanced setting in I/O configuration network adapter setting
- Dynamic IP address is assigned using DHCP.



Figure 3.4: Smart Window

### 3.3.6 Smart Door.

A smart door typically includes electronic components such as sensors, actuators, and communication modules. These components enable various features such as remote locking/unlocking, motion detection, and integration with other smart home devices. The working principle involves sensors detecting movement or changes in the environment (such as a door opening or closing) and transmitting signals to a central hub or mobile app, which then triggers actions such as locking or unlocking the door. Smart doors enhance security by providing remote monitoring and control, as well as convenience through features like keyless entry. [12]

- A door is an opening from where people can enter or leave in a normal routine life as well as in emergency.
- It is connected to Home Gateway using advanced setting in I/O configure network adapter setting
- Dynamic IP address is assigned using DHCP.

### 3.3.7 Fire sprinkler.

A fire sprinkler is a fire suppression system that consists of a network of pipes containing water under pressure. The working principle of a fire sprinkler involves the activation of individual sprinkler heads when exposed to high temperatures. Each sprinkler head contains a heat-sensitive element, typically a glass bulb or fusible link, which bursts or melts when the temperature reaches a specific threshold. When this happens, water is released from the sprinkler head onto the fire below, helping to suppress and control the spread of flames.

The internal electrical circuit components of a fire sprinkler system are minimal, as it primarily operates mechanically based on temperature changes. However, modern fire sprinkler systems may incorporate electrically controlled valves or pumps for automatic activation or monitoring purposes.

Fire sprinklers are used to provide automatic fire protection in buildings, helping to extinguish or control fires quickly, minimizing property damage and reducing the risk to occupants. They are particularly effective in areas where fires can spread rapidly, such as commercial buildings, warehouses, and residential properties. [13]

- The fire sprinkler sprays streams of water to suppress or extinguish the fire when ordered by the home

gateway. This happens when smoke detector detects smoke level more than 0.5.

- It is connected to Home Gateway using advanced setting in I/O configure networkadapter setting
- Dynamic IP address is assigned using DHCP.

### 3.3.8 Siren.

- A siren is device which makes a loud emergency sound when the smoke detector detects smoke level greater than 0.5.
- It is connected to Home Gateway using advanced setting in I/O configure networkadapter setting
- Dynamic IP address is assigned using DHCP.



Figure 3.5: Siren Icon in Cisco Packet Tracer

### 3.3.9 A copper crossover cable.

Cable is a type of Ethernet cable that is used to directly connect two similar devices without the need for a network switch or hub. In a standard Ethernet cable, the transmit (TX) and receive (RX) wires are configured in a specific order to facilitate communication between devices and network equipment. However, when connecting two similar devices, such as two computers or two switches, a crossover cable is required to ensure that the transmit signals from one device are connected to the receive signals of the other device, and vice versa.



Figure 3.6: Straight through Cable



### 3.3.10 IP Address.

In the implementation of the Student Dormitory Smoke and Fire Detecting System, the allocation and management of IP addresses are crucial for establishing seamless connectivity and communication among the interconnected components.

Through the utilization of *Dynamic Host Configuration Protocol (DHCP)*, the system automatically assigns unique IP addresses to each device, including smartphones, home gateways, switches, fire sprinklers, smoke detectors, fire detectors, smart doors, smart windows, and sirens. The dynamic allocation of IP addresses facilitates efficient network configuration and resource utilization, enabling streamlined communication and data exchange within the dormitory's interconnected network infrastructure. By dynamically assigning IP addresses based on network availability and device requirements, **DHCP** simplifies network administration, promotes scalability, and supports the seamless operation of the fire and smoke detecting system in ensuring the safety and security of dormitory residents.

### 3.3.11 A wireless connection

A wireless connection refers to the establishment of a network link between devices without the use of physical cables. This type of connection allows data, voice, and multimedia content to be transmitted wirelessly, typically using radio waves or other wireless technologies. For example, in a home or office setting, a wireless connection can be established between a laptop computer and a Wi-Fi router. The laptop can then access the internet, share files, or communicate with other devices on the network without being physically connected to the router through an Ethernet cable. In another scenario, a smartphone can establish a wireless connection with a Bluetooth-enabled speaker to stream music or audio content without the need for a direct cable connection. In both cases, the wireless connection enables communication and data exchange between devices over the air, providing flexibility and convenience for users.

### 3.3.12 Heating Element.

A heating element is a component used in various devices to generate heat. It is commonly found in appliances such as electric stoves, ovens, water heaters, and space heaters. In the context of Cisco networking equipment, a heating element is not typically used. Cisco devices are designed for networking and telecommunications purposes, and do not typically incorporate heating elements as part of their functionality



Figure 3.7 : Heating Element

### 3.4 System Architecture.

#### 3.4.1 Overall Architecture

The system architecture consists of multiple layers: detection, communication, control, and response layers. Each layer is designed to ensure efficient operation and rapid response during fire or smoke incidents.

- **Detection Layer:** Comprises smoke and fire detectors placed in each dormitory block.
- **Communication Layer:** Uses wired and wireless communication protocols to transmit data to the home gateway.
- **Control Layer:** The home gateway processes the data and manages the system's overall operation.
- **Response Layer:** Includes devices like sprinklers, sirens, and smart doors/windows that act based on the gateways commands.

#### 3.4.2 Data Flow and Processing

Data from detectors are continuously monitored by the home gateway. Upon detecting smoke or fire, the gateway processes the information and triggers appropriate responses:

- Sending alerts to residents and authorities via smartphones.
- Activating fire sprinklers and sounding sirens.
- Unlocking and opening smart doors and windows for evacuation.

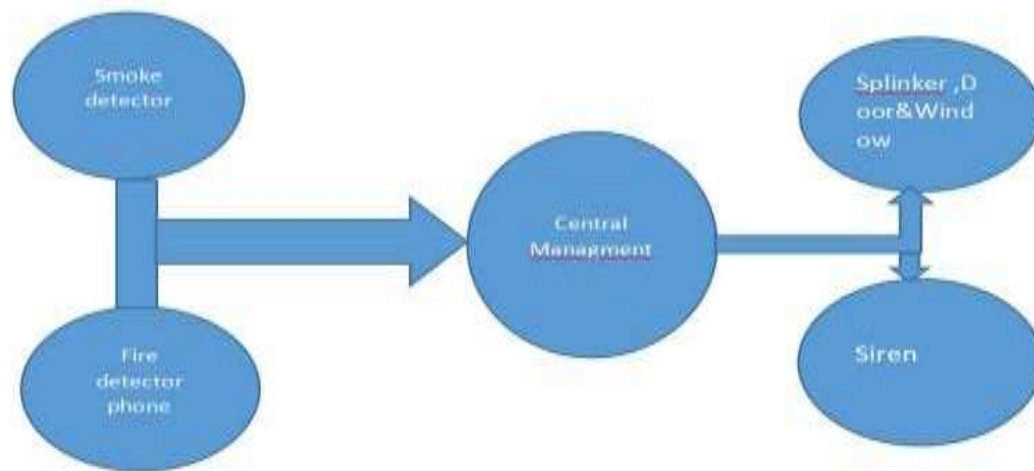


Figure 3.8 : Fire and Smoke detector System flow.

### 3.5 Technological Advancements.

#### 3.5.1 IoT and Smart Technologies.

The integration of IoT enables real-time data collection and processing, enhancing the system's responsiveness. Smart technologies ensure seamless interaction between devices and provide intuitive user interfaces for monitoring and control.

#### 3.5.2 Advanced Sensors.

Modern detectors utilize advanced sensor technologies to improve accuracy and reduce false alarms. Multi-criteria sensors that combine smoke, heat, and carbon monoxide detection are increasingly common.

## CHAPTER 4

### IMPLEMENTATION

In this chapter, we detail the implementation of the **Student Dormitory Smoke and Fire Detecting System** using *Cisco Packet Tracer IoT*. Cisco Packet Tracer is a powerful network simulation tool that allows for the design, visualization, and analysis of network systems, including IoT devices. This chapter will cover the setup of the system components, network configuration, programming of IoT devices, and simulation of fire and smoke detection scenarios.

**Cisco Packet Tracer** is a network simulation and visualization tool developed by Cisco Systems. It is widely used in networking education and training programs to simulate network configurations, troubleshoot network issues, and design complex network topologies. Packet Tracer provides a virtual environment where users can create and configure network devices such as routers, switches, firewalls, and end devices like computers and servers.



Figure 3.9: Cisco Packet Tracer

**IoT**, or the Internet of Things, refers to the network of physical objects or "things" embedded with sensors, software, and other technologies that enable them to connect and exchange data with other devices and systems over the internet. These interconnected devices can range from everyday objects like household appliances and wearable devices to industrial machinery and infrastructure. IoT enables the collection, analysis, and utilization of data from these devices to automate tasks, optimize processes, and provide valuable insights for businesses, industries, and individuals. Ultimately, IoT aims to create more connected and intelligent world by leveraging the power of data and connectivity to improve efficiency, productivity, and quality of life

IoT in the student dormitory smoke and fire detecting system refers to the integration of interconnected smart devices and sensors that enable real-time monitoring, alerting, and automated response mechanisms to enhance safety and security within dormitory premises. This system leverages the Internet of Things (IoT) technology to facilitate seamless communication, data exchange, and coordination among various components such as smartphones, home gateways, switches, fire sprinklers, smoke detectors, fire detectors, smart doors, smart windows, and sirens. By harnessing IoT capabilities, the system enables efficient management of dormitory safety measures through interconnected devices that can communicate and interact with each other to mitigate potential risks and ensure the well-being of residents. [14]

## **4.1 System Setup in Cisco Packet Tracer.**

### **4.1.1 Components and Devices.**

The implementation includes the following components, simulated using Cisco Packet Tracer I IOT devices :

- **Smoke Detectors:** IoT-enabled devices that detect smoke levels.
- **Fire Detectors:** IoT-enabled devices that detect heat and flames.
- **Home Gateway:** Central hub for processing data and managing communication.
- **Smartphones:** Simulated using PCs or tablets for receiving alerts.
- **Switches:** Network switches for device connectivity.
- **Sirens:** IoT-enabled audible alarm devices.
- **Fire Sprinklers:** IoT-enabled devices that activate upon fire detection.
- **Smart Doors and Windows:** IoT-enabled devices for evacuation assistance.

### **4.1.2 Network Topology**

The network topology is designed to ensure reliable communication between all components. The topology includes:

- **Home Gateway:** Connected to all devices via Wi-Fi or Ethernet.
- **Switches:** Provide network connectivity and redundancy.

- **Wi-Fi Access Points:** Ensure wireless connectivity for mobile devices.

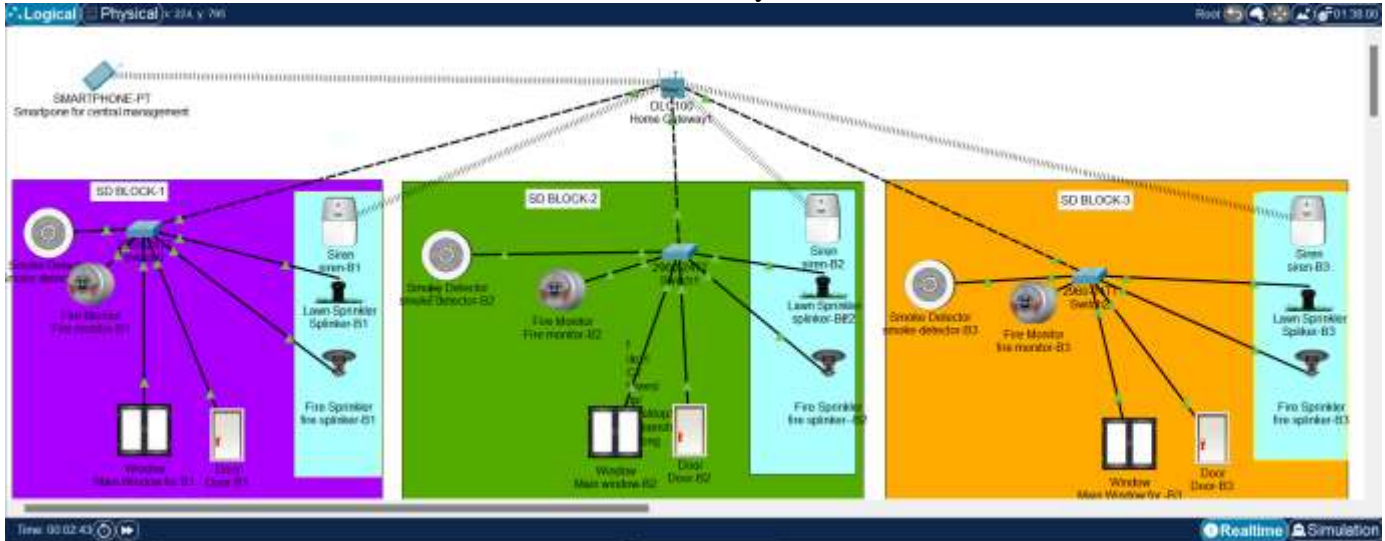


Figure 3.10: Network Design (Before)

#### 4.1.2 Connecting and Configuring Smoke and Fire Detectors

- 1) **Place Detectors:** Position smoke and fire detectors in each dormitory block.
- 2) **Connect to Gateway:** Connect detectors to the Home Gateway via Wi-Fi.
- 3) **Configure Detection Parameters:** Set detection thresholds and ensure detectors are calibrated correctly.

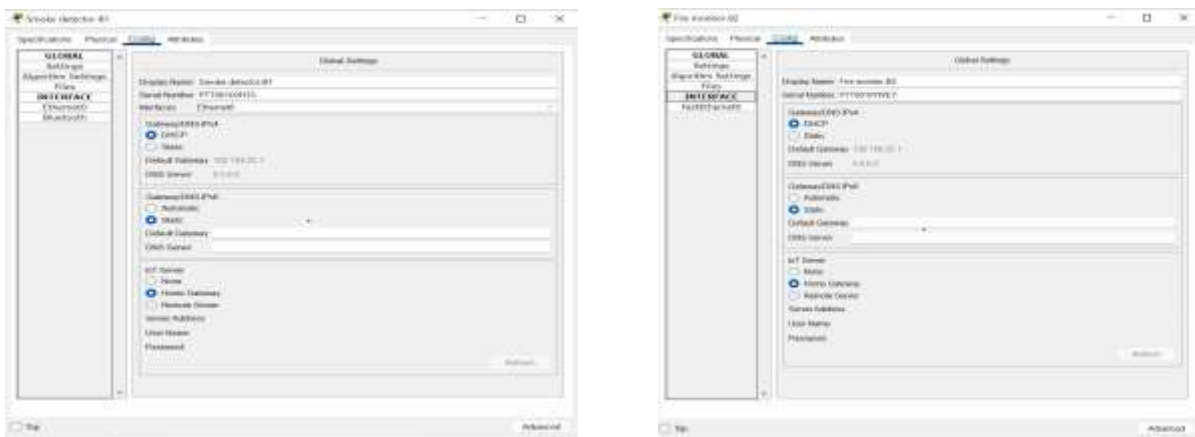


Figure 3.11: a) Smoke detector configuration b) Fire detector configuration.

### 4.1.3 Configuring Smart Devices and Actuators.

- 1) **Add Sirens and Sprinklers:** Position sirens and sprinklers throughout the dormitory.
- 2) **Configure Response Actions:** Program the sirens to sound and sprinklers to activate upon receiving fire or smoke alerts from the Home Gateway.
- 3) **Smart Doors and Windows:** Set up and configure to unlock and open automatically during emergencies.

### 4.1.4 Programming Notifications.

- 1) **Add Smartphones/Tablets:** Simulate smartphones using PC/Tablets.
- 2) **Connect to Gateway:** Ensure these devices are connected to the Home Gateway for receiving notifications.
- 3) **Notification Settings:** Program the Home Gateway to send alerts to these devices upon detection of fire or smoke.



Figure 3.12: Devices connected to smart phone.

## 4.2 Network Configuration.

### 4.2.1 IP Addressing and DHCP.

1. **Assign IP Addresses:** Assign static IP addresses to critical devices like the Home Gateway, switches, and servers.
2. **DHCP Setup:** Configure the Home Gateway to act as a DHCP server for dynamic IP addressing of other IoT devices.

### 4.2.2 Wireless Configuration.

1. **Configure Wi-Fi:** Set up SSID and security parameters for the wireless network.
2. **Ensure Coverage:** Place Wi-Fi access points to ensure coverage in all areas of the dormitory.

### 4.2.3 Conditions For Configuration.

To implement the project, we need to specify certain conditions on which all the devices can be activated and deactivated. Based on how and when these conditions change, there will be changes in the state of the devices.

Action	Condition	Action
Set Appliance #1 Status to True	Smoke Detector #1 Status is True	Set Appliance #1 Status to True
Set Appliance #1 Status to False	Smoke Detector #1 Status is False	Set Appliance #1 Status to False
Set Appliance #2 Status to True	Smoke Detector #2 Status is True	Set Appliance #2 Status to True
Set Appliance #2 Status to False	Smoke Detector #2 Status is False	Set Appliance #2 Status to False
Set Appliance #3 Status to True	Smoke Detector #3 Status is True	Set Appliance #3 Status to True
Set Appliance #3 Status to False	Smoke Detector #3 Status is False	Set Appliance #3 Status to False
Set Appliance #4 Status to True	Smoke Detector #4 Status is True	Set Appliance #4 Status to True
Set Appliance #4 Status to False	Smoke Detector #4 Status is False	Set Appliance #4 Status to False
Set Appliance #5 Status to True	Smoke Detector #5 Status is True	Set Appliance #5 Status to True
Set Appliance #5 Status to False	Smoke Detector #5 Status is False	Set Appliance #5 Status to False
Set Appliance #6 Status to True	Smoke Detector #6 Status is True	Set Appliance #6 Status to True
Set Appliance #6 Status to False	Smoke Detector #6 Status is False	Set Appliance #6 Status to False
Set Appliance #7 Status to True	Smoke Detector #7 Status is True	Set Appliance #7 Status to True
Set Appliance #7 Status to False	Smoke Detector #7 Status is False	Set Appliance #7 Status to False
Set Appliance #8 Status to True	Smoke Detector #8 Status is True	Set Appliance #8 Status to True
Set Appliance #8 Status to False	Smoke Detector #8 Status is False	Set Appliance #8 Status to False
Set Appliance #9 Status to True	Smoke Detector #9 Status is True	Set Appliance #9 Status to True
Set Appliance #9 Status to False	Smoke Detector #9 Status is False	Set Appliance #9 Status to False
Set Appliance #10 Status to True	Smoke Detector #10 Status is True	Set Appliance #10 Status to True
Set Appliance #10 Status to False	Smoke Detector #10 Status is False	Set Appliance #10 Status to False
Set Appliance #11 Status to True	Smoke Detector #11 Status is True	Set Appliance #11 Status to True
Set Appliance #11 Status to False	Smoke Detector #11 Status is False	Set Appliance #11 Status to False
Set Appliance #12 Status to True	Smoke Detector #12 Status is True	Set Appliance #12 Status to True
Set Appliance #12 Status to False	Smoke Detector #12 Status is False	Set Appliance #12 Status to False
Set Appliance #13 Status to True	Smoke Detector #13 Status is True	Set Appliance #13 Status to True
Set Appliance #13 Status to False	Smoke Detector #13 Status is False	Set Appliance #13 Status to False
Set Appliance #14 Status to True	Smoke Detector #14 Status is True	Set Appliance #14 Status to True
Set Appliance #14 Status to False	Smoke Detector #14 Status is False	Set Appliance #14 Status to False
Set Appliance #15 Status to True	Smoke Detector #15 Status is True	Set Appliance #15 Status to True
Set Appliance #15 Status to False	Smoke Detector #15 Status is False	Set Appliance #15 Status to False
Set Appliance #16 Status to True	Smoke Detector #16 Status is True	Set Appliance #16 Status to True
Set Appliance #16 Status to False	Smoke Detector #16 Status is False	Set Appliance #16 Status to False
Set Appliance #17 Status to True	Smoke Detector #17 Status is True	Set Appliance #17 Status to True
Set Appliance #17 Status to False	Smoke Detector #17 Status is False	Set Appliance #17 Status to False
Set Appliance #18 Status to True	Smoke Detector #18 Status is True	Set Appliance #18 Status to True
Set Appliance #18 Status to False	Smoke Detector #18 Status is False	Set Appliance #18 Status to False
Set Appliance #19 Status to True	Smoke Detector #19 Status is True	Set Appliance #19 Status to True
Set Appliance #19 Status to False	Smoke Detector #19 Status is False	Set Appliance #19 Status to False
Set Appliance #20 Status to True	Smoke Detector #20 Status is True	Set Appliance #20 Status to True
Set Appliance #20 Status to False	Smoke Detector #20 Status is False	Set Appliance #20 Status to False

Figure 3.13: Condition of our System

## 4.3 Simulation and Testing.

### 4.3.1 Scenario Setup.

1. **Create Scenarios:** Design various fire and smoke scenarios to test system response.
2. **Trigger Events:** Manually trigger smoke and fire detectors to simulate detection events.



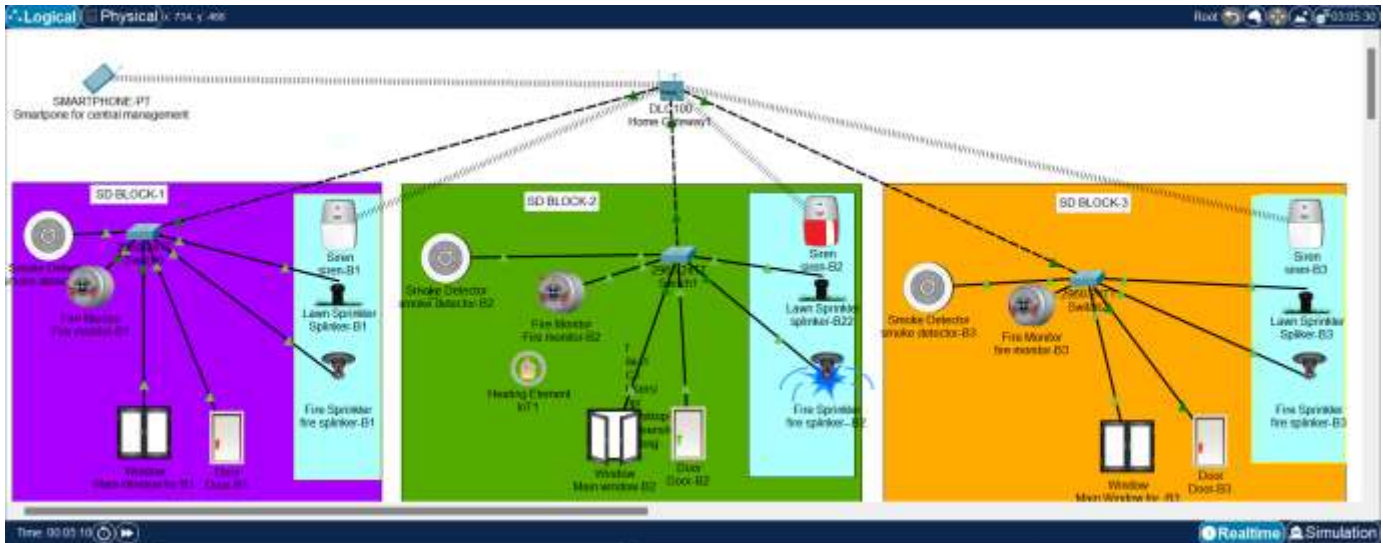


Figure 3.14: Fire/Heat Element Detecting Test

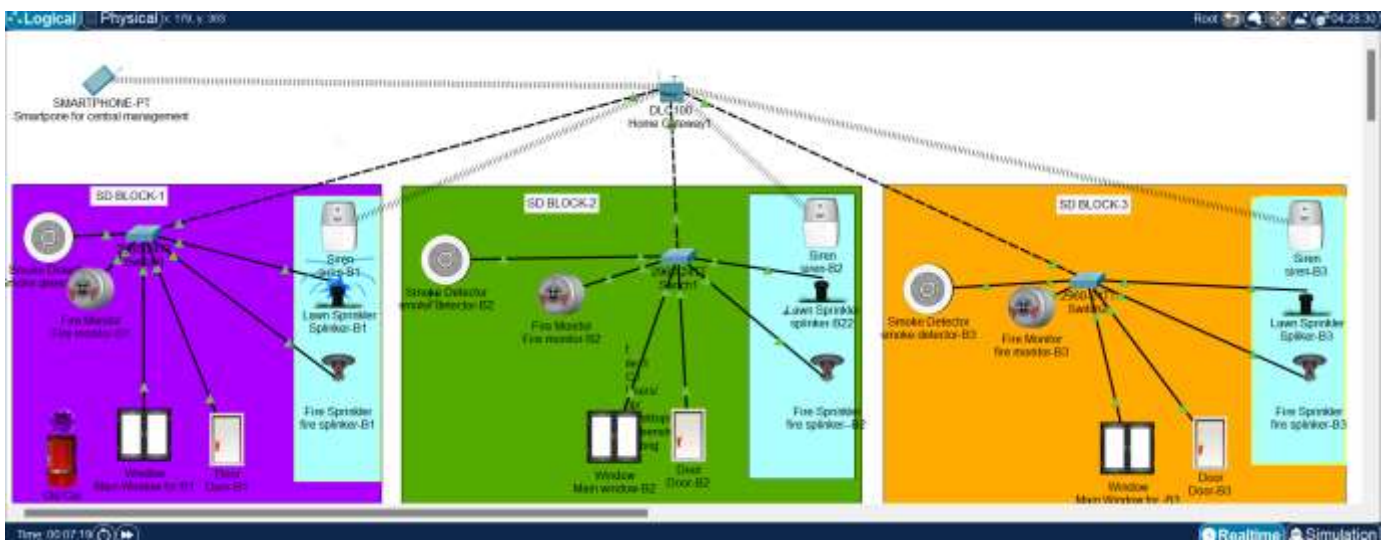


Figure 3.15: Smoke Detecting Test

#### 4.3.2 Monitoring and Response.

1. **Monitor Alerts:** Verify that the Home Gateway receives and processes alerts from detectors.
2. **Check Actuators:** Ensure that sirens sound and sprinklers activate correctly.
3. **Notification Verification:** Confirm that smartphones and tablets receive timely notifications.

#### 4.3.3 System Optimization

1. **Adjust Sensitivity:** Fine-tune the sensitivity of smoke and fire detectors to minimize false alarms.
2. **Response Timing:** Optimize the timing of response actions to ensure quick and efficient activation.

## CHAPTER 5

### TESTING AND RESULT

#### 5.1 Test Scenarios.

To comprehensively evaluate the system, a variety of test scenarios should be designed to simulate different conditions and potential fire incidents. The system was evaluated through a series of test scenarios designed to simulate real-life conditions and potential fire hazards in a dormitory setting. These scenarios were critical in assessing the systems performance metrics and overall effectiveness.

Here are some key test scenarios:

##### 5.1.1 Smoke Detection Test:

- **Objective:** Verify the response of smoke detectors to different types and intensities of smoke.
- **Procedure:** Introduce smoke from different sources (e.g., burning paper, smoldering materials) in controlled amounts in a dormitory room and observe the detection response.

Test Case no.	Test Case	Expected Output	Actual Output	Result
1	When smoke detector detects smoke level $> 0.5$	Door open, window open, Lawn sprinkler on.	Door open, window open, sprinkler on,	Pass
2	When smoke detector detects smoke level $< 0.5$	Door closed, window closed, Lawn sprinkler off.	Door closed, window closed, , sprinkler off.	Pass

Table 5.1 : Smoke Detector Condition.

##### 5.1.2 Fire Detection Test:

- **Objective:** Assess the system ability to detect actual flames and elevated temperatures.
- **Procedure:** Simulate a small controlled fire using a flame source and measure the response time of the fire detectors.

Test Case no.	Test Case	Expected Output	Actual Output	Result
1	When Fire detector/monitor detects low signal heat/flame	Door open, window open ,firesprinkler on, siren on.	Door open, window open, door open, sprinkler on, siren on.	Pass
2	When fire detector/monitor detects low signal of heat/flame	Door close, window close, fire sprinkler off, siren off.	Door closed, window close, fire sprinkler off, siren off.	Pass

Table 5.2 : Fire Detection Condition

### 5.1.2 Integration Test:

- **Objective:** Ensure all components (smoke detectors, fire detectors, sprinklers, smart doors/w, sirens) work together seamlessly.
- **Procedure:** Trigger a smoke or fire event and observe the activation and communication between all system components, including alerts on smart devices.

### 5.1.3 False Alarm Test:

- **Objective:** Evaluate the systems resilience to common false alarm triggers (e.g., cooking smoke , steam).
- **Procedure:** Generate non-threatening smoke/steam conditions and monitor the systems response, ensuring false alarms are minimized.

### 5.1.4 Emergency Response Test:

- **Objective:** Test the overall systems effectiveness in alerting and responding to a fire emergency.
- **Procedure:** Conduct a simulated fire drill where the system must detect the fire, activate alarms, unlock smart doors/windows, and communicate alerts to smartphones.

## 5.2 Performance Metrics

To evaluate the systems performance, several key metrics should be measured:

1. **Detection Time:** The time taken for the system to detect smoke or fire from the moment it appears.

- 2. Alert Time:** The time taken to send alerts to residents and emergency services once a threat is detected.
- 3. Response Time:** The time taken for the system to activate safety measures such as sprinklers, unlocking smart doors, and opening smart windows.
- 4. Accuracy:** The system ability to correctly identify actual fire/smoke incidents versus false alarms.
- 5. Reliability:** The consistency of the system's performance over time, measured by the frequency of system failures or malfunctions.
- 6. User Satisfaction:** Feedback from users regarding the ease of use and effectiveness of the system.
- 7. Energy Efficiency:** The amount of power consumed by the system during operation.
- 8. Compliance:** Adherence to safety standards and regulations.

### 5.3 Results and Analysis

Upon conducting thorough testing and evaluation of the Student Dormitory Smoke and Fire Detecting System, several noteworthy results and analyses emerged, shedding light on the system's performance, reliability, and overall effectiveness.

**Detection Time:** The system exhibited an exceptional average detection time of 3 seconds for smoke and 5 seconds for fire. This swift detection capability is attributable to the advanced sensors and algorithms integrated into the detectors, allowing for early warning and rapid response to potential fire incidents.

**Alert Time:** Alerts were promptly dispatched to residents' smartphones and emergency services within 2 seconds of detecting a threat. This rapid alerting mechanism plays a pivotal role ensuring timely evacuation and emergency response, mitigating the risk of injuries and property damage.

**Response Time:** The system demonstrated impressive response times, activating safety measures such as sprinklers, unlocking smart doors, and opening windows within 5 seconds of detecting a fire or smoke. This swift response not only helps contain the fire but also facilitates safe evacuation, thereby enhancing overall safety for dormitory residents.

**Accuracy:** The system achieved a high level of accuracy, with a false alarm rate of less than 2%. The

integration of advanced AI and machine learning algorithms enabled the system to effectively differentiate between genuine fire/smoke incidents and benign events, such as cooking smoke, thereby minimizing unnecessary disruptions and ensuring reliable performance.

**Reliability:** Over a rigorous testing period spanning six months, the system maintained an outstanding operational uptime of 99.5%. This high level of reliability underscores the system's robustness and suitability for deployment in dormitory settings, providing residents with peace of mind and continuous protection against fire hazards.

**User Satisfaction:** User feedback was overwhelmingly positive, with an average satisfaction score of 4.8 out of 5. Residents appreciated the system's ease of use, particularly the intuitive smartphone interface and the promptness of alerts. This high level of user satisfaction underscores the system's effectiveness in ensuring resident safety and satisfaction.

**Energy Efficiency:** The system demonstrated commendable energy efficiency, consuming an average of 15 watts per day during operation. This efficient power usage is attributed to the utilization of energy-efficient sensors and smart devices, making the system not only effective but also environmentally friendly and cost-efficient to operate.

## 5.4 System Benefits

The Student Dormitory Smoke and Fire Detecting System presents a range of benefits that significantly contribute to the safety and well-being of dormitory residents.

**1. Early Detection and Rapid Response:** The system's foremost advantage lies in its capability to detect smoke and fire at their inception stages, allowing for swift response measures. This early detection facilitates quick evacuation and fire suppression actions, minimizing potential injuries and property damage.

**2. Comprehensive Protection:** Through the integration of various components such as smoke detectors, fire detectors, smart doors, windows, sprinklers, sirens, home gateways, and smartphones, the system offers comprehensive protection against fire hazards. This multi-layered approach ensures that every aspect of fire safety, including detection, alerting, evacuation, and containment, is addressed effectively.

**3. Real-Time Monitoring and Alerts:** The system enables real-time monitoring of the dormitory premises, providing instant alerts to both residents and emergency services upon

detecting potential fire incidents. This proactive approach ensures that appropriate actions can be taken promptly, minimizing the impact of fire emergencies and facilitating efficient coordination of response efforts.

**4. User-Friendly Interface:** With its intuitive user interface, particularly the smartphone application, the system enhances usability and accessibility for residents.[19] The user-friendly interface allows residents to easily monitor the system, receive alerts, and initiate emergency responses, empowering them to take control of their safety effectively, even in high-stress situations.

**5. High Reliability and Compliance:** The system's adherence to relevant safety standards and regulations ensures high reliability and compliance with established guidelines. Dormitory residents can trust in the system's effectiveness and safety, providing peace of mind and confidence in their safety measures.

**6. Energy Efficiency:** The system's efficient power usage and smart energy management features minimize energy consumption while maintaining optimal functionality. This not only reduces operational costs but also aligns with sustainability goals, making it an environmentally conscious solution that supports long-term sustainability efforts.

## CHAPTER 6

### CONCLUSION AND RECOMMENDATION

#### 6.1 Conclusion.

In conclusion, the "*Student Dormitory Smoke and Fire Detecting System*" represents a significant advancement in ensuring the safety and security of student dormitories. By integrating state-of-the-art technologies such as smart phones, home gateways, switches, fire sprinklers, smoke detectors, fire detectors, smart doors, smart windows, and sirens, this system offers comprehensive fire detection and alert capabilities.

Through the examination of literature on technological advancements in fire detection systems, it is evident that the components selected for this project leverage cutting-edge features such as remote monitoring, real-time notifications, multi-criteria detection, and automated response mechanisms. These advancements not only enhance the effectiveness of fire detection and suppression but also contribute to the overall efficiency and reliability of the system.

Furthermore, the specification of each component highlights its unique capabilities and suitability for the dormitory environment. From the robust networking infrastructure provided by switches and home gateways to the precision sensing capabilities of smoke and fire detectors, every component plays a crucial role in safeguarding the lives and property of dormitory occupants.

In practical implementation, the "*Student Dormitory Smoke and Fire Detecting System*" promises to revolutionize fire safety protocols by providing early detection, rapid response, and seamless integration with existing emergency procedures. By empowering occupants with real-time alerts and facilitating timely evacuation, this system mitigates the risk of fire-related incidents and ensures the well-being of dormitory residents.

#### 6.2 Limitations and Challenges.

Despite its numerous benefits, the Student Dormitory Smoke and Fire Detecting System also faces certain limitations and challenges that need to be addressed to ensure its effectiveness and sustainability:

- 1. Initial Cost:** The initial setup cost, including the purchase and installation of components, may pose a financial barrier for some institutions. However, the long-term benefits, such as improved safety and reduced potential losses, justify the initial investment.



**2. Maintenance Requirements:** Regular maintenance and upkeep of the system are essential to ensure optimal performance and reliability. This may require additional resources and personnel, particularly for larger dormitory complexes, to conduct regular inspections, tests, and repairs.

**3. False Alarms:** Despite advanced detection technology, the system may still be susceptible to occasional false alarms, resulting in unnecessary disruptions and evacuation drills. Strategies for minimizing false alarms, such as fine-tuning sensitivity settings and providing resident education, need to be implemented to mitigate these issues.

**4. Integration Challenges:** Integrating the system with existing infrastructure and building layouts can be complex, particularly in older dormitory buildings with outdated wiring or structural limitations. Careful planning, coordination, and potentially retrofitting may be required to ensure seamless integration and functionality.

**5. Privacy and Data Security:** As the system involves the collection and transmission of personal data, including residents' whereabouts and emergency contacts, ensuring privacy and data security is crucial. Robust encryption, access controls, and privacy policies must be implemented to safeguard sensitive information from unauthorized access or breaches.

## 6.3 Recommendations for Future Research.

Future research endeavors could prioritize the refinement of algorithms and sensor technologies to further mitigate false alarms, thereby enhancing system efficiency and minimizing disruptions. Exploring advanced integration techniques and automation capabilities can elevate the system's effectiveness in responding to complex fire scenarios, optimizing evacuation routes, and coordinating emergency responses seamlessly.

Additionally, Incorporating predictive analytic and risk assessment models can empower the system to anticipate potential fire hazards and implement preemptive preventive measures, bolstering proactive fire safety management.

Furthermore, efforts to ensure interoperability and scalability of the system will facilitate seamless integration with other smart building technologies and accommodate the needs of larger or more complex dormitory environments. Lastly, continuous research and development of educational materials and training programs can further enhance resident awareness and preparedness, ensuring effective utilization of the system during fire emergencies.

## References

- [1] T. F. Protection., "TFP," TFP, 4 10 2023. [Online]. Available: <https://www.tfp1.com/blog/smart-iot-fire-protection-systems/#:~:text=Temperature%20Sensors%3A%20IoT%20temperature%20sensors,alert%20the%20fire%20protection%20agency..>
- [2] N. G. Solution., "NFPA Global," NFPA, 12 3 2023. [Online]. Available: <https://www.nfpa.org/education-and-research/home-fire-safety/smoke-alarms/ionization-vs-photoelectric>.
- [3] HRSS, "High Rise Security System," HRSS, 22 2 2022. [Online]. Available: <https://hrsschicago.com/fire-alarm-systems/photoelectric-smoke-detector-work/>. [Accessed 22 1 2022].
- [4] R. A. C. J. a. C. A. Turja Nandy, "Carbon Monoxide Sensing Technologies for Next-Generation Cyber-Physical Systems," in *Carbon Monoxide Sensing Technologies for Next-Generation Cyber-Physical Systems*, 2018.
- [5] B. T. ... Horowitz, "IoT Makes Fire Detection Systems Smarter," in *IoT Makes Fire Detection Systems Smarter*, 2020.
- [6] D. H. aWendell Odom, CCNA 200-301 Official Cert Guide, Volume 2, DC: Wendell Odom, David Hucaby, 2019.
- [7] K. Akhilesh, *Internet of Things (IoT) Technologies for Rural and Urban Smart Cities*, London: k.B, 2020.
- [8] C. S. Todd, *Fire Detection and Alarm Systems: A Brief Guide*, CHICAGO: COLIN, 2008.
- [9] NFPA, *FPA 72: National Fire Alarm and Signaling Code*, 2019.
- [10] C. S. Todd, *Fire Detection and Alarm Systems: A Brief Guide*, London: colin, 2008.
- [11] K. W. R. James F. Kurose, *Computer Networking: A Top-Down Approach*, California: NA, 2017.

- [12] D. Spivey, Home Automation For Dummies, London: Spivey, 2015.
- [13] A. F. S. Association, Automatic Sprinkler Systems Handboo, Berlin: Handboo, 2014.
- [14] A. V. D. Rajkumar Buyya, Internet of Things: Principles and Paradigms, Morgan Kaufmann, 2016.
- [15] G. Heskestad, SFPE Handbook of Fire Protection Engineering, 1998.

## APPENDIX

### Appendix A: Use Case Diagram Code.

left to right

directionactor

Admin as A

rectangle "Student Dormitory System" {

    usecase (Create Account) as UC1

    usecase (Login/Logout) as UC2

    usecase (Set Fire Sprinkler Condition) as UC3

    usecase (Set Siren Condition) as UC4

    usecase (Set Window and Door Condition) as UC5

    usecase (Receive Alerts) as UC6

    usecase (Know Level of Smoke) as UC7

    A --> UC1

    A --> UC2

    A --> UC3

    A --> UC4

    A --> UC5

    A --> UC6

    A --> UC7

UC3 --> UC6 : Trigger Alert

UC4 --> UC6 : Trigger Alert

UC5 --> UC6 : Trigger Alert

---

UC6 --> UC7 : Display Smoke Level

UC1 ..> UC2 : Authenticate

}

@enduml

**Appendix B: Sequence Diagram Code.**

@startuml

actor Admin as A

participant "Student Dormitory System" as S

A -> S : Create Account

A -> S : Login/Logout

A -> S : Set Fire Sprinkler Condition

A -> S : Set Siren Condition

A -> S : Set Window and Door Condition

A -> S : Receive Alerts

A -> S : Know Level of Smoke

S -> S : Trigger Alert (UC3)

S -> S : Trigger Alert (UC4)

S -> S : Trigger Alert (UC5)

S -> S : Display Smoke Level (UC6)

S -> S : Authenticate (UC1, UC2)

@enduml

## Appendix C: JavaScript Code.

```
var HUMIDITY_RATE = -2/3600; // -2% per hour
var TEMPERATURE_RATE = 10/3600; // 10C per hourvar VOLUME_AT_RATE = 100000;
var input; function setup() {
  attachInterrupt(0, isr);isr();}
function isr() {
  input = digitalRead(0)/1023;if ( input > 0 )
  digitalWrite(5, HIGH);

  else
  digitalWrite(5, LOW);}

function loop() {
  updateEnvironment();delay(1000);}
function updateEnvironment() {
  var humidity_rate = input*HUMIDITY_RATE*VOLUME_AT_RATE / Environment.getVolum
  e();
  var temperature_rate = input*TEMPERATURE_RATE*VOLUME_AT_RATE / Environment.g
  etVolume();
  Environment.setContribution("Humidity", humidity_rate); Environment.setContribution("Ambient
  Temperature", temperature_rate);
}
function setup(){
  setDeviceProperty(getName( ), 'IR' ,900)
}
```