

THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

LED1 POLARITY			LED2 POLARITY		
PIN 7	PIN 8	COLOR	PIN 9	PIN 10	COLOR
-	+	YELLOW	+	-	ORANGE
			-	+	GREEN


SCHEMATIC




RoHS



ELECTRICAL CHARACTERISTICS @ 25°C


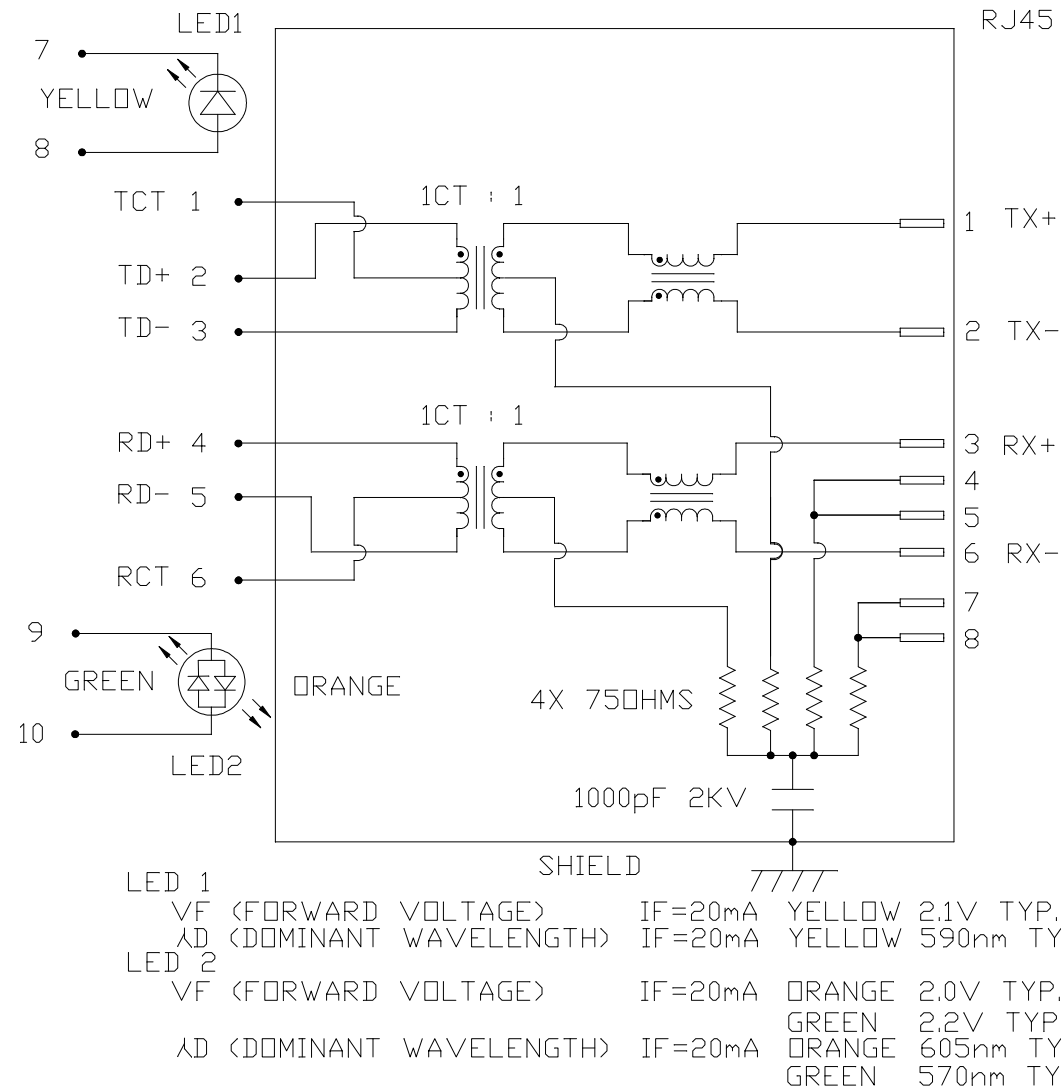
TRANSFORMER RATIO	1CT : 1
TX	1CT : 1
RX	
QCL @ 100kHz/100mVRMS	350μH MIN.
8mA DC BIAS	
INS. LOSS	
1MHz TO 100MHz	-1.0 dB MAX
RET. LOSS (MIN)	
1MHz-30MHz	-18 dB
30MHz-60MHz	-18+20LOG(F/30MHz) dB
60MHz-80MHz	-12 dB
CROSS TALK (TX - RX)	
500kHz-1MHz	-70 dB MIN
10 MHz	-50 dB MIN
30 MHz	-45 dB MIN
50 MHz	-40 dB MIN
100 MHz	-35 dB MIN
CM TO CM REJ	
100kHz-1MHz	-70 dB MIN
10 MHz	-47 dB MIN
30 MHz	-42 dB MIN
60 MHz	-37 dB MIN
100 MHz	-30 dB MIN
CM TO DM REJ	
100kHz-1MHz	-70 dB MIN
10 MHz	-60 dB MIN
30 MHz	-50 dB MIN
60 MHz	-45 dB MIN
100 MHz	-40 dB MIN
HIPOT (Isolation Voltage):	1500 Vrms
100% OF PRODUCTION TESTED TO COMPLY WITH IEEE 802.3 ISOLATION REQUIREMENTS.	



ORIGINATED BY	DATE	TITLE MagJack® (4 Cores, MDIX, CM Termination)	PART NO. / DRAWING NO. 08B01X1T06-F	STANDARD DIM.		[] METRIC DIM. AS REFERENCE		
CHOW WANCHUNG	2013-07-23			TOL. IN INCH		UNIT : INCH [mm]	REV. : D	
DRAWN BY	DATE		FILE NAME	.X		SCALE : N/A	SIZE : A4	
TAN QIGUANG	2013-07-23			08B0-1X1T-06-F		.XX		
		PATENTED	.XXX					

MECHANICAL SPECIFICATION

RoHS

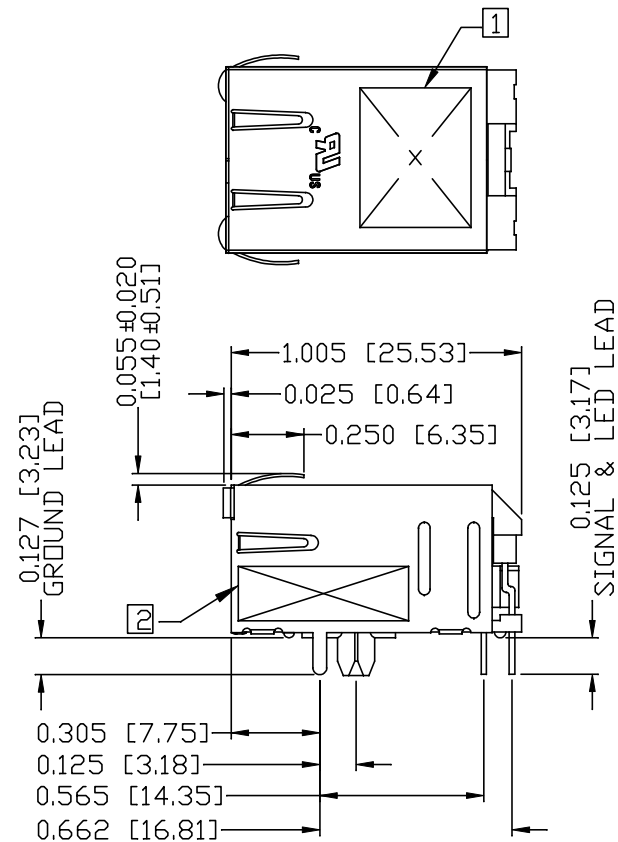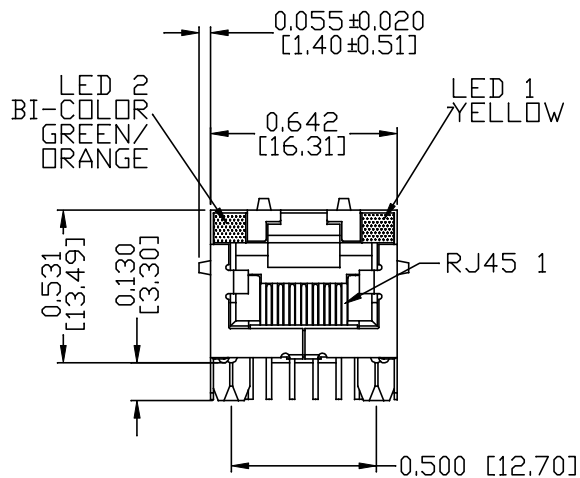

NOTES:

PLASTIC HOUSING: THERMOPLASTIC PBT

FLAMMABILITY RATING UL 94V-0

CONTACTS PLATING: 15 MICRO-INCH HARD GOLD PLATING OR EQUIVALENT.

PINS: TIN-COATED COPPER WIRE, DIA 0.018 INCH.

METAL SHIELD: PRE-PLATED NICKEL ON COPPER ALLOY.

1 MARK PART WITH MFG LOGO, MFG NAME, PART NUMBER AND DATE CODE.



2 "PATENTED" MARKING.

3. THE PRODUCT IS RoHS COMPLIANT.


4. JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS, PART 68 SUBPART F.

5. THE PRODUCT IS PATENTED. THE PATENT NUMBER IS U.S. PAT. 5,736,910.


 UL RECOGNIZED - FILE #E196366 AND E169987.

ORIGINATED BY ANTON LIAO	DATE 2013-07-23	TITLE MagJack® (4 Cores, MDIX, CM Termination) 08B0-1X1T-06-F PATENTED	PART NO. / DRAWING NO. 08B01X1T06-F	STANDARD DIM. TOL. IN INCH		[] METRIC DIM. AS REFERENCE		 COMPONENTS OR CONNECTED PLANET
DRAWN BY JESSE LI	DATE 2013-07-23		FILE NAME 08B01X1T06-F_D.DWG	.X		UNIT : INCH [mm]	REV. : D	
				.XX		SCALE : N/A	SIZE : A4	
				.XXX	±0.010		PAGE : 3	

bel
COMPONENTS FOR A
CONNECTED
PLANET

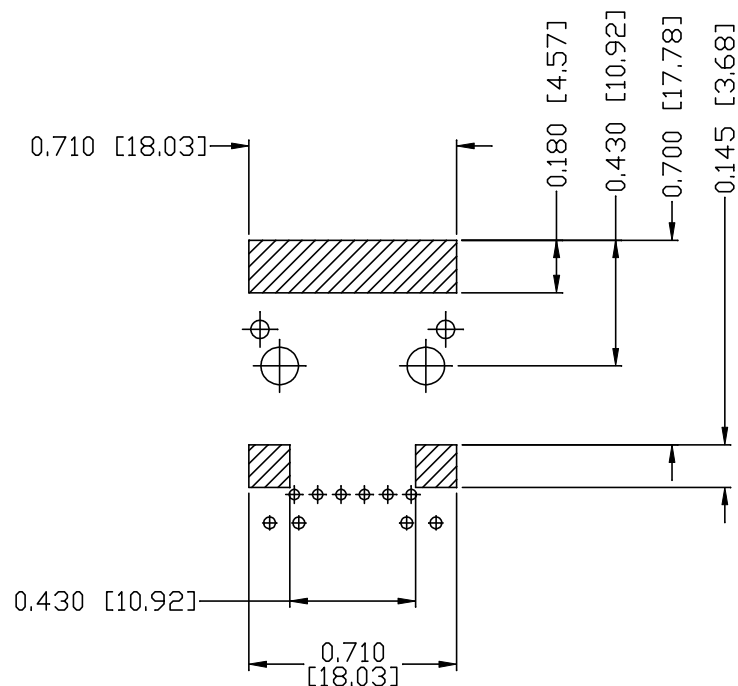

RECOMMENDED PCB FOOTPRINT
COMPONENT SIDE VIEW

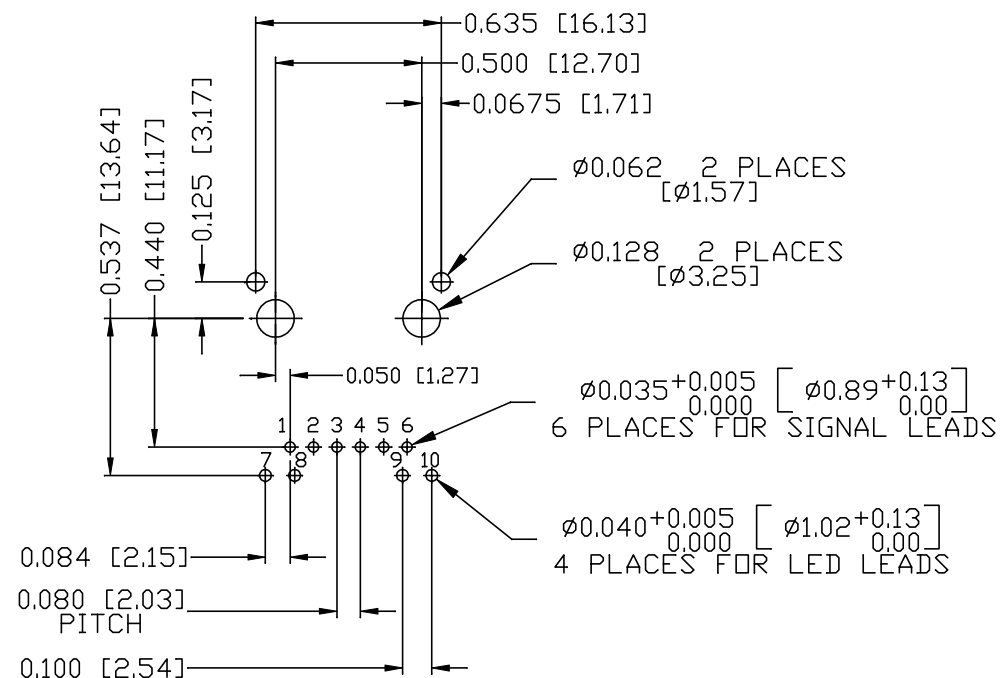


NOTES:

THE SHADED AREA ON THE CUSTOMER BOARD ARE
RECOMMENDED TO BE CLEAR OFF ANY VIA HOLE OR
COMPONENT PAD.

ORIGINATED BY ANTON LIAO	DATE 2013-07-23	TITLE MagJack® (4 Cores, MDIX, CM Termination)	PART NO. / DRAWING NO. 08B01X1T06-F	STANDARD DIM. TOL. IN INCH	[] METRIC DIM. AS REFERENCE	
DRAWN BY JESSE LI	DATE 2013-07-23	08B0-1X1T-06-F PATENTED	FILE NAME 08B01X1T06-F_D.DWG	.X .XX .XXX	UNIT : INCH [mm] SCALE : N/A REV. : D SIZE : A4 PAGE : 4	
				±0.004		



SUGGESTED PANEL OPENING

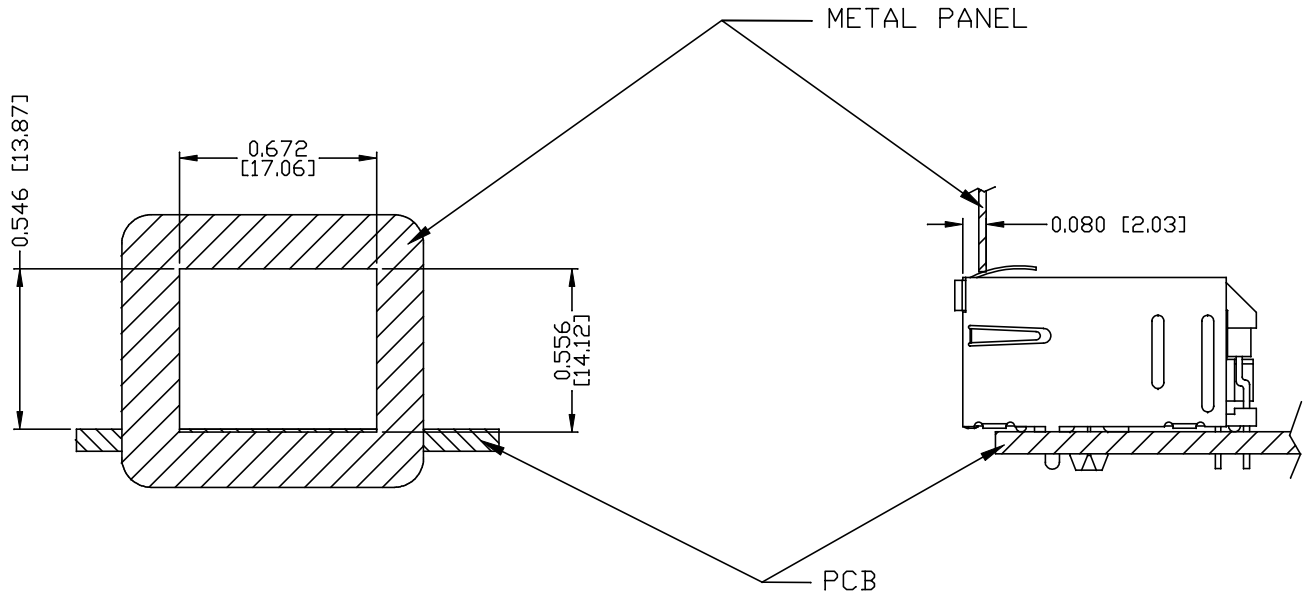

NOTE:

THE DISTANCE OF PANEL INSIDE SURFACE RELATIVE TO FRONT SURFACE OF PART IS ONLY A SUGGESTION. IN CASE THIS DISTANCE IS DIFFERENT, THE REQUIRED PANEL OPENING DIMENSIONS CHANGE ACCORDINGLY.

PACKING INFORMATION



PACKING TRAY : 0200-9999-D4(TOP)

0200-9999-D5(BOTTOM)

PACKING QUANTITY : 60 PCS FINISHED GOODS PER TRAY

11 TRAYS (660 PCS FINISHED GOODS) PER CARTON BOX

NOTE : CARDBOARDS ARE PLACED BETWEEN LAYERS OF PACKING TRAY INSIDE CARTON BOX
(INCLUDE THE UPPERMOST AND LOWERMOST TRAY)

ORIGINATED BY ANTON LIAO	DATE 2013-07-23	TITLE MagJack® (4 Cores, MDIX, CM Termination)	PART NO. / DRAWING NO. 08B01X1T06-F	STANDARD DIM. TOL. IN INCH		[] METRIC DIM. AS REFERENCE		 COMPONENTS FOR A CONNECTED PLANET
				.X		UNIT : INCH [mm]	REV. : D	
DRAWN BY JESSE LI	DATE 2013-07-23	08B0-1X1T-06-F PATENTED	FILE NAME 08B01X1T06-F_D.DWG	.XX		SCALE : N/A	SIZE : A4	
				.XXX	±0.004		PAGE : 5	