

ERDOOR ER-PWR-1001 FIRE RESISTANT DOOR

Technical Specification – Fire-Resistant WPC Composite Door

1. General Description

This specification covers the requirements for fire-resistant WPC composite doors designed for enhanced fire safety and structural durability.

2. Materials

- Wood Material: Hard wood is used instead of softwood (gök nar).
- Door Leaf Surface: 3 mm fire-resistant MDF panel, replacing standard PVC sheets.
- Core Filling: 38 mm fire-resistant chipboard with okal core, replacing honeycomb-foam-okal fillings.

3. Fire-Resistant Components

- Seals: Fire-resistant brush seals installed on the side edges of the leaf (middle band section).
- Frame Gaskets: Fire-resistant gaskets provided in place of standard sealing gaskets.
- Metal Interface Gaskets: Fire-resistant gaskets placed between all metal components and other door surfaces.
- Drop-Down Seal: Fire-resistant drop-down seal integrated at the bottom of the leaf.
- Door Closer: Fire-resistant external door closer located on the upper rear side of the leaf.
- Hinges: Three (3) fire-resistant hinges.
- Peephole: One (1) fire-resistant peephole.
- Lock: One (1) fire-resistant lock.

4. Installation Requirements

Only fire-resistant foam and fire-resistant sealant must be used during installation.

5. Compliance

All components shall comply with applicable fire safety standards and be tested according to recognized fire resistance classifications.

FIRE-RESISTANT DOOR DETAIL



DOOR CLOSER



LAYERS



LOCK



HINGE




DROP SEAL



PEEPHOLE



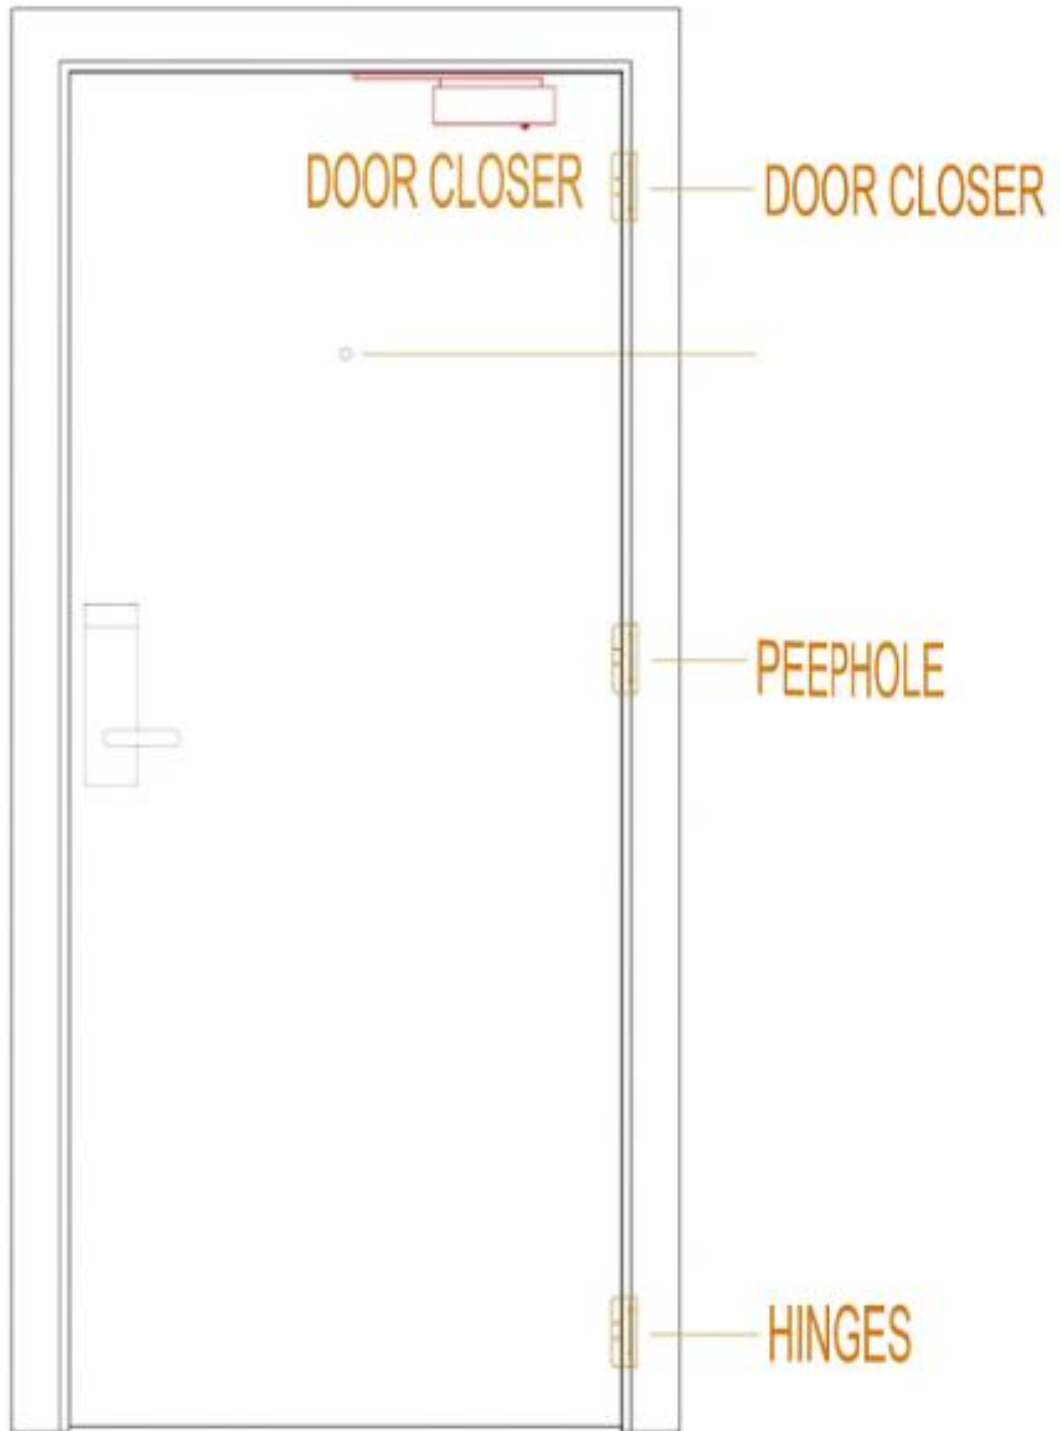

FROM FRONT