

Laboratory 3

Full Custom And Or Inverter(AOI) Layout

Satya Raviteja Erpina, Haranadh Chintapalli, Soma Sai Charitha

Group Number - 5

Date – 2/24/2017

Introduction and Physical Properties

Cell Description

AOI logic is a two-level compound logic functions constructed from the combination of one or more AND gates followed by a NOR gate. In this report we discuss about the AOI with the below logic function:


$$Q = \sim(AB + C)$$

where Q is output and A, B, C are input.

AND operation is done on A and B. OR operation is done on AB and C. NOT operation is done on $AB + C$.

The AOI logics are employed in the circuit design because their construction using MOSFET's is simpler and more efficient than the sum of individual gates. As a result, it is faster and consumes lesser power. Its size is smaller and as a result, the fabrication cost is minimal.

CELL SYMBOL

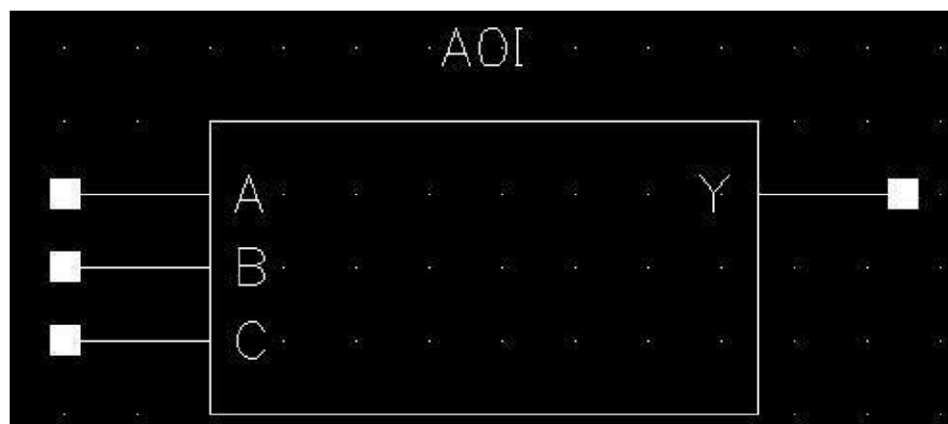

Laboratory 3

Cell Truth Table

Truth table of AOI is as shown below. Logic function is same as that of Inverter.

$$Q = \sim (AB + C)$$

Where Q is output and A,B,C are input.

CELL INPUTS			CELL OUTPUTS	
A	B	C		
0	0	0	H	1
0	0	1	L	0
0	1	0	H	1
0	1	1	L	0
1	0	0	H	1
1	0	1	L	0
1	1	0	L	0
1	1	1	L	0

Table 1: AOI truth table

Input and Output Parasitic Capacitance Table

From the schematic calculate each input's capacitance normalized to the nominal inverter (your inverter standard cell) by the width of the transistor or drain area as needed. This entry should be an integer fraction similar to Weste and Harris.

[Note the normalization is to a standard inverter (the standard cell inverter INV1X). Repeat the rows as needed.]

Computed Cell Input Capacitance	
Input Name	Capacitance (/Cinv)
Output Name	Capacitance (/Cinv)

Laboratory 3

Performance Analysis

Rise and Fall Times

[Note: It is highly desirable to split the simulation work load among the team members so that each team member learns how to use the tools.]

FOx denotes output loads. The loads are defined by the number of identical logic gates. Use 20%-80% swings for the output rise and fall entries. Use a 1.2V power supply.

For each output load in the table complete transient simulations. Remember to include a CMOS non-inverting buffer between the ideal voltage source and the logic gate driving the FOx load. Note rise t_r / fall t_f times are at the input to the logic gate driving the load, **not** the rise/fall times for the input ideal voltage source.

Complete the number needed copies (copies = No. input stacks x No. outputs) of the table below.

For multi-input gates, complete tables for each transistor stack (i.e. each branch connected to the output) using the stack's worst case single controlling input transition in the stack. Label the tables with worst case input in each stack and the output. Replace **X** below with the signal name.

Input X: Output Rise Time Data t_r (ns)					
Input rise/fall time (ns)	Output Load (FOx)				
	0	1	2	4	8
0.04					
0.06					

Stack Input Combination: *Replace with Boolean Product*

Stack S, Input X: Output Fall Time Data t_f (ns)
--

Laboratory 3

Input rise/fall time (ns)	Output Load (FOx)				
	0	1	2	4	8
0.04					
0.06					

Stack Input Combination: ***Replace with Boolean Product***

Propagation Delays

For the range of output loads shown in the table simulate propagation delays (low to high t_{plh} and high to low t_{phl}) for the stack's worst case single controlling input transition. The input controlling the output is the same input reported in the rise and fall time section. Use a 1.2V power supply and timing measurements start when input to the logic gate driving the FOx load crosses the 50% of the rail and stop when the logic gate driving output crosses 50% of the rail. Negative values are entered as 0.

Label the tables with the Boolean product (e.g. AB) of the transistor stack and the output. Complete copies of the table below for each branch connected to the output.

Data Worst Case Low to High Propagation Delay Data t_{plh} (ns)					
Input rise/fall time (ns)	Output Load (FOx)				
	0	1	2	4	8
0.04					
0.06					

Worse Case Input Combination: ***Replace with Boolean Product***

Data Worst Case High to Low Propagation Delay Data t_{phl} (ns)					
Input rise/fall time (ns)	Output Load (FOx)				
	0	1	2	4	8
0.04					
0.06					

Worse Case Input Combination: ***Replace with Boolean Product***

From each row of the slew rate data compute the best fit linear propagation delay equation for low-to-high T_{plh} (h) and high-to-low T_{phl} (h). The model predicts a

Laboratory 3

delay, in nanoseconds, as a function of the output load, h , $C_{out}/C_{in} = FOx$. The model line is parameterized by a slope, m , and an intercept, b . The units of m are (ns/FOx) and the units of b are ns .

Complete the table below by increasing the number of rows for multiple input gates. The row labeled **All data** is the computed slope and intercept after combining data from all slew rates.

Complete the **Model** row for the gate using the assumptions and methods of the linear delay model from Weste and Harris. Only skewed standard cells will have different values propagation models for rising and falling inputs.

All data means combine the results for both slew rates into a single model.

Discuss in your own words the differences in the calibration and the Weste Harris linear delay model. Discuss the differences in high-to-low versus low-to-high models.

Data Model Propagation Delay Equation				
$T_{pd}(h) = b + m \cdot h$				
Input Slew Rate (ns)	Rising Logical Effort (m_r)	Falling Logical Effort (m_f)	Parasitic Rising Delay (b_r)	Parasitic Falling Delay (b_f)
0.04				
0.06				
All data				

In the table below normalize the model for the $T_{pd}(h)$ results of the table above to give the logical effort model $D(h)$ described in Weste and Harris. $D(h)$ is a unitless value and predicts the delay as multiples of the standard inverter delay.

Normalization is based on the observed CMOS inverter parasitic delay, b_{inv} . Recall **all data** $p_{inv} \approx 1$.

Laboratory 3

Inverter Normalized Data Model Propagation Delay Equation				
$D(h) = p + g \cdot h$				
Input Slew Rate (ns)	Rising Logical Effort (g_r)	Falling Logical Effort (g_f)	Parasitic Rising Delay (p_r)	Parasitic Falling Delay
0.04				
0.06				
All data				
W&H Model				

Power-Delay

Simulate the cell for a sequence of input combinations based on the Gray code and compute the time averaged power (mW), average delay (ns), and average powerdelay product (mW ns = pJ). The Gray code restricts the simulations to single input transitions and ignores the large number of multiple input change combinations. Use the same slew rate for all input transitions. Use equal output loads for multiple output gates. Use a period of 2X maximum output delay with FO=8.

Average Power Data (mW)					
Input Slew (ns)	Output Load (FOx)				
	0	1	2	4	8
0.04					
0.06					

Average Delay Data (ns)					
Input Slew (ns)	Output Load (FOx)				
	0	1	2	4	8
0.04					
0.06					

Average Power-Delay Data (pJ)					
-------------------------------	--	--	--	--	--

Laboratory 3

Input Slew (ns)	Output Load (FOx)				
	0	1	2	4	8
0.04					
0.06					

Schematic diagram

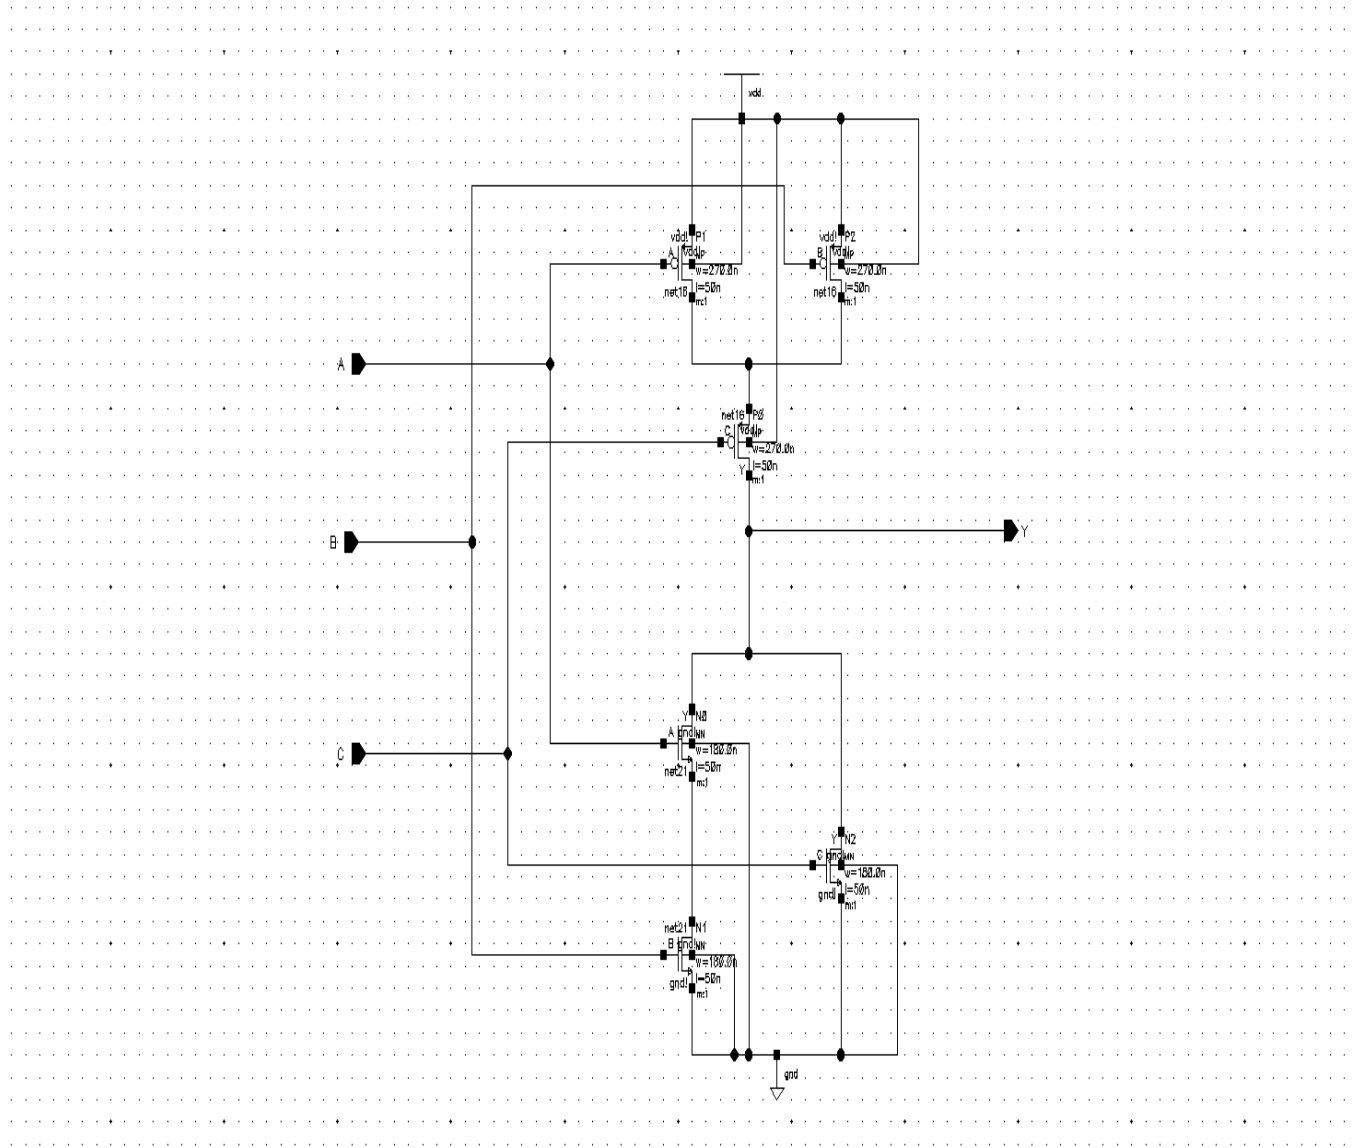


Figure 1 : Schematic diagram of AOI Custom

Laboratory 3

Transistor Dimensions

Save a color or black and white layout of the cell in EPS (i.e. Encapsulated Postscript) format. The cell dimensions are saved in both lambda (λ) and microns (μm). Record the transistor length and width dimensions (nm).
[Repeat the transistor row as needed.]

Cell Physical Dimensions		
	X	Y
Cell Dimension in λ		
Cell Dimension in μm		
Transistor Dimensions		
UNIT Name	Length (nm)	Width (nm)
NMOS N0, N1, N2	50	180
PMOS P0, P1, P2	50	270

Table 2: AOI Transistor dimensions

Laboratory 3

Cell Layout

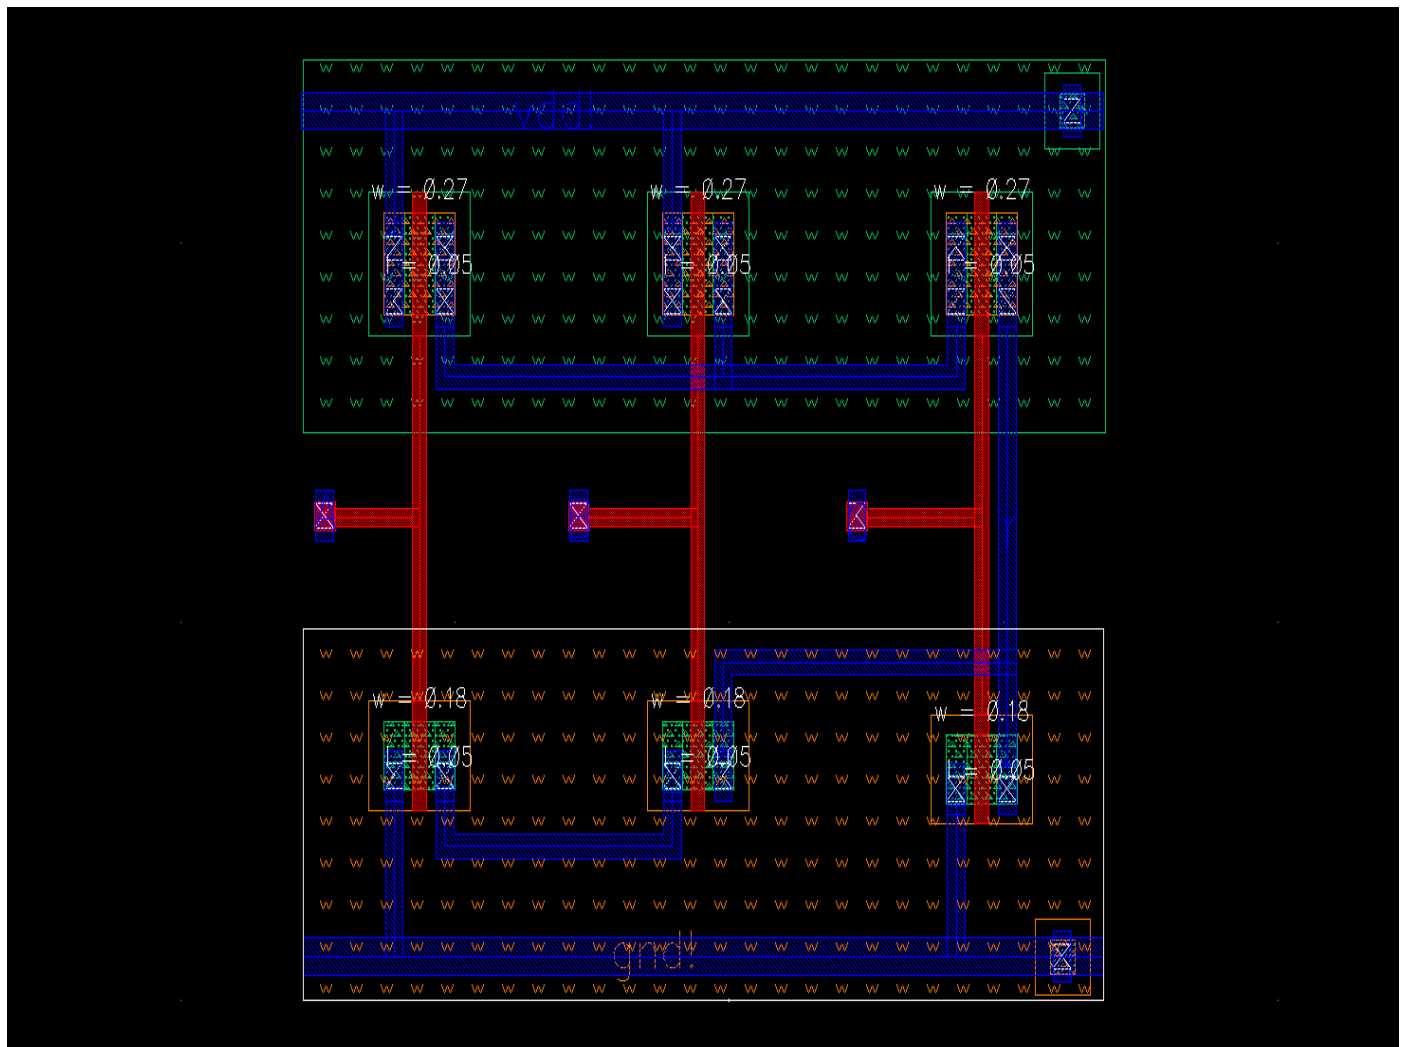


Figure 2 : Layout diagram of AOI full custom

DRC REPORT

```
=====
=====
=== CALIBRE::DRC-F SUMMARY REPORT
===
Execution Date/Time:      Wed Feb 22 22:47:29 2017
Calibre Version:         v2013.2_35.25      Wed Jul 3 15:43:57 PDT 2013
```

Laboratory 3

Rule File Pathname: /u/erpina/cadence/DRC-files/_calibreDRC.rul_
Rule File Title:
Layout System: GDS
Layout Path(s): AOI.calibre.db
Layout Primary Cell: AOI
Current Directory: /u/erpina/cadence/DRC-files
User Name: erpina
Maximum Results/RuleCheck: 1000
Maximum Result Vertices: 4096
DRC Results Database: AOI.drc.results (ASCII)
Layout Depth: ALL
Text Depth: PRIMARY
Summary Report File: AOI.drc.summary (REPLACE)
Geometry Flagging: ACUTE = NO SKEW = NO ANGLED = NO OFFGRID = NO
NONSIMPLE POLYGON = NO NONSIMPLE PATH = NO

Excluded Cells:
CheckText Mapping: COMMENT TEXT + RULE FILE INFORMATION
Layers: MEMORY-BASED
Keep Empty Checks: YES

--- RUNTIME WARNINGS

--- ORIGINAL LAYER STATISTICS

LAYER pwell	TOTAL	Original	Geometry	Count = 5
LAYER nwell	TOTAL	Original	Geometry	Count = 5
LAYER active	TOTAL	Original	Geometry	Count = 44
LAYER poly	TOTAL	Original	Geometry	Count = 27
LAYER pimplant	...	TOTAL	Original	Geometry	Count = 4
LAYER nimplant	...	TOTAL	Original	Geometry	Count = 4
LAYER vth	TOTAL	Original	Geometry	Count = 0
LAYER vtg	TOTAL	Original	Geometry	Count = 0
LAYER metall	TOTAL	Original	Geometry	Count = 28
LAYER metal2	TOTAL	Original	Geometry	Count = 0
LAYER metal3	TOTAL	Original	Geometry	Count = 0
LAYER metal4	TOTAL	Original	Geometry	Count = 0
LAYER metal5	TOTAL	Original	Geometry	Count = 0
LAYER metal6	TOTAL	Original	Geometry	Count = 0
LAYER metal7	TOTAL	Original	Geometry	Count = 0
LAYER metal8	TOTAL	Original	Geometry	Count = 0
LAYER metal9	TOTAL	Original	Geometry	Count = 0
LAYER metal10	TOTAL	Original	Geometry	Count = 0
LAYER contact	TOTAL	Original	Geometry	Count = 23
LAYER via1	TOTAL	Original	Geometry	Count = 0
LAYER via2	TOTAL	Original	Geometry	Count = 0
LAYER via3	TOTAL	Original	Geometry	Count = 0
LAYER via4	TOTAL	Original	Geometry	Count = 0
LAYER via5	TOTAL	Original	Geometry	Count = 0
LAYER via6	TOTAL	Original	Geometry	Count = 0
LAYER via7	TOTAL	Original	Geometry	Count = 0

Laboratory 3

LAYER via8 TOTAL Original Geometry Count = 0
LAYER via9 TOTAL Original Geometry Count = 0

--- RULECHECK RESULTS STATISTICS

RULECHECK Well.1 TOTAL Result Count = 0
RULECHECK Well.2 TOTAL Result Count = 0
RULECHECK Well.4 TOTAL Result Count = 0
RULECHECK Poly.1 TOTAL Result Count = 0
RULECHECK Poly.2 TOTAL Result Count = 0
RULECHECK Poly.3 TOTAL Result Count = 0
RULECHECK Poly.4 TOTAL Result Count = 0
RULECHECK Poly.5 TOTAL Result Count = 0
RULECHECK Poly.6 TOTAL Result Count = 0
RULECHECK Active.1 TOTAL Result Count = 0
RULECHECK Active.2 TOTAL Result Count = 0
RULECHECK Active.3 TOTAL Result Count = 0
RULECHECK Active.4 TOTAL Result Count = 0
RULECHECK Implant.1 ... TOTAL Result Count = 0
RULECHECK Implant.2 ... TOTAL Result Count = 0
RULECHECK Implant.3 ... TOTAL Result Count = 0
RULECHECK Implant.4 ... TOTAL Result Count = 0
RULECHECK Implant.6 ... TOTAL Result Count = 0
RULECHECK Contact.1 ... TOTAL Result Count = 0
RULECHECK Contact.2 ... TOTAL Result Count = 0
RULECHECK Contact.3 ... TOTAL Result Count = 0
RULECHECK Contact.4 ... TOTAL Result Count = 0
RULECHECK Contact.5 ... TOTAL Result Count = 0
RULECHECK Contact.6 ... TOTAL Result Count = 0
RULECHECK Metall1.1 TOTAL Result Count = 0
RULECHECK Metall1.2 TOTAL Result Count = 0
RULECHECK Metall1.3 TOTAL Result Count = 0
RULECHECK Metall1.4 TOTAL Result Count = 0
RULECHECK Vial1.1 TOTAL Result Count = 0
RULECHECK Vial1.2 TOTAL Result Count = 0
RULECHECK Vial1.3 TOTAL Result Count = 0
RULECHECK Vial1.4 TOTAL Result Count = 0
RULECHECK Metal2.1 TOTAL Result Count = 0
RULECHECK Metal2.2 TOTAL Result Count = 0
RULECHECK Metal2.3 TOTAL Result Count = 0
RULECHECK Metal2.4 TOTAL Result Count = 0
RULECHECK Via2.1 TOTAL Result Count = 0
RULECHECK Via2.2 TOTAL Result Count = 0
RULECHECK Via2.3 TOTAL Result Count = 0
RULECHECK Via2.4 TOTAL Result Count = 0
RULECHECK Metal3.1 TOTAL Result Count = 0
RULECHECK Metal3.2 TOTAL Result Count = 0
RULECHECK Metal3.3 TOTAL Result Count = 0
RULECHECK Metal3.4 TOTAL Result Count = 0
RULECHECK Via3.1 TOTAL Result Count = 0
RULECHECK Via3.2 TOTAL Result Count = 0
RULECHECK Via3.3 TOTAL Result Count = 0

Laboratory 3

```
RULECHECK Via3.4 ..... TOTAL Result Count = 0
RULECHECK Metal4.1 .... TOTAL Result Count = 0
RULECHECK Metal4.2 .... TOTAL Result Count = 0
RULECHECK Metal4.3 .... TOTAL Result Count = 0
RULECHECK Via4.1 ..... TOTAL Result Count = 0
RULECHECK Via4.2 ..... TOTAL Result Count = 0
RULECHECK Via4.3 ..... TOTAL Result Count = 0
RULECHECK Via4.4 ..... TOTAL Result Count = 0
RULECHECK Metal5.1 .... TOTAL Result Count = 0
RULECHECK Metal5.2 .... TOTAL Result Count = 0
RULECHECK Metal5.3 .... TOTAL Result Count = 0
RULECHECK Via5.1 ..... TOTAL Result Count = 0
RULECHECK Via5.2 ..... TOTAL Result Count = 0
RULECHECK Via5.3 ..... TOTAL Result Count = 0
RULECHECK Via5.4 ..... TOTAL Result Count = 0
RULECHECK Metal6.1 .... TOTAL Result Count = 0
RULECHECK Metal6.2 .... TOTAL Result Count = 0
RULECHECK Metal6.3 .... TOTAL Result Count = 0
RULECHECK Via6.1 ..... TOTAL Result Count = 0
RULECHECK Via6.2 ..... TOTAL Result Count = 0
RULECHECK Via6.3 ..... TOTAL Result Count = 0
RULECHECK Via6.4 ..... TOTAL Result Count = 0
RULECHECK Metal7.1 .... TOTAL Result Count = 0
RULECHECK Metal7.2 .... TOTAL Result Count = 0
RULECHECK Metal7.3 .... TOTAL Result Count = 0
RULECHECK Via7.1 ..... TOTAL Result Count = 0
RULECHECK Via7.2 ..... TOTAL Result Count = 0
RULECHECK Via7.3 ..... TOTAL Result Count = 0
RULECHECK Via7.4 ..... TOTAL Result Count = 0
RULECHECK Metal8.1 .... TOTAL Result Count = 0
RULECHECK Metal8.2 .... TOTAL Result Count = 0
RULECHECK Metal8.3 .... TOTAL Result Count = 0
RULECHECK Via8.1 ..... TOTAL Result Count = 0
RULECHECK Via8.2 ..... TOTAL Result Count = 0
RULECHECK Via8.3 ..... TOTAL Result Count = 0
RULECHECK Via8.4 ..... TOTAL Result Count = 0
RULECHECK Metal9.1 .... TOTAL Result Count = 0
RULECHECK Metal9.2 .... TOTAL Result Count = 0
RULECHECK Metal9.3 .... TOTAL Result Count = 0
RULECHECK Via9.1 ..... TOTAL Result Count = 0
RULECHECK Via9.2 ..... TOTAL Result Count = 0
RULECHECK Via9.3 ..... TOTAL Result Count = 0
RULECHECK Via9.4 ..... TOTAL Result Count = 0
RULECHECK Metal10.1 ... TOTAL Result Count = 0
RULECHECK Metal10.2 ... TOTAL Result Count = 0
RULECHECK Metal10.3 ... TOTAL Result Count = 0
RULECHECK Metal11.5 .... TOTAL Result Count = 0
RULECHECK Metal11.6 .... TOTAL Result Count = 0
RULECHECK Metal11.7 .... TOTAL Result Count = 0
RULECHECK Metal11.8 .... TOTAL Result Count = 0
RULECHECK Metal11.9 .... TOTAL Result Count = 0
RULECHECK Metal12.5 .... TOTAL Result Count = 0
RULECHECK Metal12.6 .... TOTAL Result Count = 0
```

Laboratory 3

```
RULECHECK Metal2.7 .... TOTAL Result Count = 0
RULECHECK Metal2.8 .... TOTAL Result Count = 0
RULECHECK Metal2.9 .... TOTAL Result Count = 0
RULECHECK Metal3.5 .... TOTAL Result Count = 0
RULECHECK Metal3.6 .... TOTAL Result Count = 0
RULECHECK Metal3.7 .... TOTAL Result Count = 0
RULECHECK Metal3.8 .... TOTAL Result Count = 0
RULECHECK Metal3.9 .... TOTAL Result Count = 0
RULECHECK Metal4.5 .... TOTAL Result Count = 0
RULECHECK Metal4.6 .... TOTAL Result Count = 0
RULECHECK Metal4.7 .... TOTAL Result Count = 0
RULECHECK Metal4.8 .... TOTAL Result Count = 0
RULECHECK Metal5.5 .... TOTAL Result Count = 0
RULECHECK Metal5.6 .... TOTAL Result Count = 0
RULECHECK Metal5.7 .... TOTAL Result Count = 0
RULECHECK Metal5.8 .... TOTAL Result Count = 0
RULECHECK Metal6.5 .... TOTAL Result Count = 0
RULECHECK Metal6.6 .... TOTAL Result Count = 0
RULECHECK Metal6.7 .... TOTAL Result Count = 0
RULECHECK Metal6.8 .... TOTAL Result Count = 0
RULECHECK Metal7.5 .... TOTAL Result Count = 0
RULECHECK Metal7.6 .... TOTAL Result Count = 0
RULECHECK Metal7.7 .... TOTAL Result Count = 0
RULECHECK Metal8.5 .... TOTAL Result Count = 0
RULECHECK Metal8.6 .... TOTAL Result Count = 0
RULECHECK Metal8.7 .... TOTAL Result Count = 0
RULECHECK Metal9.5 .... TOTAL Result Count = 0
RULECHECK Metal9.6 .... TOTAL Result Count = 0
RULECHECK Metal10.5 ... TOTAL Result Count = 0
RULECHECK Metal10.6 ... TOTAL Result Count = 0
RULECHECK Grid.1 ..... TOTAL Result Count = 0
RULECHECK Grid.2 ..... TOTAL Result Count = 0
RULECHECK Grid.3 ..... TOTAL Result Count = 0
RULECHECK Grid.4 ..... TOTAL Result Count = 0
RULECHECK Grid.5 ..... TOTAL Result Count = 0
RULECHECK Grid.6 ..... TOTAL Result Count = 0
RULECHECK Grid.7 ..... TOTAL Result Count = 0
RULECHECK Grid.8 ..... TOTAL Result Count = 0
RULECHECK Grid.9 ..... TOTAL Result Count = 0
RULECHECK Grid.10 ..... TOTAL Result Count = 0
RULECHECK Grid.11 ..... TOTAL Result Count = 0
RULECHECK Grid.12 ..... TOTAL Result Count = 0
RULECHECK Grid.13 ..... TOTAL Result Count = 0
RULECHECK Grid.14 ..... TOTAL Result Count = 0
RULECHECK Grid.15 ..... TOTAL Result Count = 0
RULECHECK Grid.16 ..... TOTAL Result Count = 0
RULECHECK Grid.17 ..... TOTAL Result Count = 0
RULECHECK Grid.18 ..... TOTAL Result Count = 0
RULECHECK Grid.19 ..... TOTAL Result Count = 0
RULECHECK Grid.20 ..... TOTAL Result Count = 0
RULECHECK Grid.21 ..... TOTAL Result Count = 0
RULECHECK Grid.22 ..... TOTAL Result Count = 0
RULECHECK Grid.23 ..... TOTAL Result Count = 0
```

Laboratory 3

RULECHECK Grid.24 TOTAL Result Count = 0
RULECHECK Grid.25 TOTAL Result Count = 0
RULECHECK Grid.26 TOTAL Result Count = 0

--- SUMMARY

TOTAL CPU Time: 0
TOTAL REAL Time: 0
TOTAL Original Layer Geometries: 140
TOTAL DRC RuleChecks Executed: 156
TOTAL DRC Results Generated: 0

LVS REPORT

```
#####  
##  
##          C A L I B R E      S Y S T E M      ##  
##  
##          L V S      R E P O R T      ##  
##  
#####
```

REPORT FILE NAME: AOI.lvs.report
LAYOUT NAME: AOI.calibre.db
SOURCE NAME: /u/erpina/cadence/LVS-files/AOI.src.net ('AOI')
RULE FILE: /u/erpina/cadence/LVS-files/_calibreLVS.rul_
RULE FILE TITLE: LVS Rule File for FreePDK45
LVS MODE: Mask
RULE FILE NAME: /u/erpina/cadence/LVS-files/_calibreLVS.rul_
CREATION TIME: Wed Feb 22 22:48:13 2017
CURRENT DIRECTORY: /u/erpina/cadence/LVS-files
USER NAME: erpina
CALIBRE VERSION: v2013.2_35.25 Wed Jul 3 15:43:57 PDT 2013

OVERALL COMPARISON RESULTS


```
          #          #####  
          #          #          *          *  
#          #          #          CORRECT          #          |
```

Laboratory 3

```

# #          #          #          \_/_/
#          #####

```

INITIAL NUMBERS OF OBJECTS

	Layout	Source	Component Type
	-----	-----	-----
Nets:	8	8	
Instances:	3	3	mn (4 pins)
	3	3	mp (4 pins)
	-----	-----	
Total Inst:	6	6	

NUMBERS OF OBJECTS AFTER TRANSFORMATION

	Layout	Source	Component Type
	-----	-----	-----
Nets:	6	6	
Instances:	1	1	mn (4 pins)
	1	1	SMN2 (4 pins)
	1	1	SPMP_2_1 (5 pins)
	-----	-----	
Total Inst:	3	3	

```

*****
*****

```

LVS PARAMETERS

```

*****
*****

```

o LVS Setup:

LVS COMPONENT TYPE PROPERTY	element
LVS COMPONENT SUBTYPE PROPERTY	model
// LVS PIN NAME PROPERTY	
LVS POWER NAME	"VDD"
LVS GROUND NAME	"VSS" "GROUND"
LVS CELL SUPPLY	NO
LVS RECOGNIZE GATES	ALL
LVS IGNORE PORTS	YES

Laboratory 3

LVS CHECK PORT NAMES	NO
LVS IGNORE TRIVIAL NAMED PORTS	NO
LVS BUILTIN DEVICE PIN SWAP	YES
LVS ALL CAPACITOR PINS SWAPPABLE	NO
LVS DISCARD PINS BY DEVICE	NO
LVS SOFT SUBSTRATE PINS	NO
LVS INJECT LOGIC	YES
LVS EXPAND UNBALANCED CELLS	YES
LVS FLATTEN INSIDE CELL	NO
LVS EXPAND SEED PROMOTIONS	NO
LVS PRESERVE PARAMETERIZED CELLS	NO
LVS GLOBALS ARE PORTS	YES
LVS REVERSE WL	NO
LVS SPICE PREFER PINS	NO
LVS SPICE SLASH IS SPACE	YES
LVS SPICE ALLOW FLOATING PINS	YES
// LVS SPICE ALLOW INLINE PARAMETERS	
LVS SPICE ALLOW UNQUOTED STRINGS	NO
LVS SPICE CONDITIONAL LDD	NO
LVS SPICE CULL PRIMITIVE SUBCIRCUITS	NO
LVS SPICE IMPLIED MOS AREA	NO
// LVS SPICE MULTIPLIER NAME	
LVS SPICE OVERRIDE GLOBALS	NO
LVS SPICE REDEFINE PARAM	NO
LVS SPICE REPLICATE DEVICES	NO
LVS SPICE SCALE X PARAMETERS	NO
LVS SPICE STRICT WL	NO
// LVS SPICE OPTION	
LVS STRICT SUBTYPES	NO
LVS EXACT SUBTYPES	NO
LAYOUT CASE	NO
SOURCE CASE	NO
LVS COMPARE CASE	NO
LVS DOWNCASE DEVICE	NO
LVS REPORT MAXIMUM	50
LVS PROPERTY RESOLUTION MAXIMUM	32
// LVS SIGNATURE MAXIMUM	
// LVS FILTER UNUSED OPTION	
// LVS REPORT OPTION	
LVS REPORT UNITS	YES
// LVS NON USER NAME PORT	
// LVS NON USER NAME NET	
// LVS NON USER NAME INSTANCE	
// Reduction	
LVS REDUCE SERIES MOS	YES
LVS REDUCE PARALLEL MOS	YES
LVS REDUCE SEMI SERIES MOS	YES
LVS REDUCE SPLIT GATES	YES
LVS REDUCE PARALLEL BIPOLAR	YES
LVS REDUCE SERIES CAPACITORS	YES
LVS REDUCE PARALLEL CAPACITORS	YES

Laboratory 3

```
LVS REDUCE SERIES RESISTORS      YES
LVS REDUCE PARALLEL RESISTORS    YES
LVS REDUCE PARALLEL DIODES       YES
LVS REDUCTION PRIORITY           PARALLEL
```

```
LVS SHORT EQUIVALENT NODES      NO
```

```
// Trace Property
```

```
TRACE PROPERTY mn(nmos_vtl) 1 1 4e-09 ABSOLUTE
TRACE PROPERTY mn(nmos_vtl) w w 4e-09 ABSOLUTE
TRACE PROPERTY mp(pmos_vtl) 1 1 4e-09 ABSOLUTE
TRACE PROPERTY mp(pmos_vtl) w w 4e-09 ABSOLUTE
TRACE PROPERTY mn(nmos_vth) 1 1 4e-09 ABSOLUTE
TRACE PROPERTY mn(nmos_vth) w w 4e-09 ABSOLUTE
TRACE PROPERTY mp(pmos_vth) 1 1 4e-09 ABSOLUTE
TRACE PROPERTY mp(pmos_vth) w w 4e-09 ABSOLUTE
TRACE PROPERTY mn(nmos_vtg) 1 1 4e-09 ABSOLUTE
TRACE PROPERTY mn(nmos_vtg) w w 4e-09 ABSOLUTE
TRACE PROPERTY mp(pmos_vtg) 1 1 4e-09 ABSOLUTE
TRACE PROPERTY mp(pmos_vtg) w w 4e-09 ABSOLUTE
TRACE PROPERTY mn(nmos_thkox) 1 1 4e-09 ABSOLUTE
TRACE PROPERTY mn(nmos_thkox) w w 4e-09 ABSOLUTE
TRACE PROPERTY mp(pmos_thkox) 1 1 4e-09 ABSOLUTE
TRACE PROPERTY mp(pmos_thkox) w w 4e-09 ABSOLUTE
```

```
*****
*****
```

INFORMATION AND WARNINGS

```
*****
*****
```

	Matched Layout	Matched Source	Unmatched Layout	Unmatched Source	Component Type
	-----	-----	-----	-----	-----
Nets:	6	6	0	0	
Instances:	1	1	0	0	
mn (NMOS_VTL)	1	1	0	0	SMN2
	1	1	0	0	SPMP_2_1
	-----	-----	-----	-----	
Total Inst:	3	3	0	0	

o Initial Correspondence Points:

```
Nets:      vdd! C B A Y
```

Laboratory 3

SUMMARY

Total CPU Time: 0 sec
Total Elapsed Time: 0 sec