

10292204

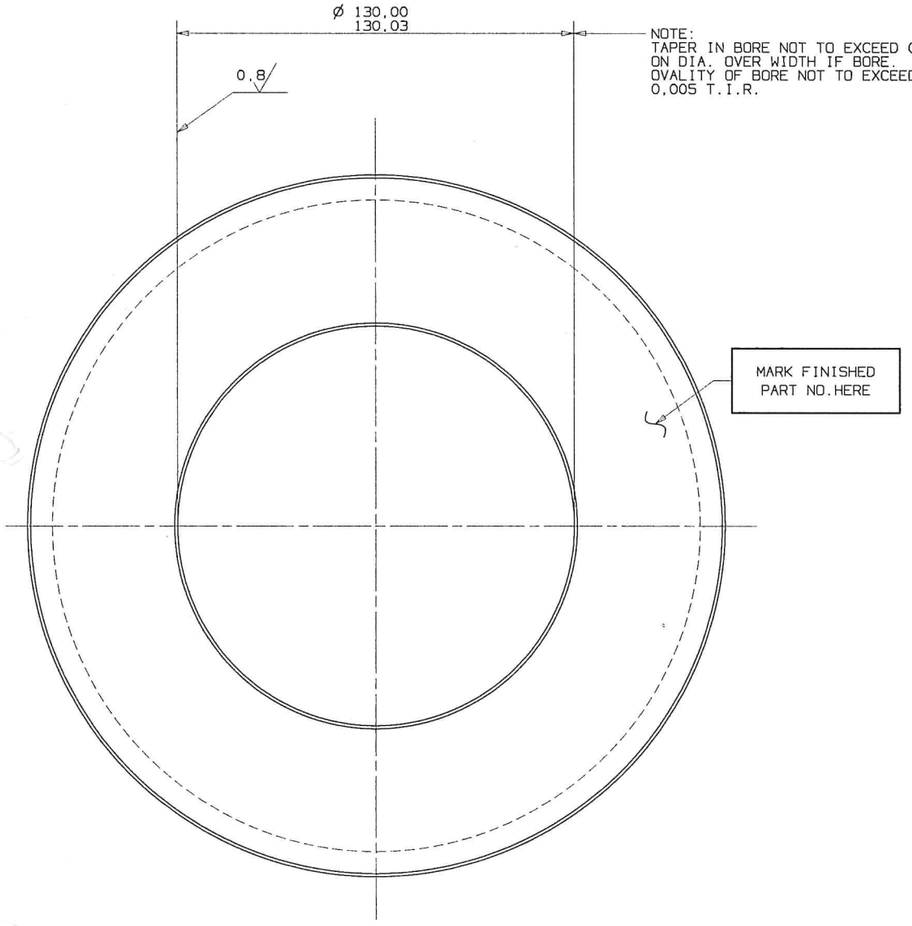

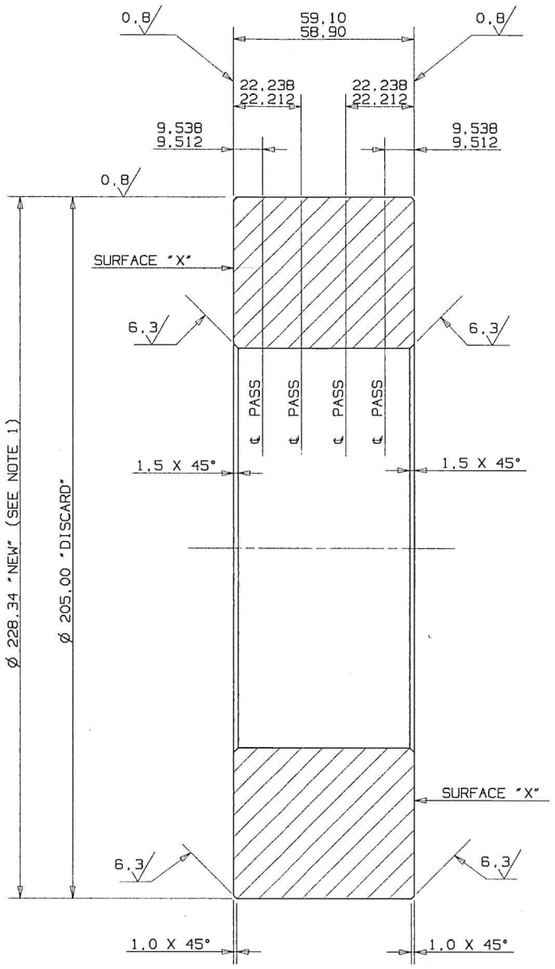

GENERAL NOTES

1. OUTSIDE DIAMETERS OF THE PAIR OF ROLLS IN ONE STAND MUST BE FINISHED TO WITHIN ±0,05 OF THE SAME DIAMETER. OUTSIDE DIAMETER AND BORE MUST BE CONCENTRIC WITHIN 0,013 T.I.R.
2. USING THE AXIS OF THE ROLL BORE AS A DATUM SURFACE "X" MUST BE SQUARE TO THE BORE WITHIN 0,008.
3. LOCALIZED POSITVE DEVIATIONS FROM FLATNESS (i.e. BUMPS) ON SURFACE "X" SHOULD NOT EXCEED 0,008.
4. BREAK ALL EDGES FOR SAFE HANDLING.
5. AFTER GRINDING OR REGRINDING PASSES, THE OUTSIDE DIAMETER AND THE NON-WORKING PASSES SHOULD BE COATED WITH "RUST VETO A-2" CORROSION INHIBITOR TO PREVENT CORROSION.

GENERAL NOTE:

OVAL PASSES ADDED TO THE ROLL
MUST CONFORM TO THE FOLLOWING REQUIREMENTS:

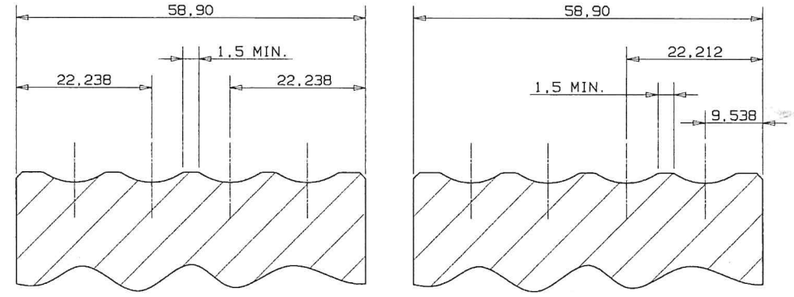


DIAGRAM "A"

A 1,5MM MINIMUM GAP MUST BE MAINTAINED BETWEEN PASS RADII RUNOUTS AT WORST TOLERANCE CONDITION. (SEE DIAGRAM "A")

GENERAL NOTE:

ROUND PASSES ADDED TO THE ROLL
MUST CONFORM TO THE FOLLOWING REQUIREMENTS:

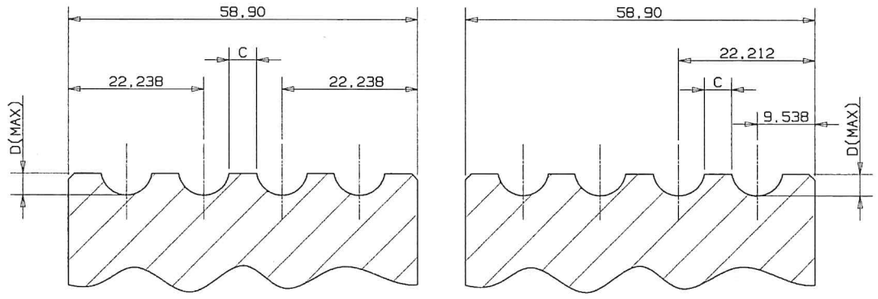


DIAGRAM "B"

THE INTERMEDIATE COLLAR (DIMENSION "C") BETWEEN PASSES MUST BE GREATER THAN OR EQUAL TO 0.85 X THE MAXIMUM DEPTH (DMAX) OF THE LARGEST PASS IN THE ROLL UNDER WORST TOLERANCE CONDITIONS.(SEE DIAGRAM "B").

"C" IS GREATER THAN OR EQUAL TO 0.85 X "D(MAX)".

NOTE:

ORIGINAL MATERIAL SINTERMET SM-59.
SUBSEQUENT MATERIAL TO BE DETERMINED BY CUSTOMER & ROLL SUPPLIER.

PASS TOLERANCES	
DEPTH	RADIUS
± 0.013	± 0.050 0.000

NOTE: SURFACES OF GROOVES TO BE FINISHED TO 0,8 - 0,4

MATERIAL: SEE NOTE			CONDITION:		
SIMILAR TO 10274060			PARTS MADE FROM THIS DWG MUST COMPLY WITH STD. MMS40073, MMS40075		THIRD ANGLE PROJECTION
DRN GGH	APP NSG		SIZE A METRIC	ROLL - 230MM U.H.D. ROLL BLANK	REV / ECN NO
CHK NSG			SCALE 1:1		A
INSP NSG			DATE 23JUL1999		FIN. WT: 22,80
					SHEET 01 OF 0


CONFIDENTIAL
THIS DRAWING IS THE PROPERTY OF MORGAN CONSTRUCTION COMPANY ("MORGAN") ACCEPTANCE OF THIS DRAWING CONSTITUTES AGREEMENT: (1) THAT IT AND ANY COPIES THEREOF SHALL NOT BE TRANSMITTED OR EXHIBITED TO OTHERS; (2) THAT IT AND ANY COPIES THEREOF SHALL BE RETURNED UPON REQUEST TO MORGAN; AND (3) THAT THE INFORMATION APPEARING HEREON IS CONFIDENTIAL AND IS NOT TO BE DISCLOSED TO OTHERS WITHOUT FIRST OBTAINING WRITTEN PERMISSION FROM MORGAN.

MORGAN WORCESTER
MORGAN CONSTRUCTION COMPANY
WORCESTER, MA. 01605 U.S.A.


1029220

SMT Mon Jul 26 07:16:39 1999

10292168

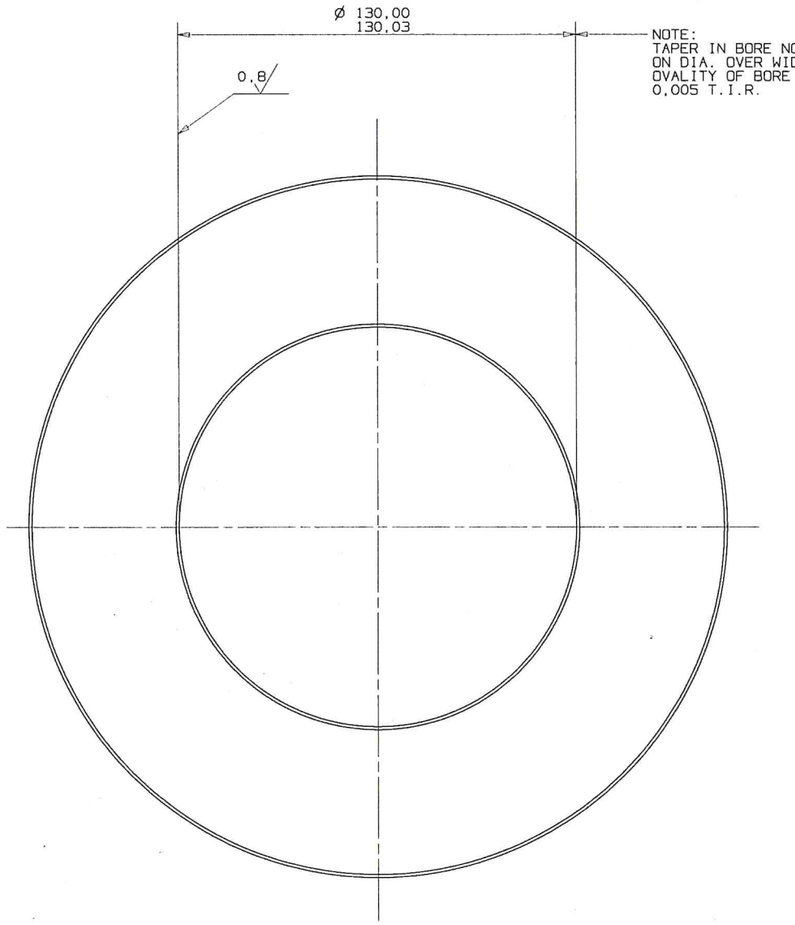

NOTE:
TAPER IN BORE NOT TO EXCEED 0,008 ON DIA. OVER WIDTH OF BORE. OVALITY OF BORE NOT TO EXCEED 0,005 T.I.R.

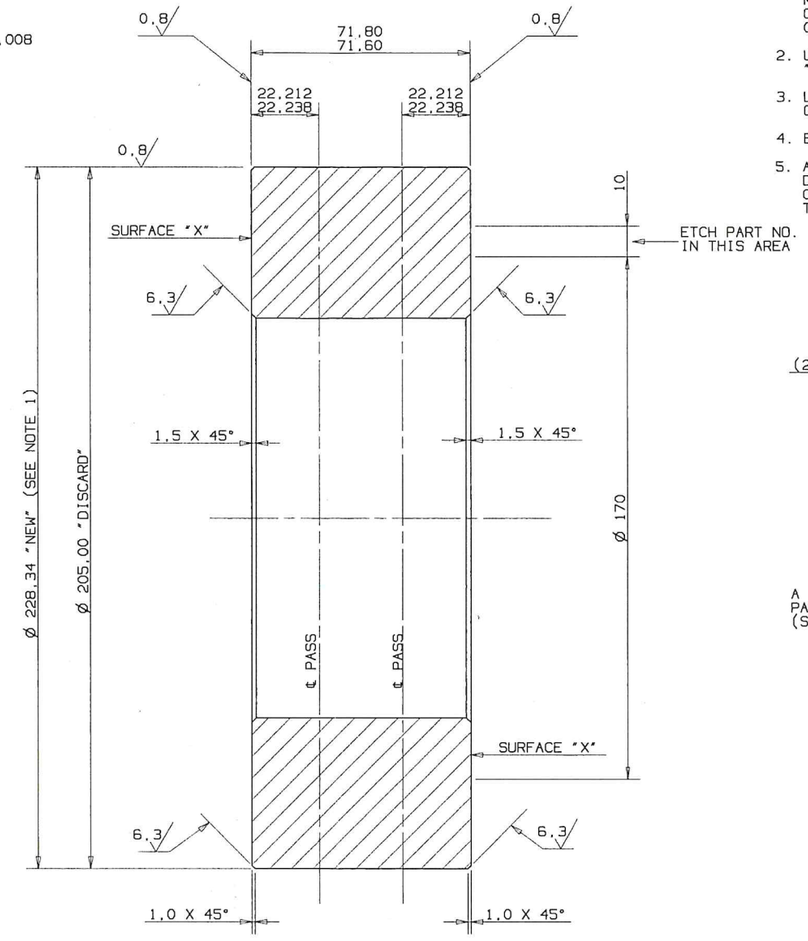

GENERAL NOTES

1. OUTSIDE DIAMETERS OF THE PAIR OF ROLLS IN ONE STAND MUST BE FINISHED TO WITHIN ±0,05 OF THE SAME DIAMETER. OUTSIDE DIAMETER AND BORE MUST BE CONCENTRIC WITHIN 0,013 T.I.R.
2. USING THE AXIS OF THE ROLL BORE AS A DATUM SURFACE "X" MUST BE SQUARE TO THE BORE WITHIN 0,008.
3. LOCALIZED POSITVE DEVIATIONS FROM FLATNESS (i.e. BUMPS) ON SURFACE "X" SHOULD NOT EXCEED 0,008.
4. BREAK ALL EDGES FOR SAFE HANDLING.
5. AFTER GRINDING OR REGRINDING PASSES, THE OUTSIDE DIAMETER AND THE NON-WORKING PASSES SHOULD BE COATED WITH "RUST VETO A-2" CORROSION INHIBITOR TO PREVENT CORROSION.

GENERAL NOTE:

OVAL PASSES ADDED TO THE ROLL MUST CONFORM TO THE FOLLOWING REQUIREMENTS:

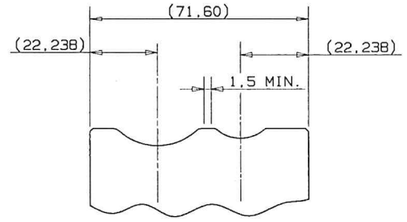


DIAGRAM "A"

A 1,5MM MINIMUM GAP MUST BE MAINTAINED BETWEEN PASS RADII RUNOUTS AT WORST TOLERANCE CONDITION. (SEE DIAGRAM "A")

GENERAL NOTE:

ROUND PASSES ADDED TO THE ROLL MUST CONFORM TO THE FOLLOWING REQUIREMENTS:

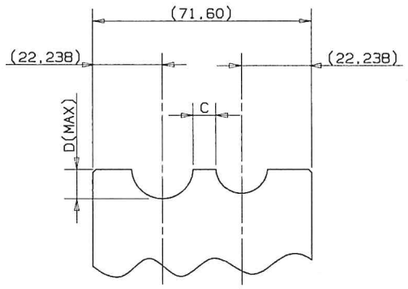


DIAGRAM "B"

THE INTERMEDIATE COLLAR (DIMENSION "C") BETWEEN PASSES MUST BE GREATER THAN OR EQUAL TO 0.85 X THE MAXIMUM DEPTH (DMAX) OF THE LARGEST PASS IN THE ROLL UNDER WORST TOLERANCE CONDITIONS.(SEE DIAGRAM "B").

"C" IS GREATER THAN OR EQUAL TO 0.85 X "D(MAX)".

NOTE:

ORIGINAL MATERIAL SINTERMET SM-60.
SUBSEQUENT MATERIAL TO BE DETERMINED BY CUSTOMER & ROLL SUPPLIER.

PASS TOLERANCES	
DEPTH	RADIUS
± 0.013	± 0.050 0.000


NOTE: SURFACES OF GROOVES TO BE FINISHED TO 0,8 - 0,4

MATERIAL: SEE NOTE			CONDITION:		
SIMILAR TO 10261517			PARTS MADE FROM THIS DWG MUST COMPLY WITH STD. MMS40073, MMS40075		THIRD ANGLE PROJECTION
DRN SJT	APP NSG	SIZE A METRIC	ROLL - 230MM U.H.D.	REV	ECN
CHK NSG		SCALE 1:1		A	
INSP NSG		DATE 24MAY1999		FIN.	


CONFIDENTIAL
THIS DRAWING IS THE PROPERTY OF MORGAN CONSTRUCTION COMPANY ("MORGAN") ACCEPTANCE OF THIS DRAWING CONSTITUTES AGREEMENT: (1) THAT IT AND ANY COPIES THEREOF SHALL NOT BE TRANSMITTED OR EXHIBITED TO OTHERS; (2) THAT IT AND ANY COPIES THEREOF SHALL BE RETURNED UPON REQUEST TO MORGAN; AND (3) THAT THE INFORMATION APPEARING HEREON IS CONFIDENTIAL AND IS NOT TO BE DISCLOSED TO OTHERS WITHOUT FIRST OBTAINING WRITTEN PERMISSION FROM MORGAN.

MORGAN WORCESTER
MORGAN CONSTRUCTION
WORCESTER, MA

1027749Z

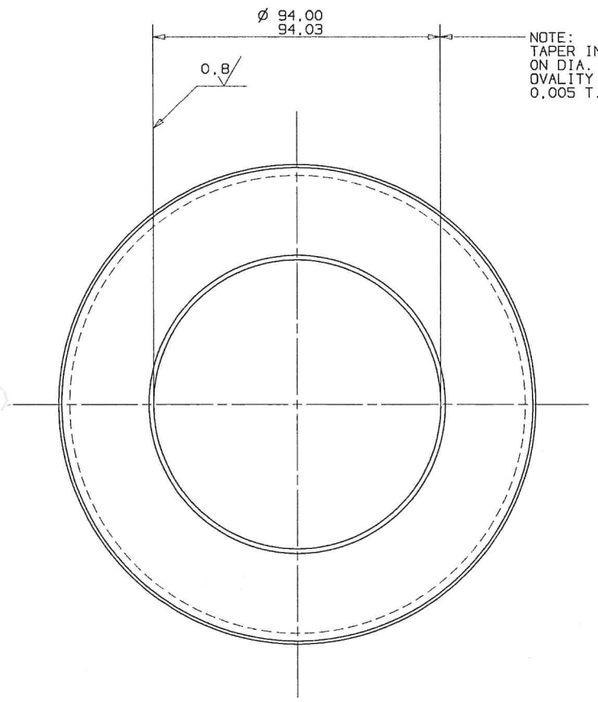

NOTE:
TAPER IN BORE NOT TO EXCEED 0,008 ON DIA. OVER WIDTH OF BORE. OVALITY OF BORE NOT TO EXCEED 0,005 T.I.R.

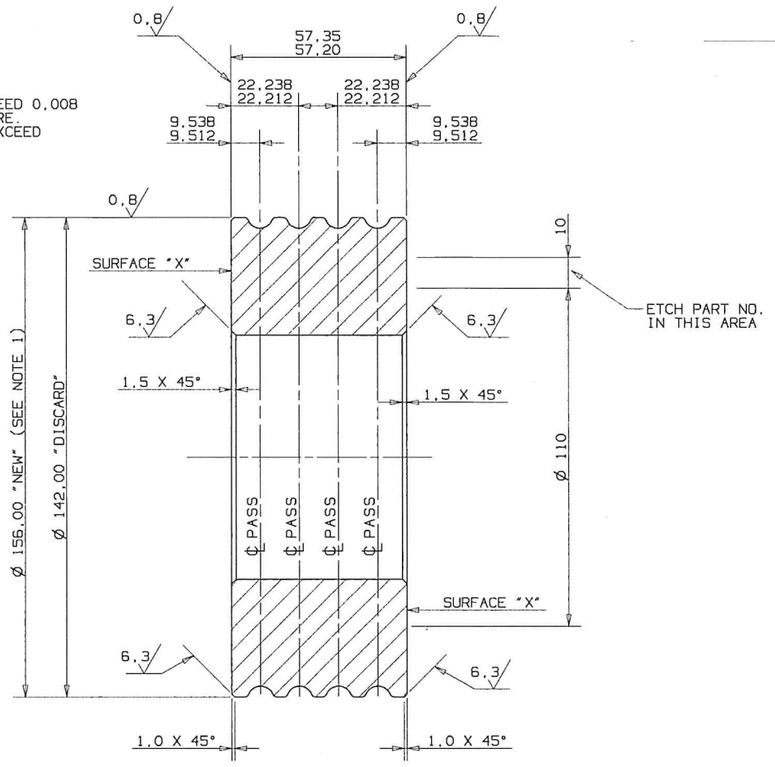

PASS TOLERANCES	
DEPTH	RADIUS
± 0.013	± 0.050 0.000

NOTE: SURFACES OF GROOVES TO BE FINISHED TO 0,8 - 0,4

GENERAL NOTES

1. OUTSIDE DIAMETERS OF THE PAIR OF ROLLS IN ONE STAND MUST BE FINISHED TO WITHIN ±0,05 OF THE SAME DIAMETER. OUTSIDE DIAMETER AND BORE MUST BE CONCENTRIC WITHIN 0,013 T.I.R.
2. USING THE AXIS OF THE ROLL BORE AS A DATUM SURFACE "X" MUST BE SQUARE TO THE BORE WITHIN 0,008.
3. LOCALIZED POSITVE DEVIATIONS FROM FLATNESS (i.e. BUMPS) ON SURFACE "X" SHOULD NOT EXCEED 0,008.
4. BREAK ALL EDGES FOR SAFE HANDLING.
5. AFTER GRINDING OR REGRINDING PASSES, THE OUTSIDE DIAMETER AND THE NON-WORKING PASSES SHOULD BE COATED WITH "RUST VETO A-2" CORROSION INHIBITOR TO PREVENT CORROSION.

GENERAL NOTE:

ROUND PASSES ADDED TO THE ROLL MUST CONFORM TO THE FOLLOWING REQUIREMENTS:

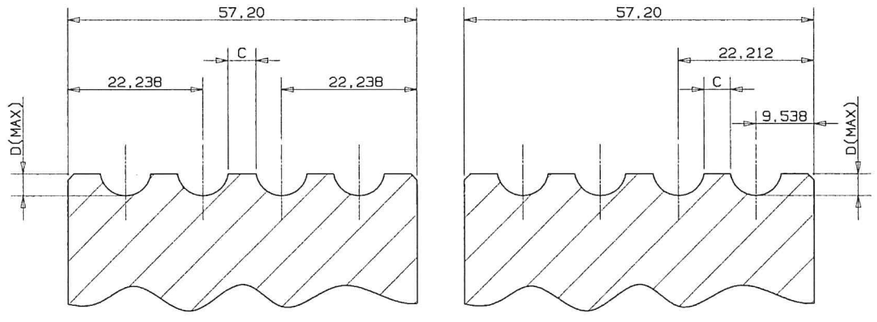


DIAGRAM "A"

THE INTERMEDIATE COLLAR (DIMENSION "C") BETWEEN PASSES MUST BE GREATER THAN OR EQUAL TO 0.85 X THE MAXIMUM DEPTH (DMAX) OF THE LARGEST PASS IN THE ROLL UNDER WORST TOLERANCE CONDITIONS. (SEE DIAGRAM "A").

"C" IS GREATER THAN OR EQUAL TO 0.85 X "D(MAX)".

NOTE:


ORIGINAL MATERIAL SINTERMET SM-59.
SUBSEQUENT MATERIAL TO BE DETERMINED BY CUSTOMER & ROLL SUPPLIER.

MATERIAL: SEE NOTE	CONDITION:				
SIMILAR TO 10265376					
DRN SJT	APP DLP	SIZE A METRIC	ROLL - 150MM CSM TABULATED DRAWING	THIRD ANGLE PROJECTION	
CHK NSG		SCALE 1:1		REV	ECN NO.
INSP NSG		DATE 13JAN1998		B	MK32
				FIN. WT:	9,7 kg
				SHEET 01 OF 0	


CONFIDENTIAL
THIS DRAWING IS THE PROPERTY OF MORGAN CONSTRUCTION COMPANY ("MORGAN") ACCEPTANCE OF THIS DRAWING CONSTITUTES AGREEMENT: (1) THAT IT AND ANY COPIES THEREOF SHALL NOT BE TRANSMITTED OR EXHIBITED TO OTHERS; (2) THAT IT AND ANY COPIES THEREOF SHALL BE RETURNED UPON REQUEST TO MORGAN; AND (3) THAT THE INFORMATION APPEARING HEREON IS CONFIDENTIAL AND IS NOT TO BE DISCLOSED TO OTHERS WITHOUT FIRST OBTAINING WRITTEN PERMISSION FROM MORGAN.

MORGAN WORCESTER
MORGAN CONSTRUCTION COMPANY
WORCESTER, MA. 01605 U.S.A.

1027749

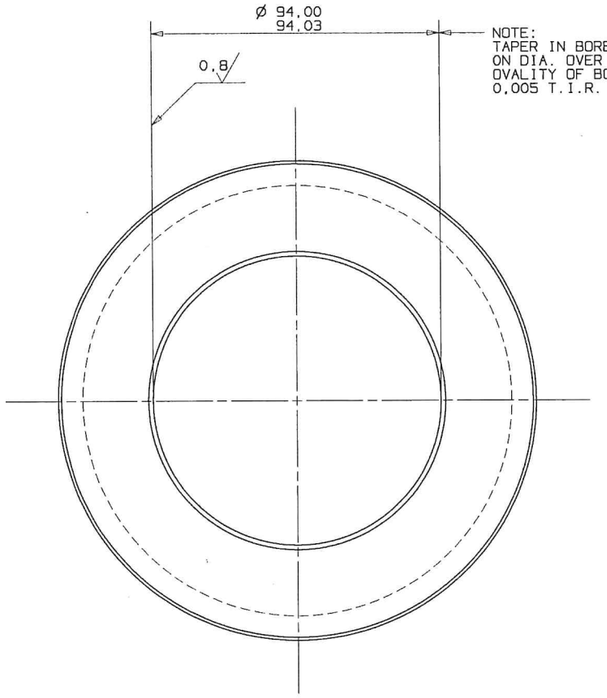

NOTE:
TAPER IN BORE NOT TO EXCEED 0,008 ON DIA. OVER WIDTH IF BORE.
OVALITY OF BORE NOT TO EXCEED 0,005 T.I.R.

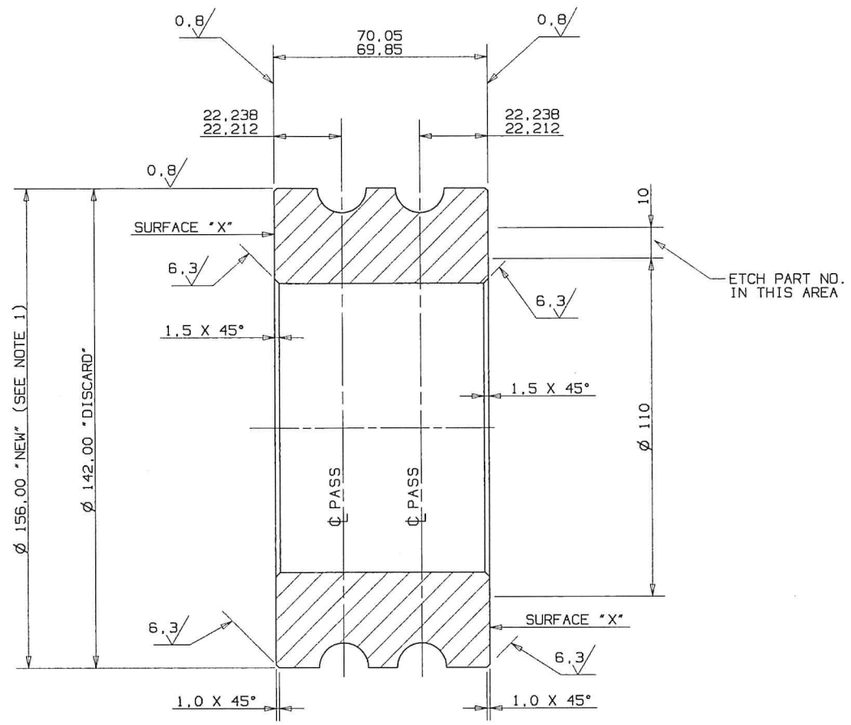

PASS TOLERANCES	
DEPTH	RADIUS
± 0.013	± 0.050 0.000

NOTE: SURFACES OF GROOVES TO BE FINISHED TO 0,8 - 0,4

GENERAL NOTES

1. OUTSIDE DIAMETERS OF THE PAIR OF ROLLS IN ONE STAND MUST BE FINISHED TO WITHIN ±0,05 OF THE SAME DIAMETER. OUTSIDE DIAMETER AND BORE MUST BE CONCENTRIC WITHIN 0,013 T.I.R.
2. USING THE AXIS OF THE ROLL BORE AS A DATUM SURFACE "X" MUST BE SQUARE TO THE BORE WITHIN 0,008.
3. LOCALIZED POSITVE DEVIATIONS FROM FLATNESS (i.e. BUMPS) ON SURFACE "X" SHOULD NOT EXCEED 0,008.
4. BREAK ALL EDGES FOR SAFE HANDLING.
5. AFTER GRINDING OR REGRINDING PASSES, THE OUTSIDE DIAMETER AND THE NON-WORKING PASSES SHOULD BE COATED WITH "RUST VETO A-2" CORROSION INHIBITOR TO PREVENT CORROSION.

GENERAL NOTE:

ROUND PASSES ADDED TO THE ROLL MUST CONFORM TO THE FOLLOWING REQUIREMENTS:

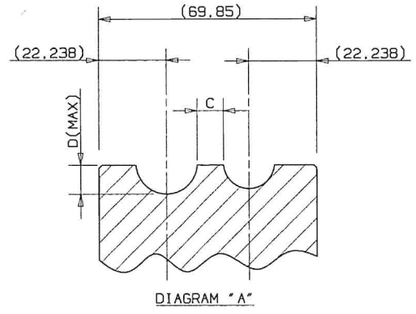


DIAGRAM "A"

THE INTERMEDIATE COLLAR (DIMENSION "C") BETWEEN PASSES MUST BE GREATER THAN OR EQUAL TO 0.85 X THE MAXIMUM DEPTH (DMAX) OF THE LARGEST PASS IN THE ROLL UNDER WORST TOLERANCE CONDITIONS.(SEE DIAGRAM "A").

"C" IS GREATER THAN OR EQUAL TO 0.85 X "D(MAX)".


NOTE:

ORIGINAL MATERIAL SINTERMET SM-59.
SUBSEQUENT MATERIAL TO BE DETERMINED BY CUSTOMER & ROLL SUPPLIER.


MATERIAL: SEE NOTE				CONDITION:	THIRD ANGLE PROJECTION
SIMILAR TO 10265377					REV: B — ECN NI MJ63
DRN SJT	APP DLP	SIZE A METRIC	ROLL - 150MM CSM		FIN. WT: 11.9
CHK NSG		SCALE 1:1			SHEET 01 OF
INSP NSG		DATE 13JAN1998			102774

CONFIDENTIAL
THIS DRAWING IS THE PROPERTY OF MORGAN CONSTRUCTION COMPANY ("MORGAN") ACCEPTANCE OF THIS DRAWING CONSTITUTES AGREEMENT: (1) THAT IT AND ANY COPIES THEREOF SHALL NOT BE TRANSMITTED OR EXHIBITED TO OTHERS; (2) THAT IT AND ANY COPIES THEREOF SHALL BE RETURNED UPON REQUEST TO MORGAN; AND (3) THAT THE INFORMATION APPEARING HEREON IS CONFIDENTIAL AND IS NOT TO BE DISCLOSED TO OTHERS WITHOUT FIRST OBTAINING WRITTEN PERMISSION FROM MORGAN.

MORGAN WORCESTER
MORGAN CONSTRUCTION COMPANY
WORCESTER, MA. 01605 U.S.A.

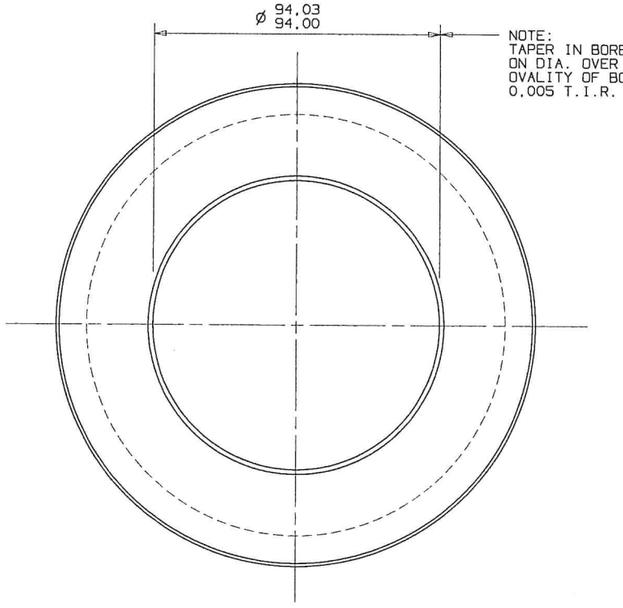

NOTE:
TAPER IN BORE NOT TO EXCEED 0,008 ON DIA. OVER WIDTH OF BORE.
OVALITY OF BORE NOT TO EXCEED 0,005 T.I.R.

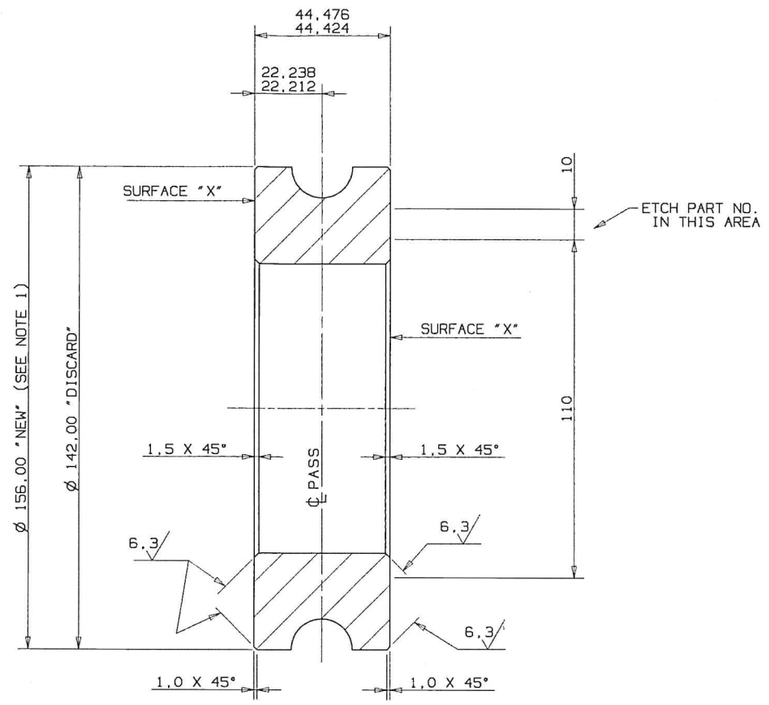

0,8 F.A.O. EXCEPT AS NOTED

Ⓑ

PASS TOLERANCES	
DEPTH	RADIUS
± 0.013	± 0.050 0.000

NOTE: SURFACES OF GROOVES TO BE FINISHED TO 0,8 - 0,4

GENERAL NOTES

1. OUTSIDE DIAMETERS OF THE PAIR OF ROLLS IN ONE STAND MUST BE FINISHED TO WITHIN ±0,05 OF THE SAME DIAMETER. OUTSIDE DIAMETER AND BORE MUST BE CONCENTRIC WITHIN 0,013 T.I.R.
2. USING THE AXIS OF THE ROLL BORE AS A DATUM SURFACE "X" MUST BE SQUARE TO THE BORE WITHIN 0,008.
3. LOCALIZED POSITVE DEVIATIONS FROM FLATNESS (i.e. BUMPS) ON SURFACE "X" SHOULD NOT EXCEED 0,008.
4. BREAK ALL EDGES FOR SAFE HANDLING.
5. AFTER GRINDING OR REGRINDING PASSES, THE OUTSIDE DIAMETER AND THE NON-WORKING PASSES SHOULD BE COATED WITH "RUST VETO A-2" CORROSION INHIBITOR TO PREVENT CORROSION.

NOTE:

ORIGINAL MATERIAL SINTERMET SM-60.
SUBSEQUENT MATERIAL TO BE DETERMINED BY CUSTOMER & ROLL SUPPLIER.

MATERIAL: SEE NOTE		CONDITION:			
SIMILAR TO 10265378		PARTS MADE FROM THIS DWG MUST COMPLY WITH STD. MMS40073, MMS40075			THIRD ANGLE PROJECTION
DRN SJT	APP DLP	SIZE A METRIC	ROLL - 150MM CSM		REV / ECN NO
CHK NSG		SCALE 1:1			B / MJ63
INSP NSG		DATE 16JAN1998			FIN. WT: 7,5

CONFIDENTIAL
THIS DRAWING IS THE PROPERTY OF MORGAN CONSTRUCTION COMPANY ("MORGAN") ACCEPTANCE OF THIS DRAWING CONSTITUTES AGREEMENT: (1) THAT IT AND ANY COPIES THEREOF SHALL NOT BE TRANSMITTED OR EXHIBITED TO OTHERS; (2) THAT IT AND ANY COPIES THEREOF SHALL BE RETURNED UPON REQUEST TO MORGAN; AND (3) THAT THE INFORMATION APPEARING HEREON IS CONFIDENTIAL AND IS NOT TO BE DISCLOSED TO OTHERS WITHOUT FIRST OBTAINING WRITTEN PERMISSION FROM MORGAN.

MORGAN WORCESTER
MORGAN CONSTRUCTION COMPANY
WORCESTER, MA. 01605 U.S.A.

SHEET 01 OF

1027749

AFT Mon Jun 14 06:14:11 1999