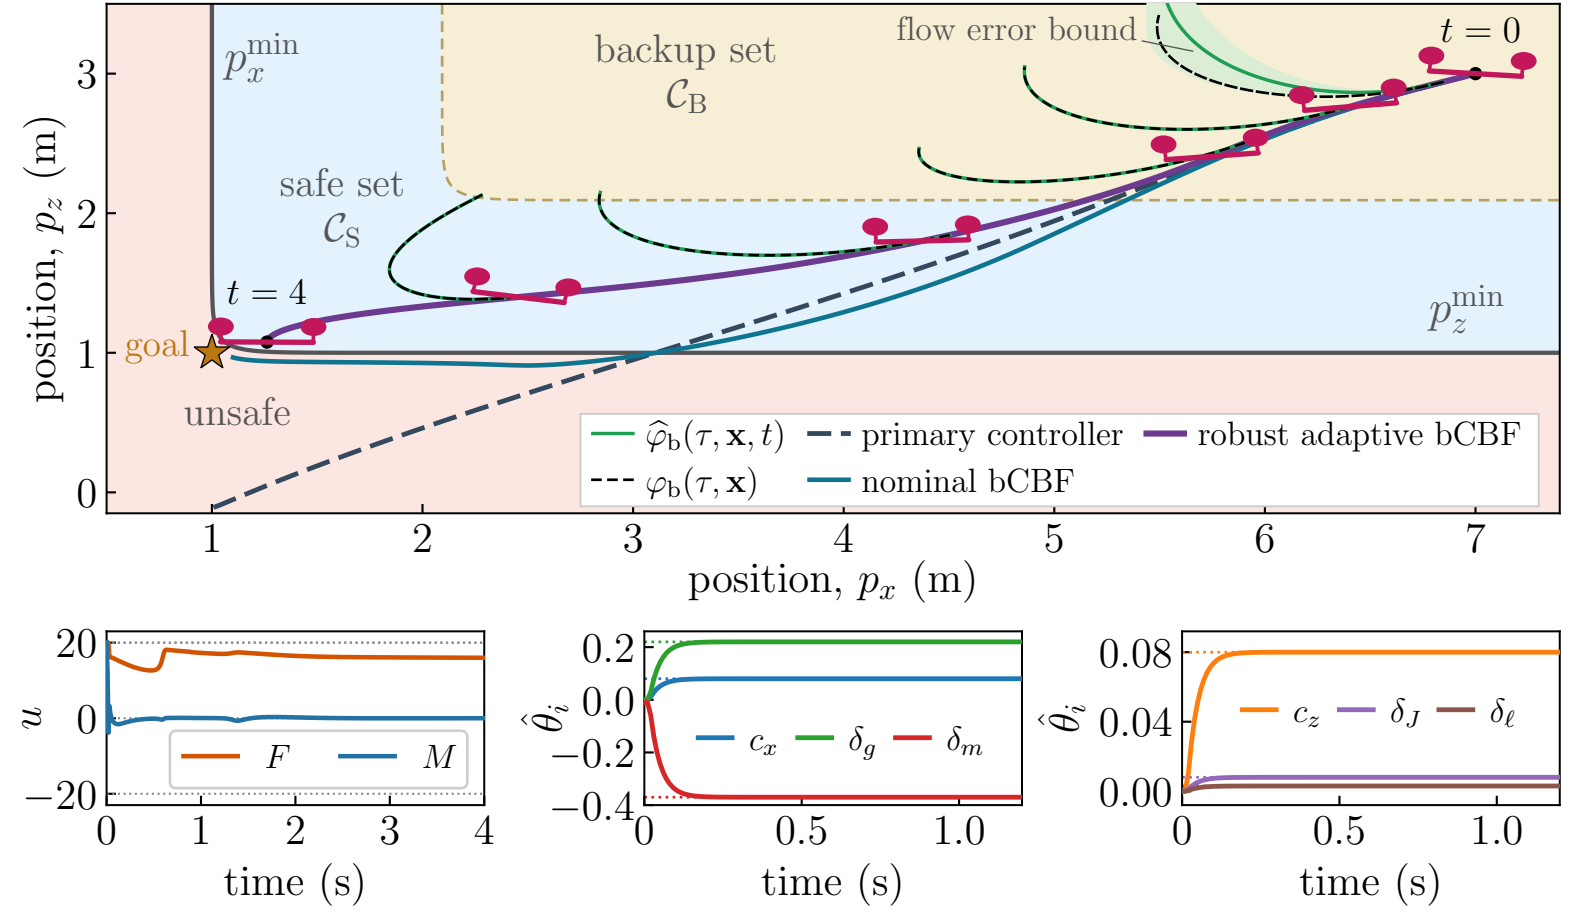

$p_x^{\min}$
backup set
$\mathcal{C}_{\mathrm{B}}$
flow error bound
$t = 0$
safe set
$\mathcal{C}_{\mathrm{S}}$
$t = 4$
goal
$p_z^{\min}$
unsafe
$\widehat{\varphi}_{\mathrm{b}}(\tau, \mathbf{x}, t)$
primary controller
robust adaptive bCBF
$\varphi_{\mathrm{b}}(\tau, \mathbf{x})$
nominal bCBF
position, p_z (m)
position, p_x (m)
u
F
M
time (s)
$\hat{\theta}_i$
c_x
δ_g
δ_m
time (s)
$\hat{\theta}_i$
c_z
δ_J
δ_ℓ
time (s)