

Ethernet to Fiber Transceiver (switch) - CWDM

- Supports standard Ethernet inputs up to 1 Gbit
- 3 port Ethernet switch (1 fiber, 2 electrical)
- Auto (10/100/1000) port speed detection
- Manually force 10Mbit electrical speed (if needed)
- Fiber transceiver speed always 1 Gbit
- Auto or manual electrical crossover selection
- Distances up to 40km (24.8 miles) over fiber
- 18 CWDM wavelength selections (ITU-T G.694.2)

The OET 1540 is a compact CWDM compatible Ethernet 3 port switch, designed to extend the reach of electrical Ethernet signals over long distances using a constant (fixed) high speed 1 Gbit optical transceiver speed.

18 selectable CWDM wavelengths are provided to enable the module to be used in a multiplexed CWDM environment. When paired with another OET 1540 at the receiving end (using two fiber links) you have a cost effective Ethernet extender system for distances up to 40km - providing a stable, high speed 1Gbit error free optical connection between locations.

The OET 1540 has two standard RJ45 electrical Ethernet ports plus fiber I/O and functions as a 3 port Ethernet switch. For legacy system use; each electrical Ethernet port can be set for automatic speed detection (10/100/1000) or forced to 10Mbit, and each port can use auto crossover detection or be forced manually if needed. These functions are available using the dip switch.

Power Adapter Options

The kit **INCLUDES** AC power supply. The power adapters below are optional.



P-TAP 1000

Use with a standard battery P-TAP power source.



XLR 1000


Use with a standard 4 pin XLR camera battery power source.

Ordering Info:

Note. The **OET 1540** price **DOES NOT INCLUDE** the fiber transceiver SFP sub module. Please specify the required wavelength from the option list below when ordering.

CWDM TX Wavelength Options (select one)

Wavelength	Power	Option #	Wavelength	Power	Option #
1270nm	+2dBm	OH-TR-54-1270	1450nm	+2dBm	OH-TR-54-1450
1290nm	+2dBm	OH-TR-54-1290	1470nm	+2dBm	OH-TR-54-1470
1310nm	+2dBm	OH-TR-54-1310	1490nm	+2dBm	OH-TR-54-1490
1330nm	+2dBm	OH-TR-54-1330	1510nm	+2dBm	OH-TR-54-1510
1350nm	+2dBm	OH-TR-54-1350	1530nm	+2dBm	OH-TR-54-1530
1370nm	+2dBm	OH-TR-54-1370	1550nm	+2dBm	OH-TR-54-1550
1390nm	+2dBm	OH-TR-54-1390	1570nm	+2dBm	OH-TR-54-1570
1410nm	+2dBm	OH-TR-54-1410	1590nm	+2dBm	OH-TR-54-1590
1430nm	+2dBm	OH-TR-54-1430	1610nm	+2dBm	OH-TR-54-1610

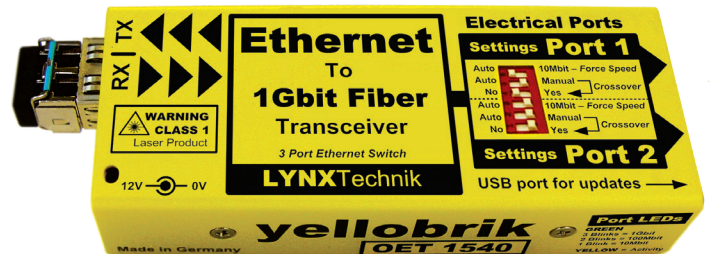


Technical Specifications


Ethernet	2 x Ethernet ports, RJ 45 Connectors. 10 BaseTUTP category 3,4 or 5 cable up to 328ft/100m (2 pairs) 100 BaseTXUTP category 5 cable up to 328ft/100m (2 pairs) 1000 BaseTXUTP category 5 cable up to 328ft/100m (4 pairs) <hr/> Auto detect bit rate (10/100/1000), or force to 10Mbit for each port (selectable) <hr/> Automatic crossover detection or force manually for each port (selectable) <hr/> Port speed / activity LED indication (next to Ethernet port)
Fiber Optic	1 x fiber optic input (Range 1270-1610nm, Sensitivity -3dBm to -23dBm) 1 x fiber optic output CWDM (ITU-T G.694.2) 18 selectable wavelengths Duplex (Single model) using LC/PC Connections <hr/> IEEE 802.3z (1000BASE-X Gbit/s Ethernet over Fiber at 1 Gbit/s (125 MB/s)) <hr/> Fiber TX active and RX active LEDs on side of module <hr/> Max. distance approx. 40km (24.8 miles - Singlemodel)
Power	+12VDC @ 1.5W nominal without SFP +12VDC @ 2.3W nominal with SFP (supports 7 - 15VDC input range)
Physical	Size: 120mm x 42mm x 22mm (4.73" x 1.65" x 0.86") including connectors Weight: 125g (4.4oz)
Ambient	5 - 40°C (41 - 104°F) 90% Humidity (non condensing)
Model #	OET 1540 - (EAN# 4250479315426)
Includes	Module, AC power supply, transport case

Fiber Adapter Options

These adapter kits allow the use of ST or SC fiber connections on the module. SMF 0.5m (19.6") tail introduces less than 0.25dB attenuation.



Model# **LC/SC DUP**
LC/PC to SC/PC Adapter



Model# **LC/ST DUP**
LC/PC to ST/PC Adapter

Specifications subject to change