

1

2

3



4

5

6


CONFORM TO RoHS DNSTROCTIONS

铜齿轮	
Module m	0.5
压力角 a	20°
No of teeth	10
齿轮外径 Do	φ5 <sup>-0.015</sup> <sub>-0.03</sub>

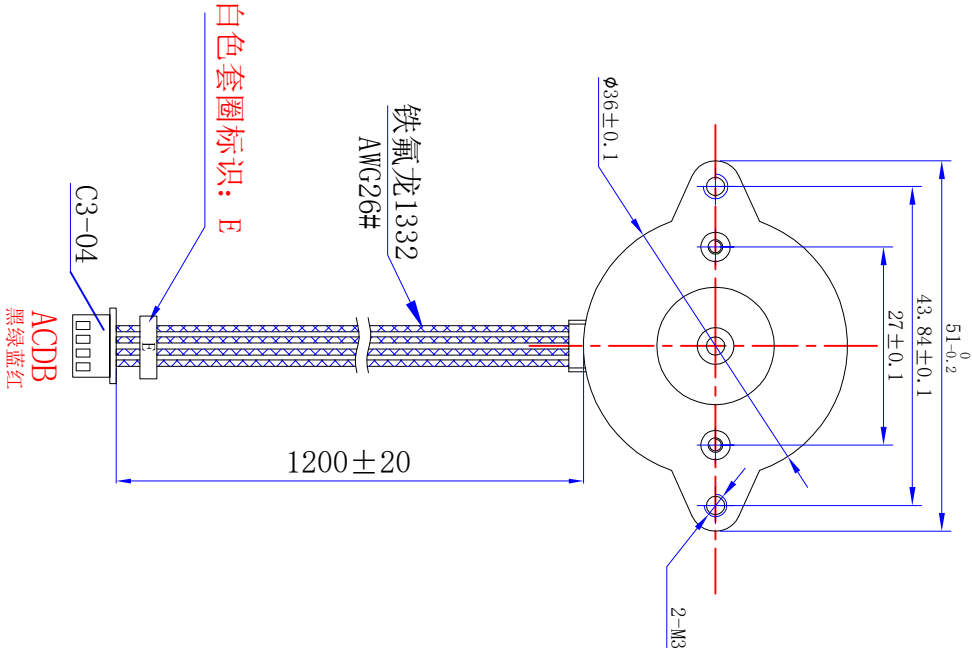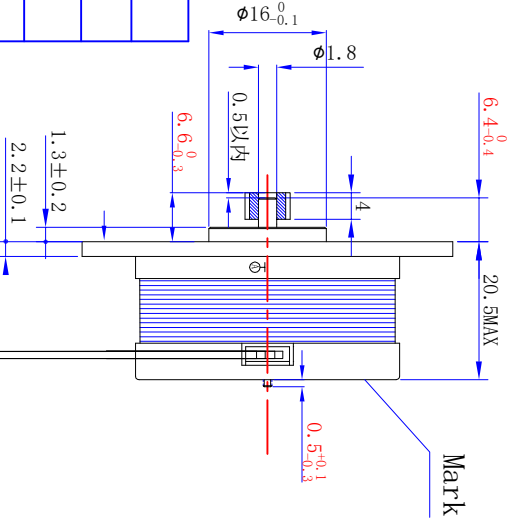

电气原理图

winding drawing



Character	Specifications
Number of phase	2
Step Angle	1.8°
Rated Voltage	DC 2.4V
Rated current	DC 1A
Holding Torque	≥ 110mN.m
Winding resistance	2.4±10% ohm (20℃)
Winding inductaoce	1.7±20% mH (1kHz)
Direction of rotation	A-AB-B-CW
Rotor Inertia	15 g.cm²
Weight	0.1Kg
Insulation class	F Class

D

D

B

B

A

A



View  
Inverse proportion  
1 : 1

Shenzhen Fuyansheng  
Electronic Technology  
Co., Ltd.

Model G36HSY4405-6D-1200

1

2

3

4

5

6