Six-domain benchmark spans intersections, corridors and metropolitan grids

Five urban domains and one synthetic domain retain their original SUMO geometry, demand files and tlLogic programs.

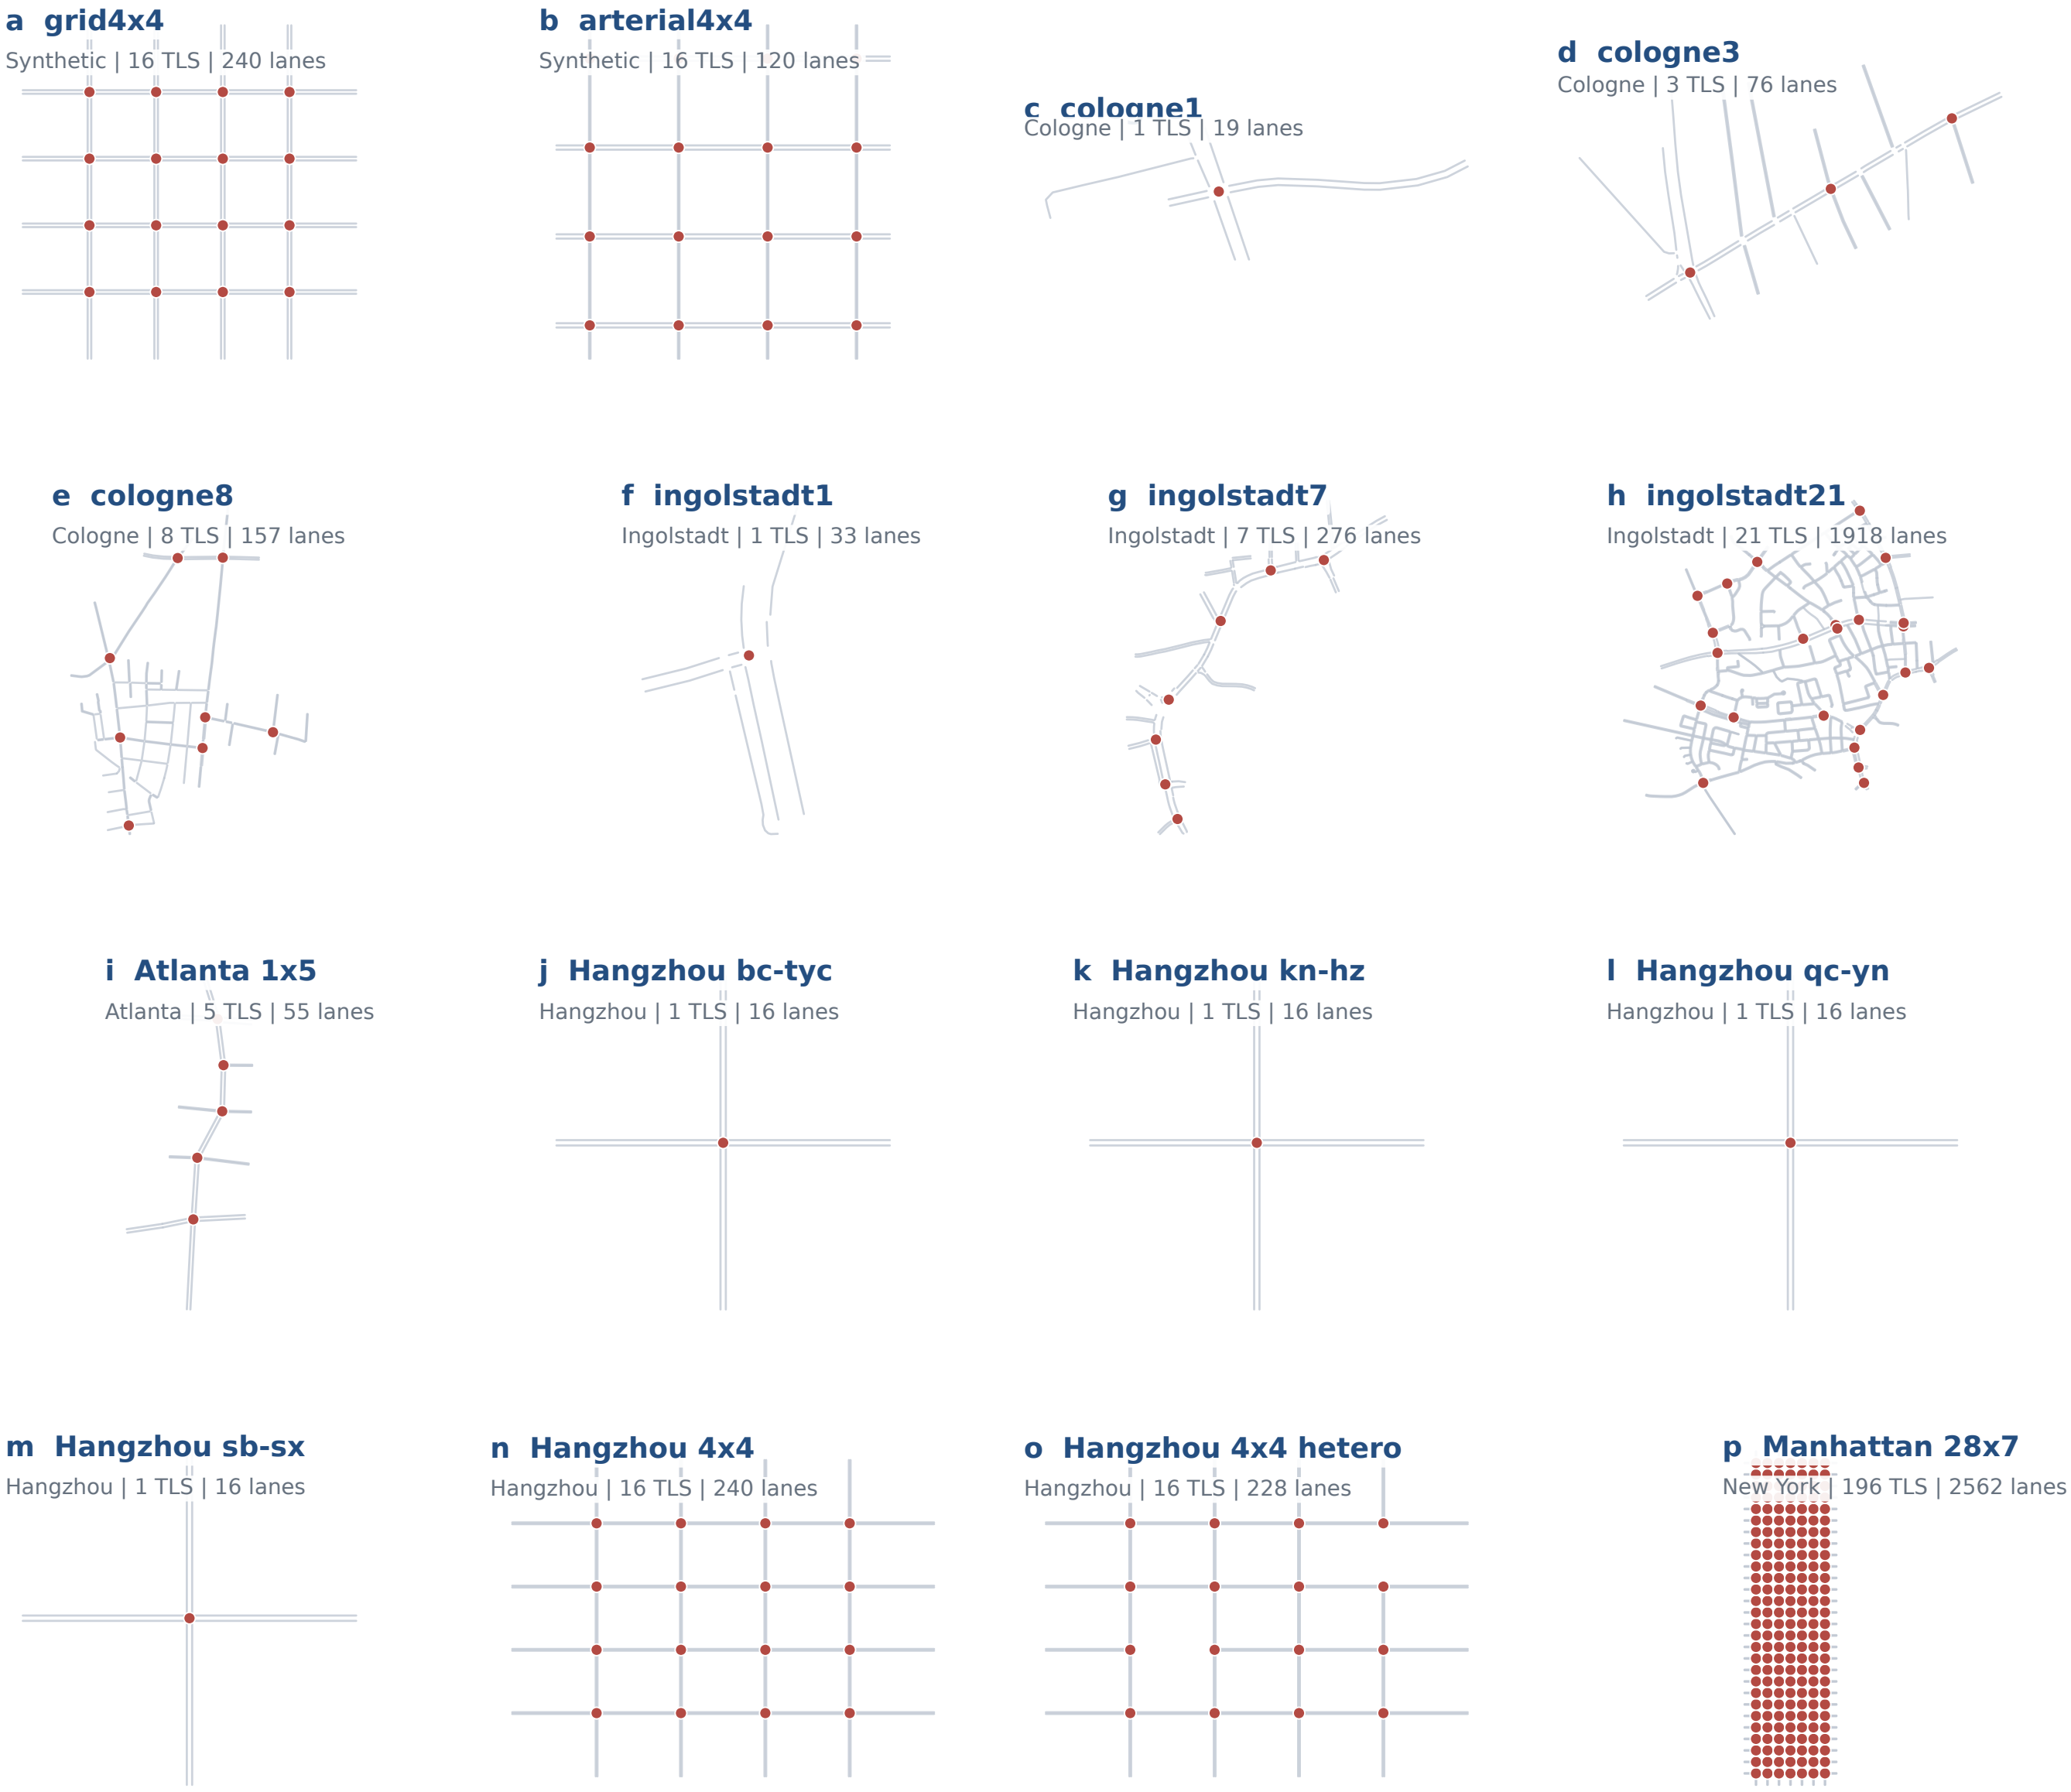

Grey: non-internal lanes. Red: signalized junctions. TLS counts are original tlLogic controllers; geometry is not normalized across domains.