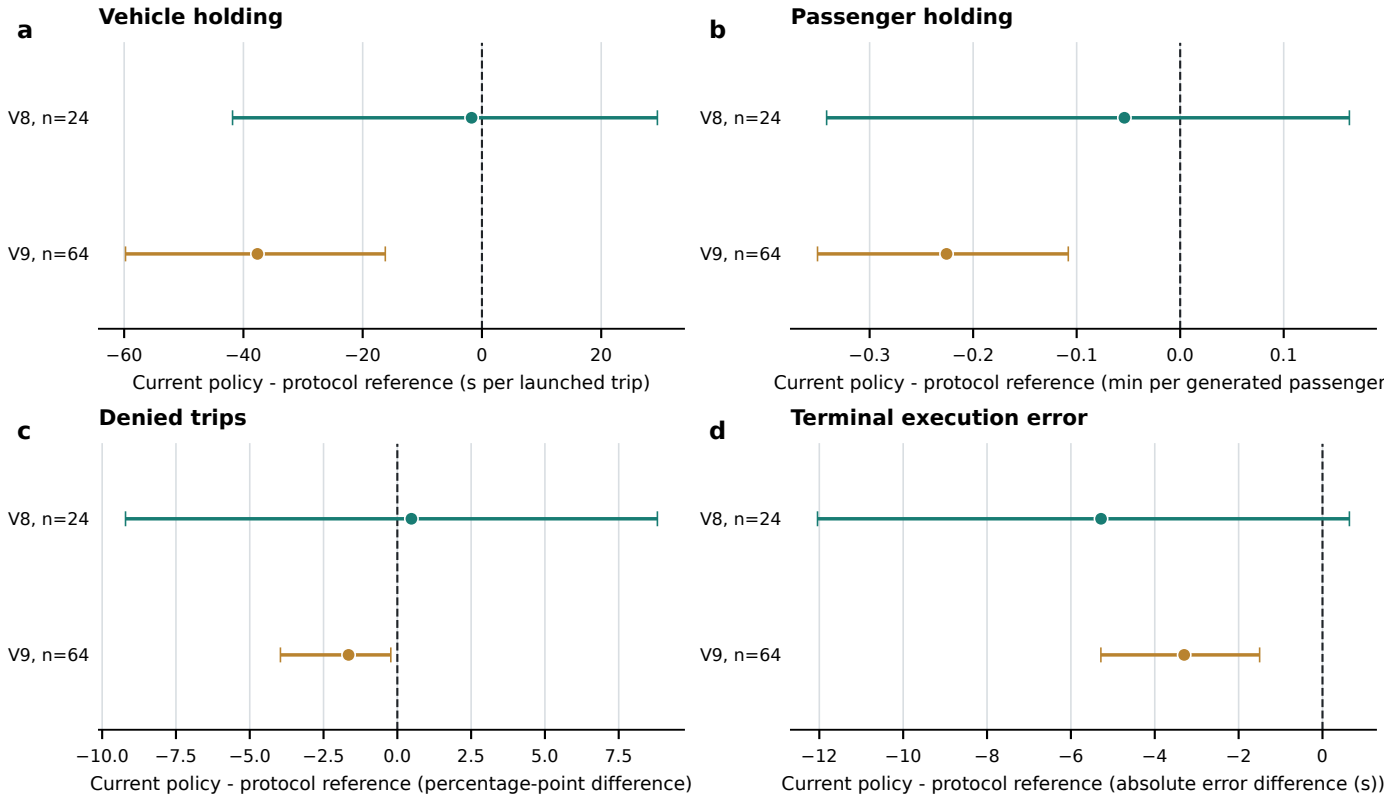
a
Vehicle holding
V8, n=24
V9, n=64
−60
−40
−20
0
20
Current policy - protocol reference (s per launched trip)
b
Passenger holding
V8, n=24
V9, n=64
−0.3
−0.2
−0.1
0.0
0.1
Current policy - protocol reference (min per generated passenger
c
Denied trips
V8, n=24
V9, n=64
−10.0
−7.5
−5.0
−2.5
0.0
2.5
5.0
7.5
Current policy - protocol reference (percentage-point difference)
d
Terminal execution error
V8, n=24
V9, n=64
−12
−10
−8
−6
−4
−2
0
Current policy - protocol reference (absolute error difference (s))