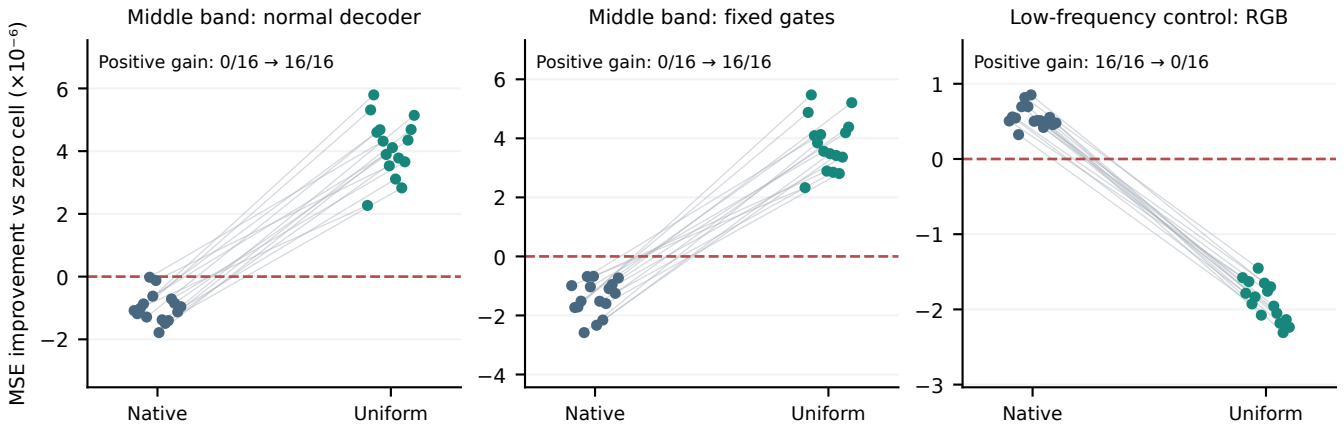
Middle band: normal decoder
Positive gain: 0/16 → 16/16
Middle band: fixed gates
Positive gain: 0/16 → 16/16
Low-frequency control: RGB
Positive gain: 16/16 → 0/16
MSE improvement vs zero cell (×10⁻⁶)
Native
Uniform
Native
Uniform
Native
Uniform