PANTONE REPORT : THE PAGES OF MICHEL DAVID

PAGE 4

BUBBLE-FREE PANTONE MOUNTING AND CARBURETOR-POWERED PANTONE SYSTEM

Page created 05/03/2001

Back to the M.David menu

As recommended by Mr. PANTONE in his patent, his reactor can be fed by a carburetor instead of a bubbler. Obviously to do this, the carburetor must be able to spray the gasoline as finely as possible, it is not used to do the

fuel / gasoline dosage since this is done at the outlet of the reactor, but must be able to spray gasoline with very little air. It is therefore necessary to use a small variable nozzle carburetor. This kind of carburetor exists in the form of the plug carburetor formerly used on small engines.

<u>For those who do not know this type of carburetor.</u>

This type of carburetor is quite interesting and is well suited to our use because it has the advantage of being a kind of variable nozzle carburetor with variable nozzle. Indeed, it is no longer a butterfly which conditions the entry of air, but a bushel. The essential difference is that this bushel is located just above the nozzle and that it carries a conical needle which enters the nozzle. Thus the nozzle increases in section as the bushel rises and lets more and more air pass. Correct spraying of gasoline is obtained in all valve positions. It is therefore quite the type of carburetor that is suitable for our experiments with GEET PANTONE.

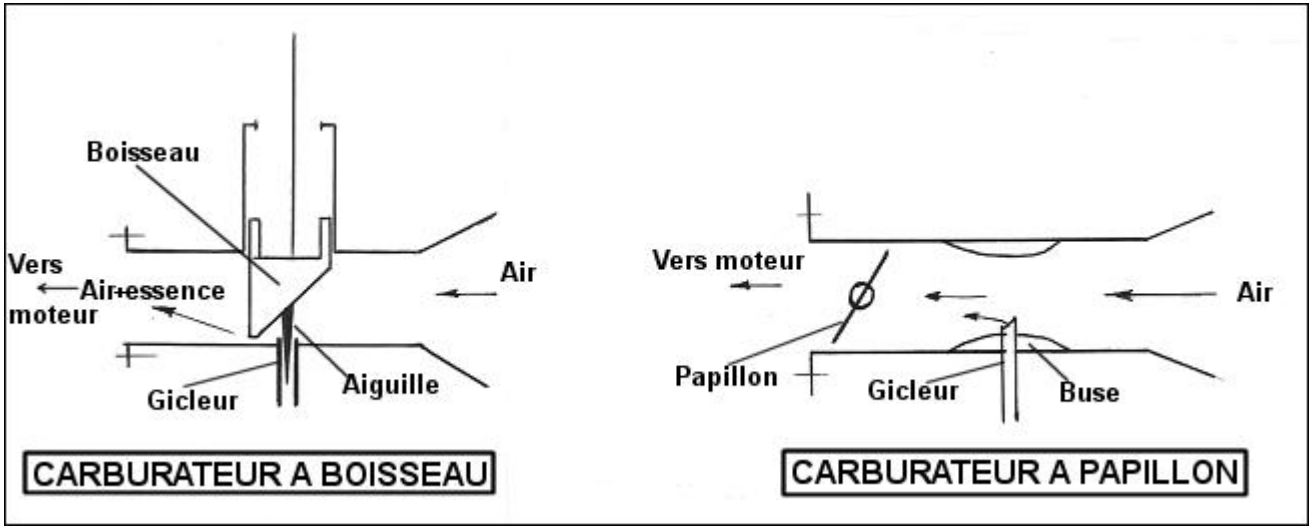

In conventional and widely used carburetors now, the area where the nozzle is located is a constricted part of the body of the carburetor called the nozzle or venturi, it is of a fixed size like the nozzle itself and one manages otherwise to compensate for these. defects in the technology of this type of carburetor.

So all these carburetors with large nozzle diameter are not too suitable to be adapted to small PANTONE reactors that we want to feed without bubbler. It should be kept in mind that the maximum air passage opening of the carburetor used must not exceed the value of the gas passage opening in the reactor, ie 50 to 60 mm2 for the reactors described. It is therefore not possible to find even in plug carburettors such a small air passage section, but for the plug carburetor, this is not a problem because of the particularities stated above: it will suffice to limit the maximum permissible opening by a stop. Either way, after adjustment, your carburetor plug will be immobilized in

the position which will give the best results depending on the engine used.Preferably choose an engine with a fairly large displacement, at least 240 cm3 to have a greater depression in the carburetor at very low speed, you will have, thus easier to put all this to the point. forced to increase the size of the nozzle because it is necessary to spray the gasoline necessary for the engine with very little air.

EXAMPLE OF ASSEMBLY WITH CARBURETOR IN PLACE OF BULLEUR.

In the assembly shown in this drawing, you keep the modified butterfly carburetor as I have already explained, for the mixture of GEET gas and air and for controlling the engine speed. A very small plug carburetor will be installed at the inlet of the reactor in place of the bubbler, it will ensure the atomization of the fuel with the lowest possible quantity of air. After adjusting the valve opening, its setting can remain fixed. To try to cause the atomized gasoline to volatilize a little, it is advantageous to pass what comes out of the carburetor into a heated chamber installed around one end of the reactor, before being sucked into the reactor, (see drawing). It is also interesting to preheat the air which enters the carburetor, by the same means. It is also possible to use,instead of air, a fraction of the exhaust gases, (see drawing).

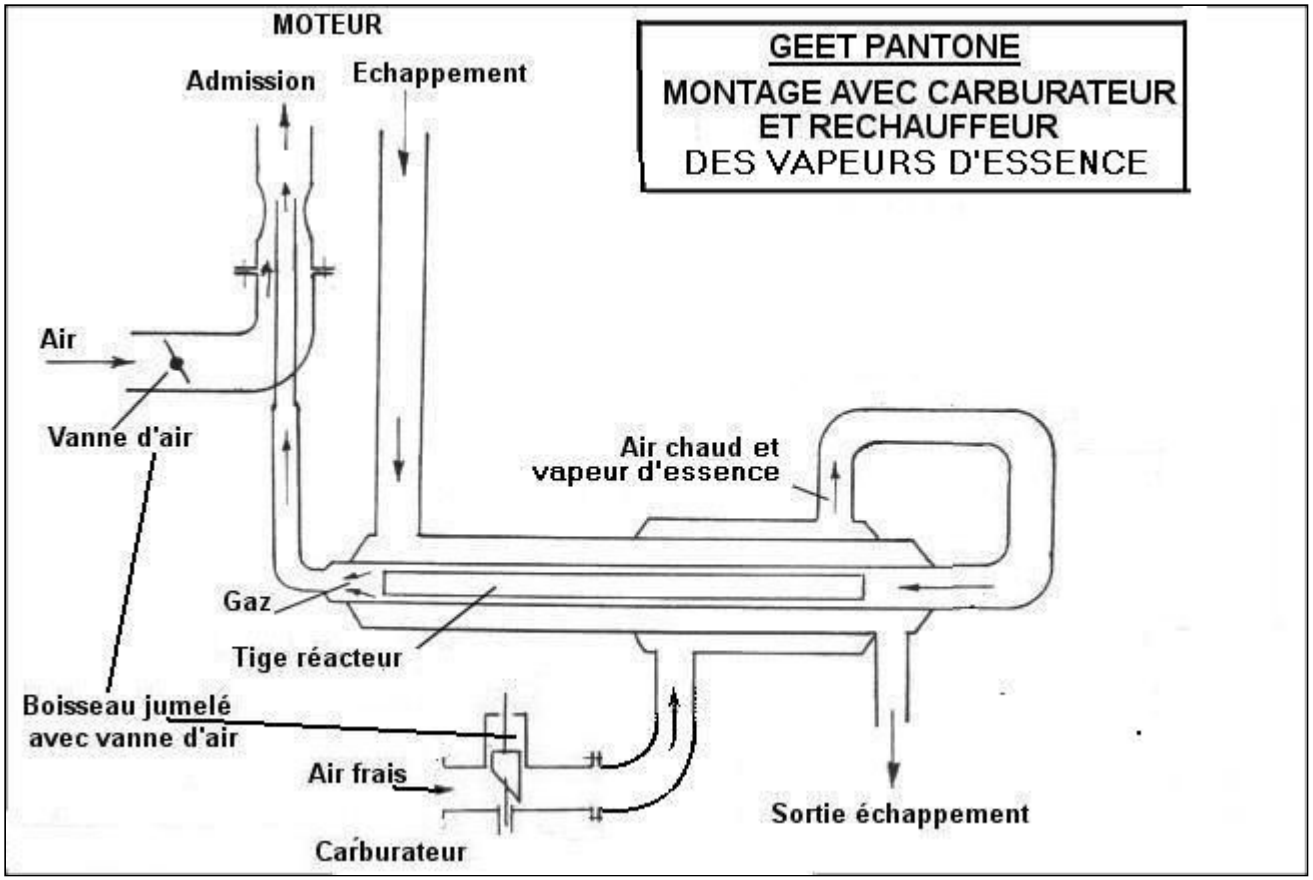
GEET PANTONE
MONTAGE AVEC CARBURATEUR
ET RECHAUFFEUR
DES VAPEURS D'ESSENCE
MOTEUR
Admission
Echappement
Air
Vanne d'air
Air chaud et
vapeur d'essence
Gaz
Tige réacteur
Boisseau jumelé
avec vanne d'air
Air frais
Carburateur
Sortie échappement

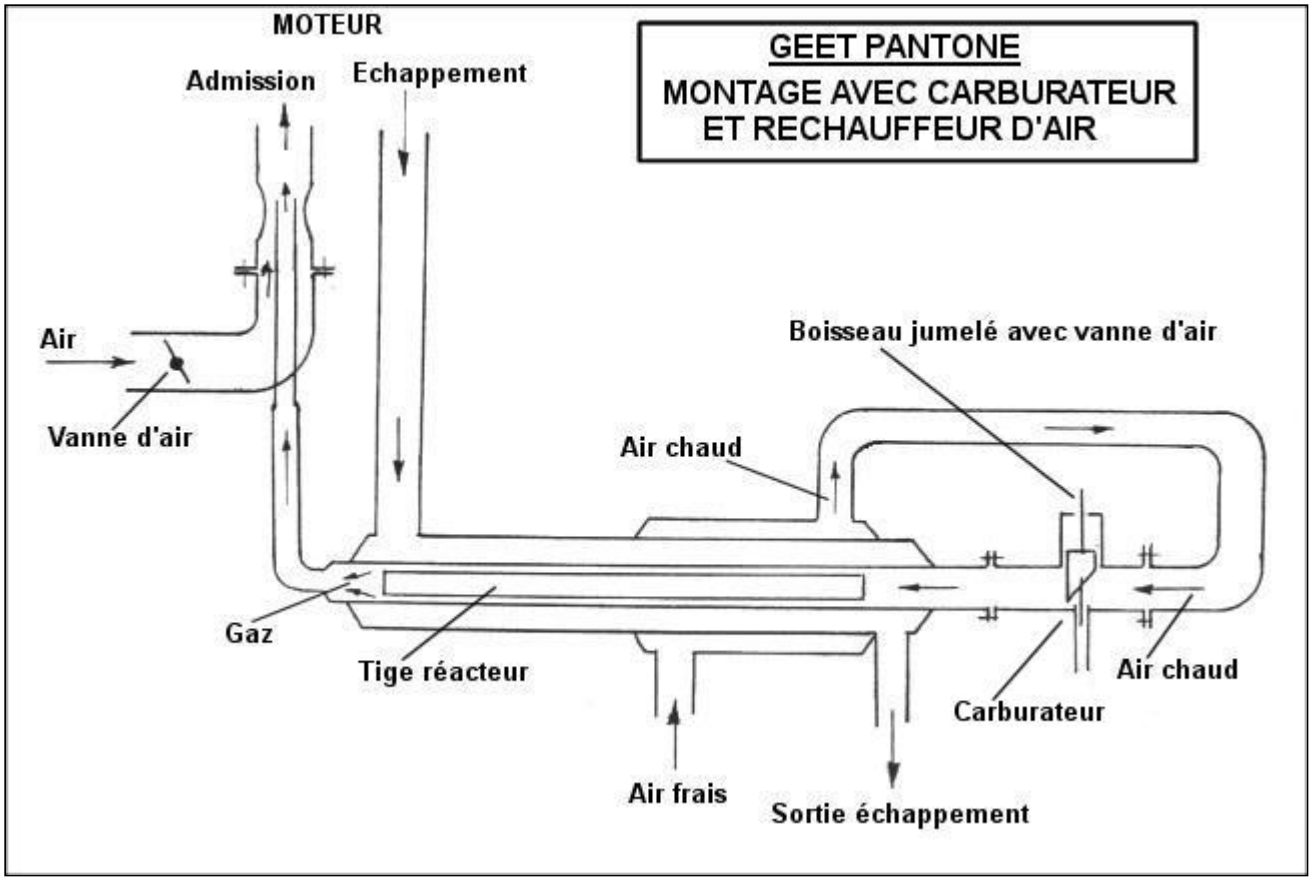
MOTEUR
Admission
Echappement
GEET PANTONE
MONTAGE AVEC CARBURATEUR
ET RECHAUFFEUR D'AIR
Air
Vanne d'air
Boisseau jumelé avec vanne d'air
Air chaud
Gaz
Tige réacteur
Air chaud
Carburateur
Air frais
Sortie échappement

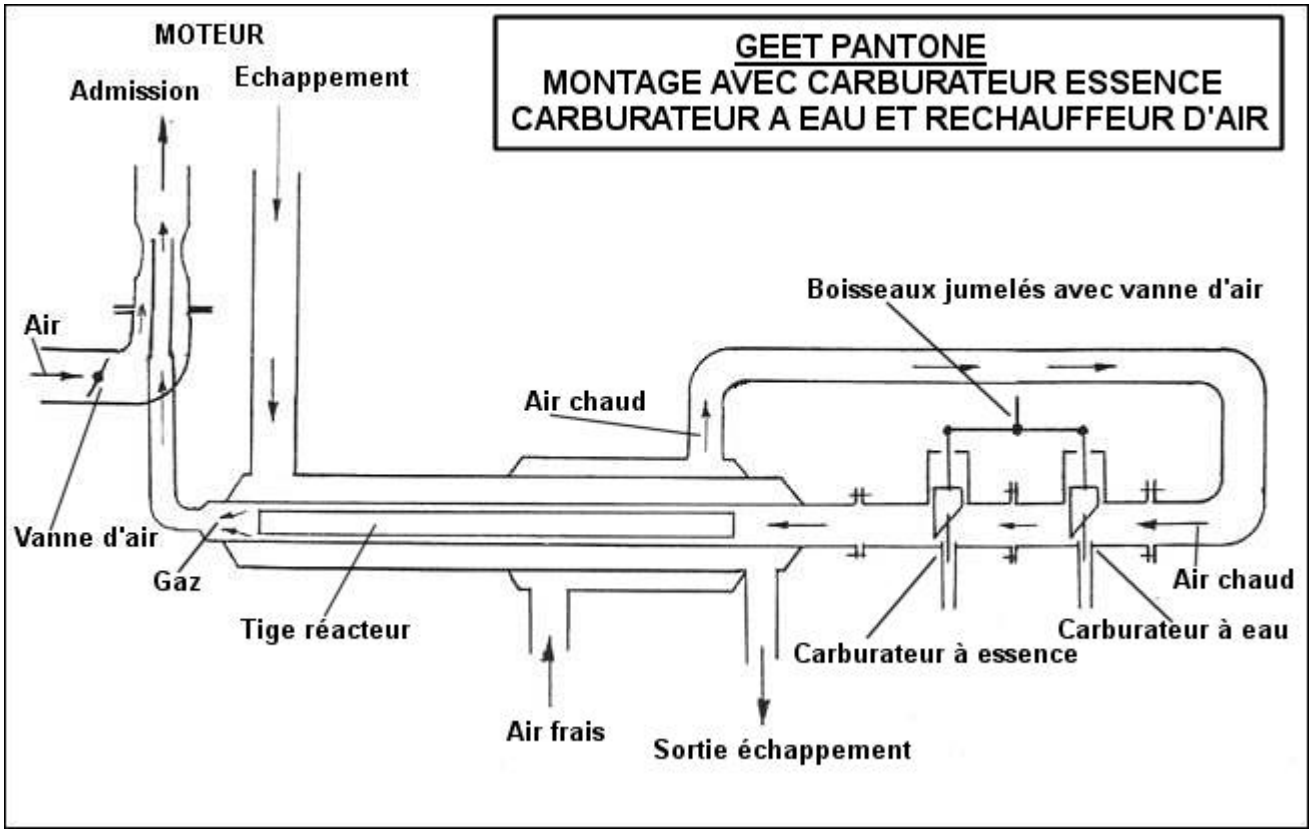
GEET PANTONE
MONTAGE AVEC CARBURATEUR ESSENCE
CARBURATEUR A EAU ET RECHAUFFEUR D'AIR
MOTEUR
Admission
Echappement
Air
Vanne d'air
Gaz
Tige réacteur
Air chaud
Boisseaux jumelés avec vanne d'air
Air chaud
Carburateur à essence
Carburateur à eau
Air frais
Sortie échappement

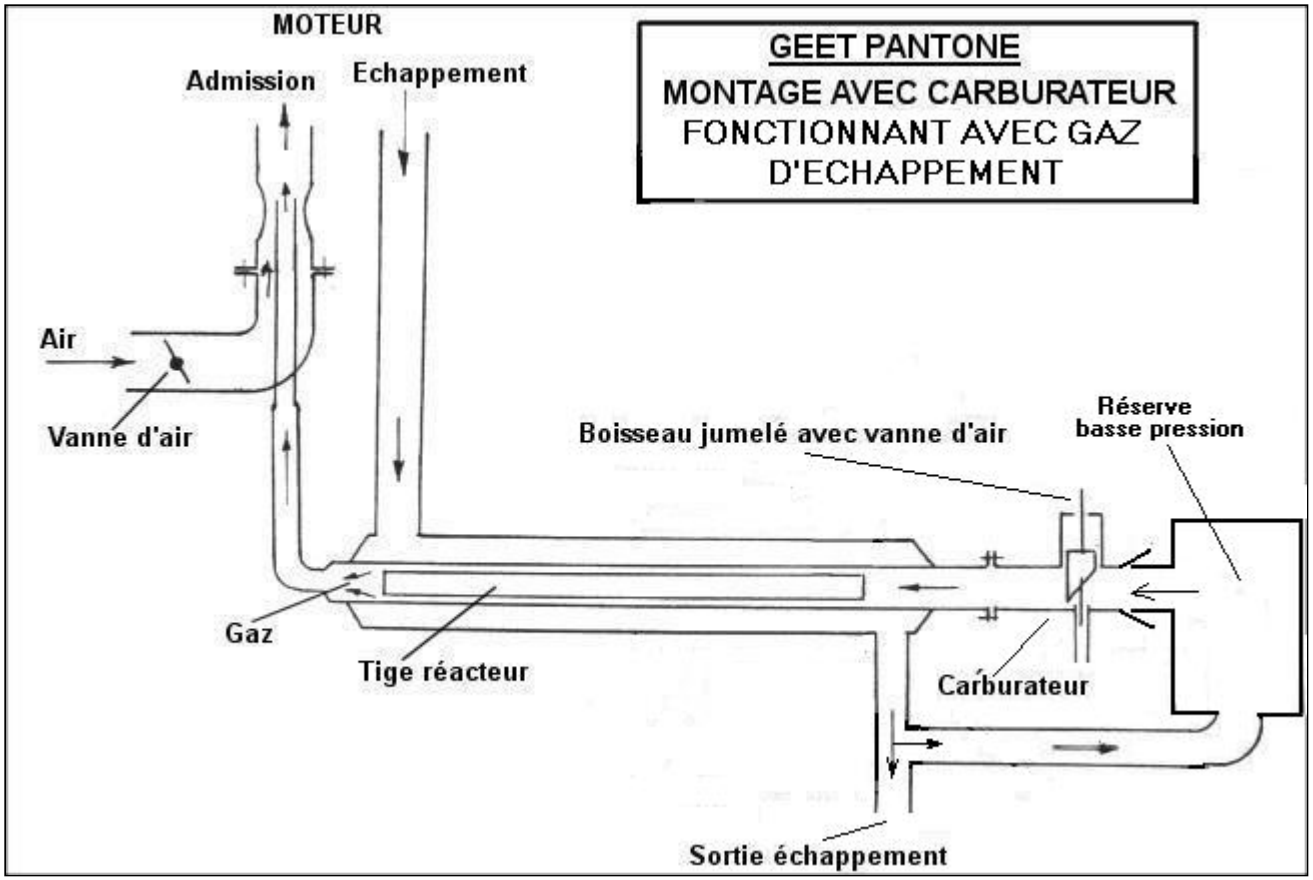

Page 1 Page 2 Page 3 Page 4 Page 5 Page 6 Page 7 Page 8 Page 9 Page 10 Page 11 Page 12 Page 13 Page 14 Page 15 Page 16

Menu Summary Home