


Specification

Display diagonal	10.1 inches
Unit size	166.9 mm × 248.1 mm
Active area	135.4 mm × 216.6 mm
Viewing angle	85 degrees
Display format	24-bit RGB 1200 × 1920 pixels Native portrait
Display type	True multi-touch capacitive touch panel, supporting ten-finger touch In-plane switching thin-film transistor (IPS TFT) liquid-crystal display Normally black Transmissive
Volatile memory	M031TC1AE (includes SRAM)
Non-volatile memory	M031TC1AE (includes flash) IL79600A (includes flash) ATSHA204A (includes an EEPROM array) W25Q40EWUXIET (EEPROM)
Power consumption	5.1 W
TFT supply	3.3 V at 340 mA
LED backlight supply	5 V at 800 mA
Touch response time	Max: 35 ms
Surface treatment	Anti-glare
Colour configuration	RGB-stripe
Backlight brightness	400 cd/m²
Backlight lifetime	20,000 hours
Lumen maintenance	L50
Operating temperature	−20°C to +70°C

Physical specification

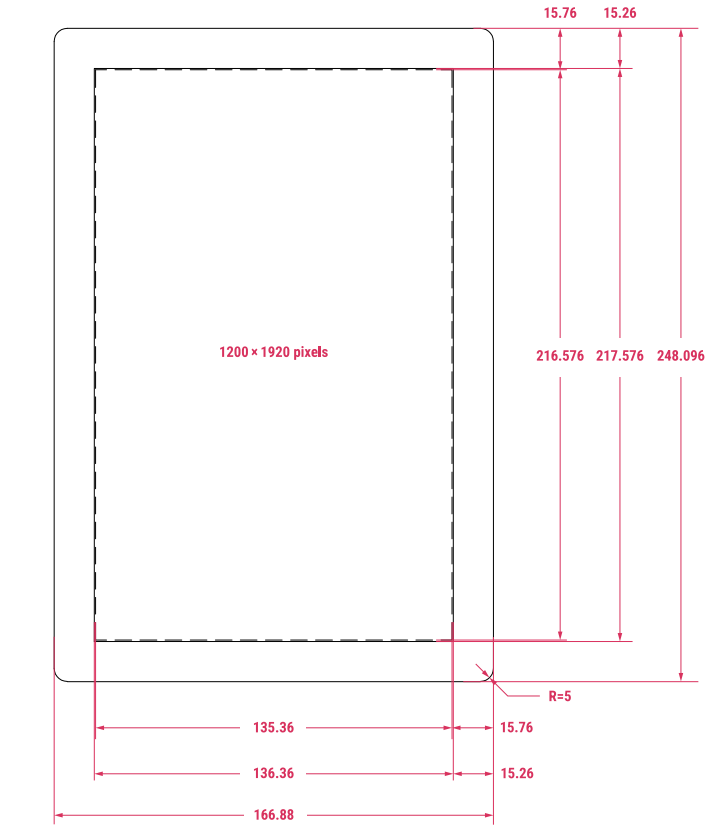



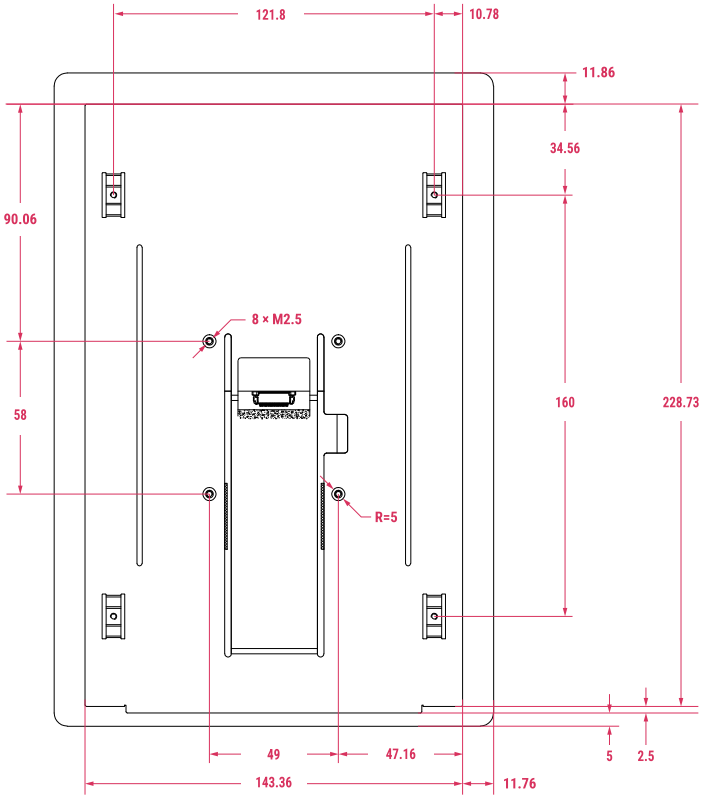

Note:

All dimensions in mm

All dimensions are approximate and for reference purposes only. The dimensions shown should not be used for producing production data

The dimensions are subject to part and manufacturing tolerances

Dimensions may be subject to change