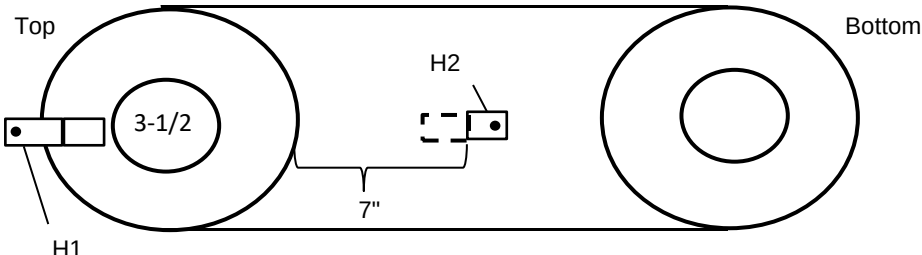
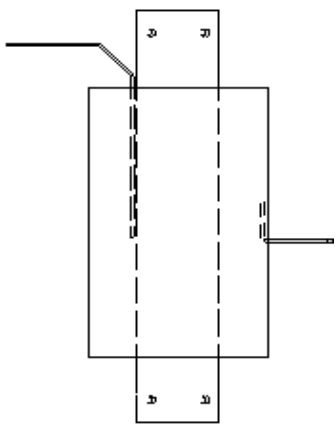


			FREQUENCY 60		PHASE 1		TYPE COIL & AIR CORE	
VOLTAGE			13800V L-L (95kV BIL)					
CENTER LEG		N/A	TUBE 3-1/2" OD Circular Tube*				COIL LENGTH 12 3/8	
		Wind 1 Coil						
WINDING		Single Winding						
WIRE SIZE		(2 wide) 7 Sq Heavy Cu Wire (340515: 7 SQ, 200C, Polyamide Imide, Non-Solderable, Copper Wire)						
TURNS		30 1/2						
LEADS		H1		H2				
		0		30 1/2				
KEEPBACK		5 3/16						
WDG LENGTH		2						
TURNS/LAYER		5 1/2						
LAYERS		6						
LAYER INSULATION		(4) 0.015 TV + 1/4 Stick AR after layer 3						
WRAPPER		(2) 0.010 TV						
MLT		16.1						
WIRE WEIGHT		6.5						
LEADS:				NOTES:				
H1 Braze to TC-800814 Item 1, out 1/2" to first bend. LV sleeve 2-1/2" past 2nd bend				*See Winding Tube Sheet for mold and tube details				
H2 Braze to TC-800814 Item 2, out face of coil. See location below				**Place sticks 2.5" or less apart to ensure at least 3/16 gap between layers.				
PADS: (4) 0.015 TV, flush, 4-1/2" Wide								
								
Coil Diagram				Finished Coil				
Calculated Coil Size:				6 3/4	x	7 1/8	Either dimension 1/4" less check winding and alert engineering	
Maximum Coil Size:				7 1/4	x	7 5/8		
Measured Coil Size:					x			
Revision Notes R0 9/22/23 R1 12/7/23 Redsn for 2 pulls				ENGINEERED BY		NF	WINDING SHEET	
				REVIEWED BY				
				REVISION DATE		12/7/23		
				REVISION NUMBER		1		
				WS -800814				