



95A Cont, 240A @ 5 sec, 43.3 mH		FREQUENCY 60		PHASE 1	TYPE	COIL & AIR CORE	
VOLTAGE		13200V L-L					
CENTER LEG		N/A	TUBE			9-1/4 OD Circular Tube*	
					COIL LENGTH		17 7/16
		Wind 1 Coil					
WINDING	Single Winding						
WIRE SIZE	.128 x .365 Heavy CU Wire (340160: .128 x .365, 200C, Polyamide Imide, Non-Solderable, Copper Wire)						
TURN S	377 1/2						
LEADS	H1		H2				
	0		377 1/2				
KEEPBACK	5-1/4 PO						
WDG LENGTH	6 15/16						
TURN S/LAYER	18						
LAYERS	21						
LAYER INSULATION	0.015 TV + 3/4 Stick AR after layers 4, 8, 12, 16						
	0.015 TV all other layers						
WRAPPER	(2) 0.010 TV + Glass Tape						
MLT	50.5						
WIRE WEIGHT	282.8						

LEADS:		NOTES:
H1	Self out 28" with DOUBLE HV SLEEVE in margin out 18"	*See Winding Tube Sheet for mold and tube details
H2	Braze to TC-800815 Item 1 out face of coil at position shown	**Place sticks 2.5" or less apart to ensure gap between layers.
PADS:	(4) 0.015 TV, flush, 5" Wide	

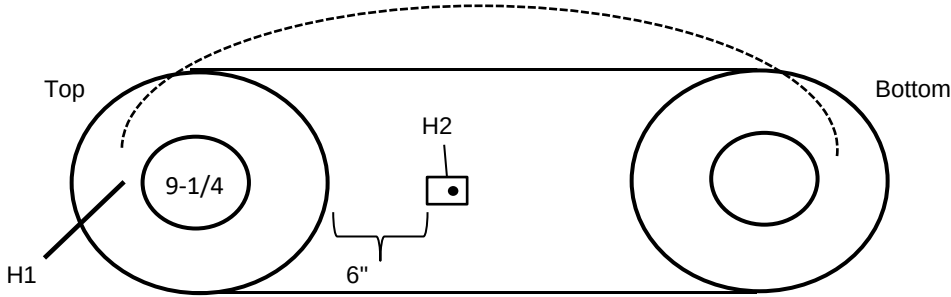

Coil Diagram

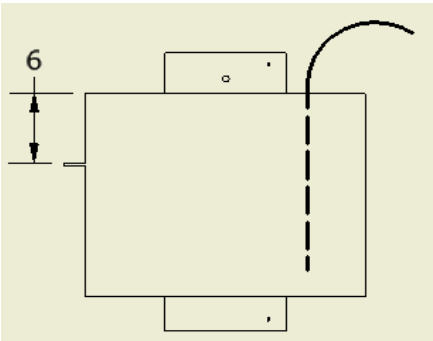

Finished Coil

Calculated Coil Size:	22 3/8	x	23	Either dimension 1/2" less check winding and alert engineering
Maximum Coil Size:	23 3/8	x	24	
Measured Coil Size:		x		

Revision Notes		ENGINEERED BY	RM	WINDING SHEET
		REVIEWED BY		
		REVISION DATE	1/24/24	
		REVISION NUMBER	0	WS -800815