



100A Cont, 200A @ 2 sec, 106 mH		FREQUENCY 60		PHASE 1	TYPE	COIL & AIR CORE			
VOLTAGE		13200V L-L							
CENTER LEG		N/A	TUBE			9-1/4 OD Circular Tube*		COIL LENGTH	24 1/16
		Wind 1 Coil							
WINDING	Single Winding								
WIRE SIZE	.128 x .365 Heavy CU Wire (340160: .128 x .365, 200C, Polyamide Imide, Non-Solderable, Copper Wire)								
TURNS	720								
LEADS	H1			H2					
	0			720					
KEEPBACK	5-1/4 PO								
WDG LENGTH	13 9/16								
TURNS/LAYER	36								
LAYERS	20								
LAYER INSULATION	0.015 TV + 1/2 Stick AR after layers 4, 8, 12, 16								
	0.015 TV all other layers								
WRAPPER	(2) 0.010 TV + Glass Tape								
MLT	46.8								
WIRE WEIGHT	500.0								

LEADS:	NOTES:
H1 Self out 32" with DOUBLE HV SLEEVE in margin out 19"	*See Winding Tube Sheet for mold and tube details
H2 Braze to TC-800817 Item 1 out face of coil at position shown	**Place sticks 2.5" or less apart
PADS: (4) 0.015 TV, flush, 5" Wide	

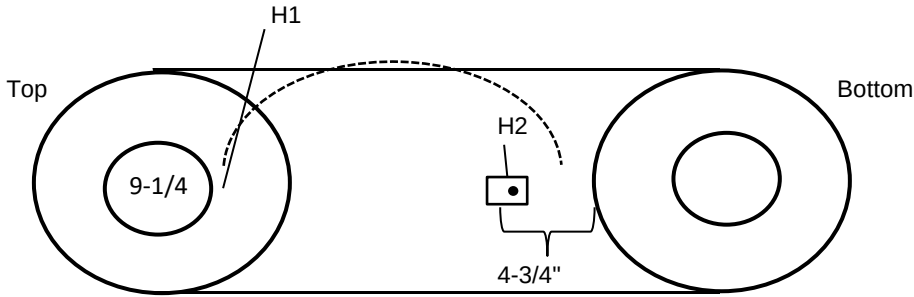

Coil Diagram

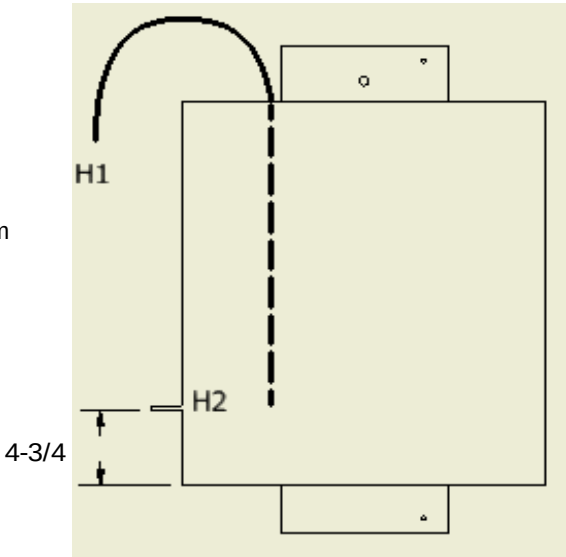

Calculated Coil Size:
20 1/16
x
20 11/16
Maximum Coil Size:
20 1/2
x
21 1/8

Either dimension 1/2" less check winding and alert engineering

Measured Coil Size:

x

Revision Notes		ENGINEERED BY	RM	WINDING SHEET
		REVIEWED BY		
		REVISION DATE	12/5/23	
		REVISION NUMBER	0	WS -800817