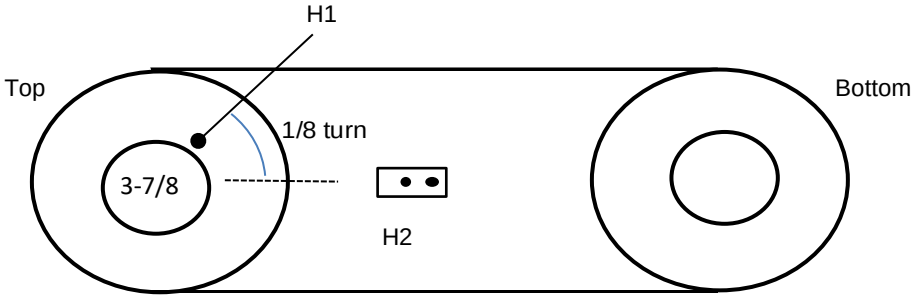
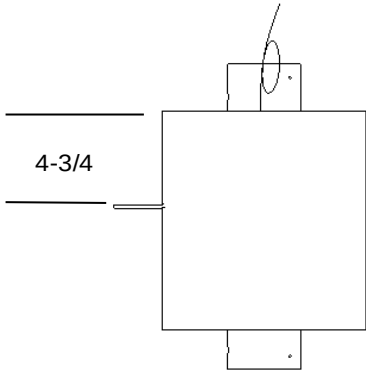


81A Cont, 1337A @ 10 sec, 2.81 mH		FREQUENCY 60		PHASE 1		TYPE COIL & AIR CORE	
VOLTAGE 13800V L-L (95kV BIL)							
CENTER LEG N/A		TUBE 3-7/8 OD Circular Tube*				COIL LENGTH 16 3/16	
		Wind 1 Coil					
WINDING		Single Winding					
WIRE SIZE		(1 high x 2 wide) .114 x .258 Heavy Cu Wire (340122: .114 x .258, 200C, Polyamide Imide, Non-Solderable, Copper Wire)					
TURNS		160-1/8					
LEADS		H1		H2			
		0		160-1/8			
KEEPBACK		5-3/16 PO					
WDG LENGTH		5 3/4					
TURNS/LAYER		10					
LAYERS		16					
LAYER INSULATION		0.015 TV + 1/2 Stick AR after layers 4, 8, 12 0.015 TV all other layers					
WRAPPER		(2) 0.010 TV					
MLT		24.3					
WIRE WEIGHT		72.0					
LEADS:				NOTES:			
H1 Self out 24", double HV sleeve into margin, 20" out				*See Winding Tube Sheet for mold and tube details			
H2 Braze to TC-800821 out face of coil, 1/8 of a turn (45 degrees) past H1. See diagram				**Place sticks 2.5" or less apart to ensure at least 3/16 gap between layers.			
PADS: (4) 0.015 TV, flush, 4-1/2" Wide							
							
Coil Diagram				Finished Coil			
Calculated Coil Size: 11 5/8 x 12 1/4							
Max coil size: 12 5/8 x 13							
Measured Coil Size:							
Revision Notes				ENGINEERED BY		RM	
				REVIEWED BY			
				REVISION DATE		3/8/24	
				REVISION NUMBER		0	
				WINDING SHEET			
				WS -800821			