

KVA	60	FREQUENCY	60	PHASE	3	TYPE	Air Core Reactor		
PRIMARY									
CENTER LEG		TUBE			8" Diameter - 4 layers 1/32 Red board			COIL LENGTH	44-1/2
CORE DEPTH		WIND			3 COILS				
WIRE SIZE		2 high x 3 wide - .204 x .408 Nomex Cu Wire (340845:.204 x .408, 220C, Nomex Wrapped Copper Wire)							
WINDING		Section 3			Section 4				
TURNS		8							
LEADS		S3			S4				
		0			0				
KEEPBACK		1-1/2 PO (start)			N/A				
WDG LENGTH		11 3/8			11 3/8				
TURNS/LAYER		8			8				
LAYERS		1			same layer as F3				
LAYER INSULATION		N/A			N/A				
WRAPPER		N/A			N/A				
MLT									
WIRE WEIGHT									
LEADS:				NOTES:					
S3: Braze to TC-800826 Item 102, 1/4" to bend				1) Section 4 starts where section 3 finishes with a gap between finish and start. The sections do not connect.					
F3: Braze to TC-800826 Item 104									
S4:									
F4:									
PADS:									
S3: (2) 0.010 Nomex, 3" wide, flush out									
S3 S2 F1 S1 min. 2" gap centered F9 S9 F5 S6 F7 S8 F3 S4 F4 S5 F6 S7 F8 F2 Calculated Coil Size: 12 3/8 x 17 1/8 + LEADS Maximum Coil Size: 12 3/8 x Measured Coil Size: x									

KVA	60	FREQUENCY	60	PHASE	3	TYPE	Air Core Reactor
PRIMARY							
CENTER LEG		TUBE8" Diameter - 4 layers 1/32 Red board				COIL LENGTH44-1/2	
CORE DEPTH		WIND 3 COILS					
WIRE SIZE	2 high x 3 wide - .204 x .408 Nomex Cu Wire (340845:.204 x .408, 220C, Nomex Wrapped Copper Wire)						
WINDING	Section 5			Section 6		Section 7	
TURN S	8			1		2	
LEADS	S5	F5	S6	F6	S7	F7	
	0	1	0	2	0	4	
KEEPBACK	N/A			N/A		N/A	
WDG LENGTH	10 7/8			3 7/8		6 3/8	
TURN/LAYER	1			2		4	
LAYERS	same layer as F4			same layer as F5		same layer as F6	
LAYER INSULATION	N/A			N/A		N/A	
WRAPPER	N/A			N/A		N/A	
MLT							
WIRE WEIGHT							


LEADS:

F3: Braze to TC-800826 Item 104

PADS:

NOTES:

- 1) Section 5 starts where section 4 finishes with a gap between finish and start. The sections do not connect.
- 2) Section 6 starts where section 5 finishes with a gap between finish and start. The sections do not connect.
- 3) Section 7 starts where section 6 finishes with a gap between finish and start. The sections do not connect.

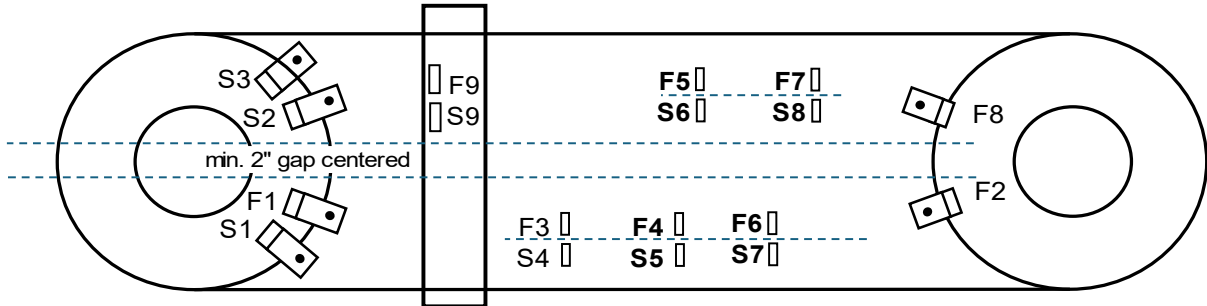

Calculated Coil Size:

12 3/8

x

17 1/8

+ LEADS

Maximum Coil Size:

12 3/8

x

Measured Coil Size:

x

Revision Notes	ENGINEERED BY		RM	WINDING SHEET sheet 3 of 4
	REVIEWED BY			
	REVISION DATE		11/3/25	
	REVISION NUMBER		0	WS - 800826

KVA	60	FREQUENCY	60	PHASE	3	TYPE	Air Core Reactor					
PRIMARY												
CENTER LEG		TUBE			8" Diameter - 4 layers 1/32 Red board		COIL LENGTH	44-1/2				
CORE DEPTH		WIND 3 COILS										
WIRE SIZE		2 high x 3 wide - .204 x .408 Nomex Cu Wire (340845:.204 x .408, 220C, Nomex Wrapped Copper Wire)										
WINDING		Section 8		Section 9								
TURNS		1		1								
LEADS		S8		S9					F8		F9	
		0		0					8		1	
KEEPBACK		2 PO (finish)		2 PO (both sides)								
WDG LENGTH		11 3/8		2 5/8								
TURNS/LAYER		8		1								
LAYERS		same layer as F7		1								
LAYER INSULATION		N/A		N/A								
WRAPPER		(3) 0.015 Nomex 4" wide centered over section 3 to wind section 9		Glass Tape All Around								
MLT												
WIRE WEIGHT												
LEADS:				NOTES:								
S8: Braze to TC-800826 Item 104				1) Section 8 starts where section 7 finishes with a gap between finish and start. The sections do not connect.								
F8: Braze to TC-800826 Item 103, 1/4" to bend												
S9: Braze to TC-800826 Item 105				2) Section 9 is overtop the coil mid way between the coil top and terminals S4, F3								
F9: Braze to TC-800826 Item 105												
PADS:												
F8: (2) 0.010 Nomex, 3" wide, flush out												
S3 S2 F1 S1 min. 2" gap centered F9 S9 F5 S6 F7 S8 F3 S4 F4 S5 F6 S7 F8 F2												
Calculated Coil Size: 12 3/8 x 17 1/8 + LEADS												
Maximum Coil Size: 12 3/8 x												
Measured Coil Size: x												
Revision Notes				ENGINEERED BY		RM		WINDING SHEET sheet 4 of 4				
				REVIEWED BY								
				REVISION DATE		11/3/25						
				REVISION NUMBER		0						
WS - 800826												