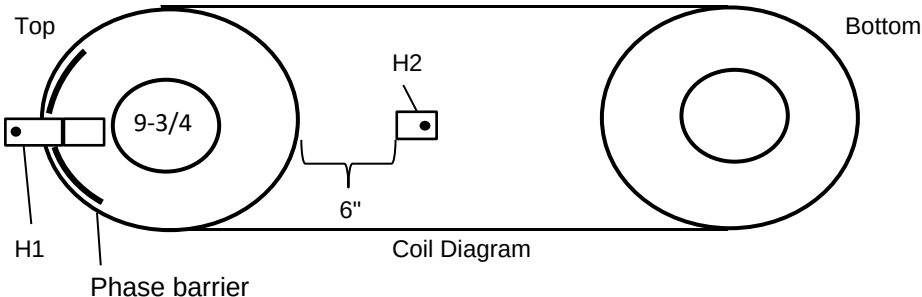
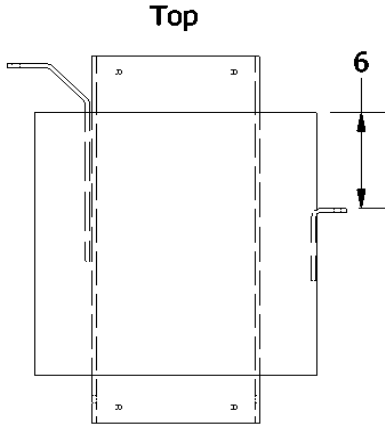


456A @ 10 sec, 8.5 Ohm		FREQUENCY 60		PHASE 1		TYPE COIL & AIR CORE			
VOLTAGE 15kV Class (95kV BIL)									
CENTER LEG N/A		TUBE 9-3/4" OD Circular Tube*				COIL LENGTH 16 3/8			
		Wind 1 Coil							
WINDING		Single Winding							
WIRE SIZE		0.114 x 0.258 Heavy Cu Wire (340122: .114 x .258, 200C, Polyamide Imide, Non-Solderable, Copper Wire)							
TURNS		286-1/2							
LEADS		H1		H2					
		0		286-1/2					
KEEPBACK		5 1/4 PO Every Third Layer							
WDG LENGTH		5 7/8							
TURNS/LAYER		21 Except last layer							
LAYERS		14							
LAYER INSULATION		(2) 0.010 TV + 1/4 Stick AR after layers 5, 10 (2) 0.010 TV all other layers							
WRAPPER		Phase barrier: (2) 1/16 Red Board cut 16 3/8 tall x 10 wide at the location shown Plus final wrap of (2) 0.010 TV all around							
MLT		38.9							
WIRE WEIGHT		103.1							
LEADS:				NOTES:					
H1 Braze to TC-800827 Item 101, out 1/2" to first bend. LV sleeve 1" past 2nd bend				*See Winding Tube Sheet for mold and tube details					
H2 Braze to TC-800827 Item 102, out face of coil. See location below				**Place sticks 2.5" or less apart to ensure at least 3/16 gap between layers.					
PADS: S: (4) 0.015 TV, out to 2nd bend, 4-1/2" Wide Tape and fold to match bend									
F: (4) 0.015 TV, flush, 4-1/2" Wide									
Top  Bottom Coil Diagram				Top  Finished Coil					
Size over Layer 7: 12 3/8 x 12 11/16									
Calculated Coil Size: 15 1/4 x 15 7/8				→ Either dimension 3/4" less check winding and alert engineering					
Maximum Coil Size: 15 3/4 x 16 3/8									
Measured Coil Size:									
Revision Notes				ENGINEERED BY		NF		WINDING SHEET	
				REVIEWED BY					
				REVISION DATE		2/19/25			
				REVISION NUMBER		0			
						WS -800827			