
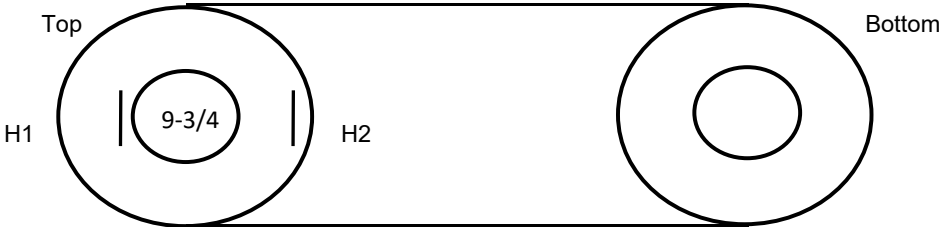
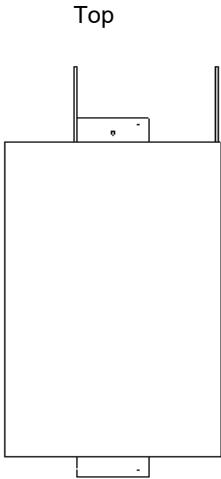


1250A Cont, 30000A @ 3 sec, 0.40 mH				FREQUENCY 60		PHASE 1		TYPE COIL & AIR CORE	
VOLTAGE 34.5kV (150kV BIL)									
CENTER LEG N/A		TUBE 9-3/4 OD Circular Tube*				COIL LENGTH 46			
		Wind 1 Coil							
WINDING		Single Winding							
WIRE SIZE		(3) 0.035 x 27.0 Aluminum Foil (140268: .035 x 27" Aluminum Foil)							
									
TURNS		47 1/2							
LEADS		H1		H2					
		0		47 1/2					
KEEPBACK		9-1/2 PO Every 5th Layer with 1/16 FHT, Bottom only							
WDG LENGTH		27							
TURNS/LAYER		1							
LAYERS		47 1/2							
LAYER INSULATION		0.015 TV + 1/2 Stick AR after layers 8, 16, 24, 32, 40** 0.015 TV all other layers							
WRAPPER		(2) 0.010 TV + Glass Tape							
MLT		58.5							
WIRE WEIGHT		778.0							
LEADS: H1, H2: Item 101 out 11"				NOTES: *See Winding Tube Sheet for mold and tube details **Place sticks 2.5" or less apart to ensure gap between layers.					
PADS: (4) 0.015 TV, 3" Out, 2" Each Side of Bar									
									
Coil Diagram				Finished Coil					
Coil Size After 20 Turns: 17 x 17 1/2				Either dimension 1/2" less check winding and alert engineering					
Calculated Coil Size: 27 1/2 x 28 1/2									
Maximum Coil Size: 28 1/2 x									
Measured Coil Size:						x			
Revision Notes R0 7/8/25 R1 11/21/25 FHT packout				ENGINEERED BY		NF		WINDING SHEET	
				REVIEWED BY					
				REVISION DATE		11/21/25			
				REVISION NUMBER		1			
								WS-800829	