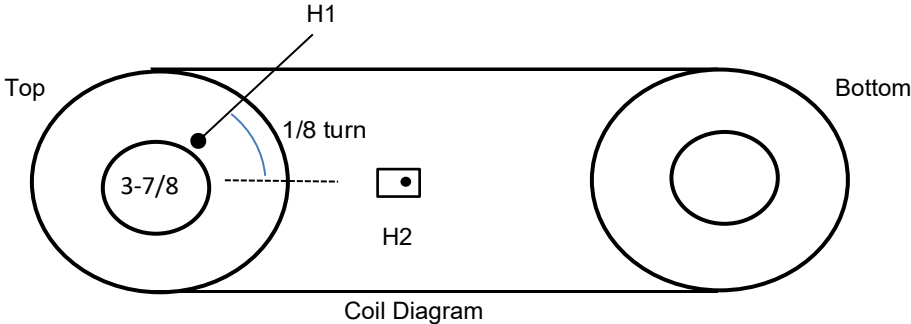
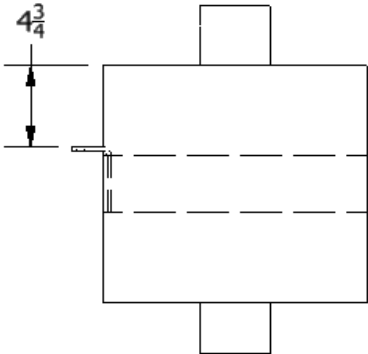


90A Cont, 978A @ 10 sec, 3.5 mH		FREQUENCY 60		PHASE 1		TYPE COIL & AIR CORE			
VOLTAGE 15kV Class (95kV BIL)									
CENTER LEG N/A		TUBE 3-7/8 OD Circular Tube*				COIL LENGTH 13 7/8			
		Wind 1 Coil							
WINDING		Single Winding							
WIRE SIZE		(1) .144 x .365 Nomex Cu Wire (340825: .144 x .365 220C, Nomex, Non-Solderable, Copper Wire)							
TURNS		151-1/8							
LEADS		H1		H2					
		0		151-1/8					
KEEPBACK		5-1/4 PO							
WDG LENGTH		3 3/8							
TURNS/LAYER		8							
LAYERS		19							
LAYER INSULATION		0.015 TV + 3/8 Stick AR after layers 4, 8, 12, 16 0.015 TV all other layers							
WRAPPER		(2) 0.010 TV							
MLT		27.7							
WIRE WEIGHT		70.0							
LEADS:				NOTES:					
H1 Self out 24", double HV sleeve into margin, 20" out				*See Winding Tube Sheet for mold and tube details					
H2 Braze to TC-800831 out face of coil, 1/8 of a turn (45 degrees) past H1. See diagram				**Place sticks 2.5" or less apart to ensure at least 3/16 gap between layers.					
PADS: (4) 0.015 TV, flush, 4-1/2" Wide									
									
Calc Size over Layer 10: 9 x 9 5/16									
Calculated Coil Size: 13 7/8 x 14 1/2									
Max coil size: 14 3/8 x 15									
Measured Coil Size:									
Revision Notes				ENGINEERED BY		NF		WINDING SHEET	
				REVIEWED BY					
				REVISION DATE		7/15/25			
				REVISION NUMBER		0			
						WS -800831			