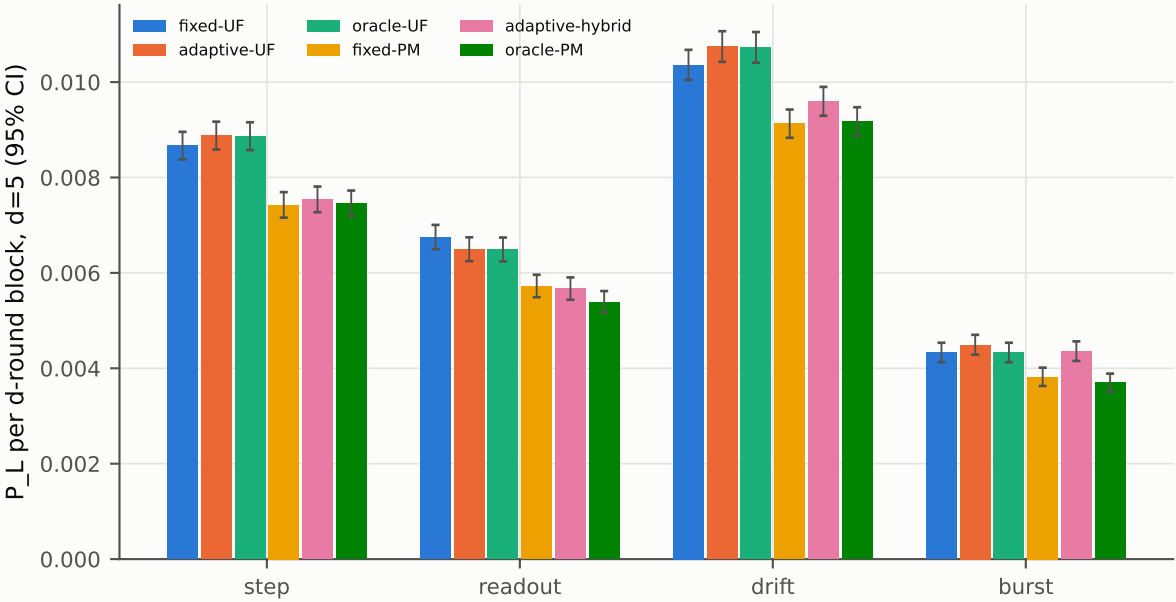
fixed-UF
adaptive-UF
oracle-UF
fixed-PM
adaptive-hybrid
oracle-PM
P_L per d-round block, d=5 (95% CI)
0.000
0.002
0.004
0.006
0.008
0.010
step
readout
drift
burst