

B.1 Reduced Minimum Number of Required Cabin Crew Procedure

1. The reduction shall be allowed for flight departing from any stations except Bangkok (BKK)
2. The minimum number of required cabin crew may be reduced by one cabin crew from the required cabin crew complement according to [Chapter 1.8.1—Minimum Number of Required Cabin Crew](#).
3. Prior to the commencement of the flight, CIC shall coordinate with PIC and Station Manager, taking into consideration the re-seating of passengers regarding vacant crew station or other limitations and the ratio of one cabin crew per passengers in accordance with the Authority's requirement.

The relocation of Able-bodied Passenger to passenger seat at emergency exit nearest to vacant cabin crew station shall be considered.

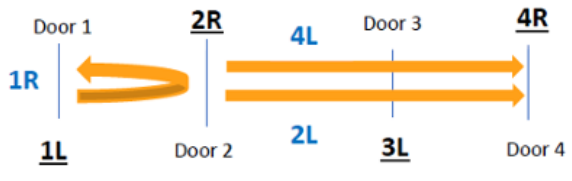
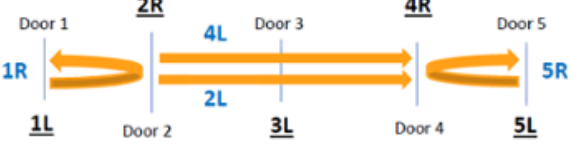
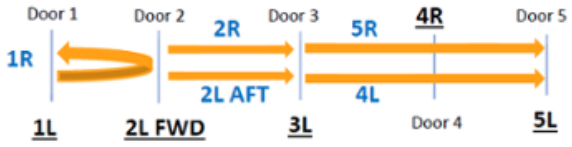
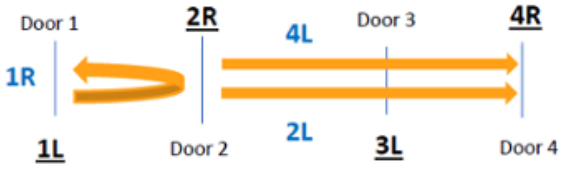
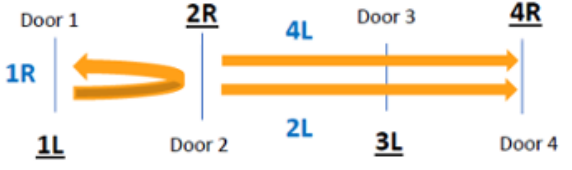
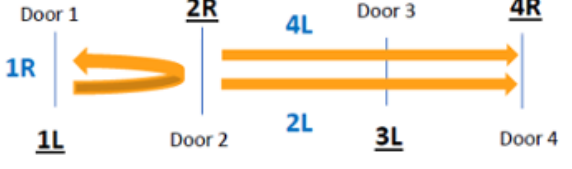
4. Prior to the commencement of the flight, PIC shall inform OC the event of flight operation with reduced minimum number of required cabin crew.
5. CIC shall consult with PIC of the vacant cabin crew station and reassign areas of responsibility of the remaining cabin crew in accordance with the Table of The Vacant Cabin Crew Station below:

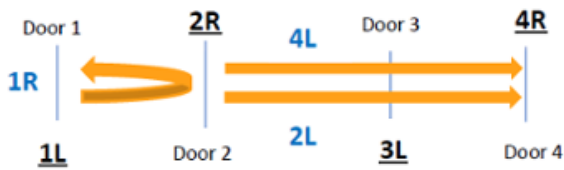
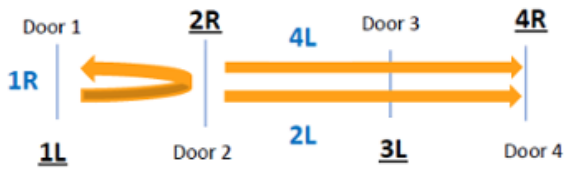
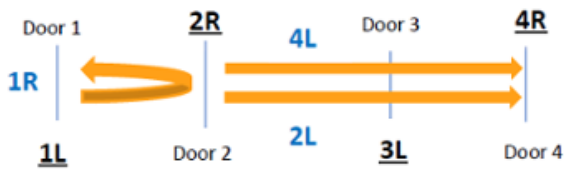
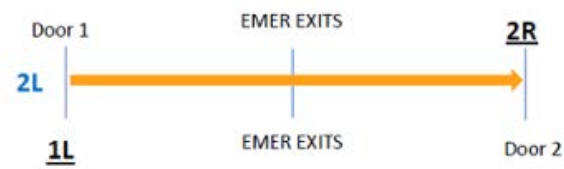
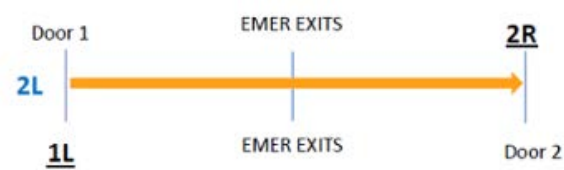
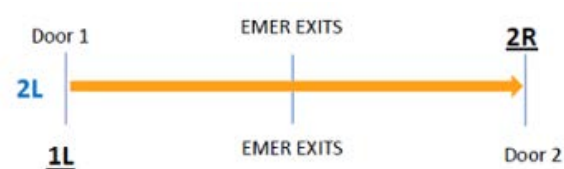
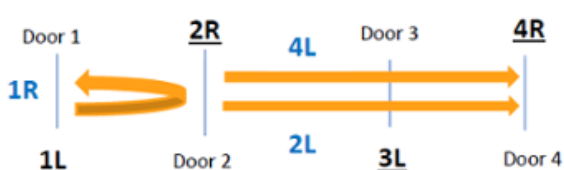
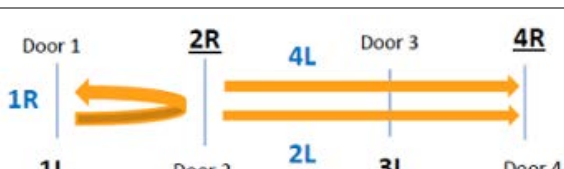
Table of The Vacant Cabin Crew Station		
Aircraft Type	Cabin Version	Vacant Cabin Crew Station
B777-200ER	77E1	3R
B777-300ER	77B1	3R
	77Y1	3R
B787-8	7872	3R
	78B1	3R
	78B2	3R
B787-9	7891	3R
	7892	3R
	78W1	3R
A320-200	3205	1R
	3206	1R
A321neo	3211	1R
A330-300	3305	1R
	3306	1R
A350-900	3591	1R
	3592	1R
	3593	1R
	3594	1R

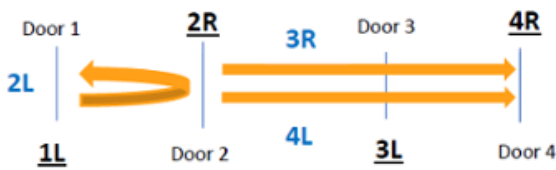
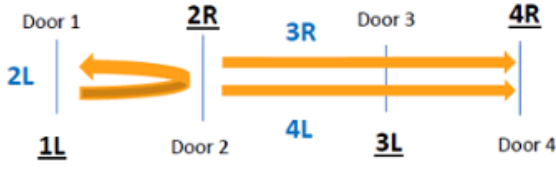
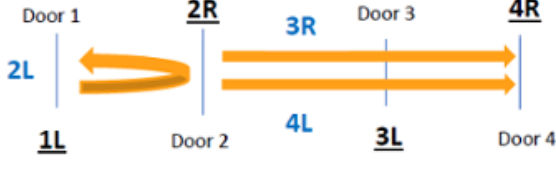
6. CIC briefs cabin crew regarding the assumption of safety and security related duty in normal and emergency situation in accordance with the Table of Assumption of Safety and Security Related Duty in Normal/Emergency Situation below:

Table of Assumption of Safety and Security Related Duty in Normal/Emergency Situation		
Aircraft Type	Cabin Version	Assumption of Duty
B777-200ER	77E1	3L shall assume 3R responsibilities
B777-300ER	77B1	3L shall assume
	77Y1	3R responsibilities
B787-8	7872	3L shall assume 3R responsibilities
	78B1	3L shall assume 3R responsibilities
	78B2	3L shall assume 3R responsibilities
B787-9	7891	3L shall assume 3R responsibilities
	7892	3L shall assume 3R responsibilities
	78W1	3L shall assume 3R responsibilities
A320-200	3205	1L shall assume 1R responsibilities
	3206	1L shall assume 1R responsibilities
A321neo	3211	1L shall assume 1R responsibilities
A330-300	3305	3L shall assume 3R responsibilities
	3306	3L shall assume 3R responsibilities
A350-900	3591	1L shall assume 1R responsibilities
	3592	1L shall assume 1R responsibilities
	3593	1L shall assume 1R responsibilities
	3594	1L shall assume 1R responsibilities

7. CIC shall consider adjusting service when Reduced Minimum Number of Required Cabin Crew Procedure is applied.
8. When performing door operating procedures, two-man crew concept must be applied (using cabin crew from another station).
9. In case safety video does not function or is not available, CIC shall assign cabin crew to perform live safety demonstration and repeat live safety demonstration at the reduced cabin crew's live safety demonstration position.
10. Cabin Safety Check for takeoff and landing shall be performed according to the table below:

Aircraft Type	Cabin Version	Cabin Safety Check
B777-200ER	77E1	
B777-300ER	77B1	
B777-300ER	77Y1	
B787-8	7872	
	78B1	
	78B2	

Aircraft Type	Cabin Version	Cabin Safety Check
B787-9	7891	
	7892	
	78W1	
A320-200	3205	
	3206	
A321neo	3211	
A330-300	3305	
	3306	

Aircraft Type	Cabin Version	Cabin Safety Check
A350-900	3591	
	3592	
	3593	
	3594	
		<i>Note: Cabin crew with the positions underlined are responsible for guarding the exits immediately after the doors are armed.</i>

11. The minimum number of required cabin crew shall not be reduced when Fueling/De-Fueling when passenger are embarking/disembarking/on board.
12. The cabin crew must be aware of the position of servicing and loading vehicles at and near the exits, additionally, in the case of passengers' embarkation.
13. To maintain and manage safety in the cabin while flight operates with reduced minimum number of required cabin crew, the cabin crew should be alert and able to fulfil all responsibilities and perform all duties as required by any situation for all phases of flight in accordance with all applicable normal and emergency procedures.
14. CIC manages and evaluates the time and conditions necessary for the cabin crew taking in-flight rest in case of an emergency.

In case rest on board is required, CIC shall:

- ensure that cabin crew are evenly divided in each rest period
 - ensure that at least one in-charge cabin crew is on duty at all times and PIC shall be informed who is in charge of the cabin at the moment.
15. In case of emergency, identify and locate able-bodied passengers who could help open exits and assist other passengers during evacuation. [See Chapter 4.1.3—Able-bodied Passengers \(ABP\)](#).
 16. In case of CIC is incapacitated, the Next CIC shall be appointed as CIC.
 17. CIC shall submit Safety Report via reporting system.