

Statistical Analysis of the Gulf Coast Geothermal Reservoirs

Abstract

Important parameters of the Gulf Coast geothermal reservoirs are investigated. They are: permeability, porosity, average reservoir temperature, thickness, length (i.e. $\text{area}^{0.5}$), temperature gradient of the earth, reservoir dip angle, injection temperature and well flow rate. The data, used to create the range and distribution of the parameters, come from previous reports on the subject. These data were transformed using appropriate methods and a distribution is fit to the transformed data. An approach for calculating the reservoir dip angle is presented which requires bootstrapping the temperature gradient in the area. This paper provides ground for experimental design and scaling analysis studies.

1. Available data and limitations

The geothermal data used in this study is based on the reports published by Bassiouni (1980) and John et al. (1998). The sources contain the data collected in the Wells-of-Opportunity and Design Wells program, respectively.

In the Wells-of-Opportunity program (1975), the wells were selected from the conventional dry holes based on necessary criteria for potentially productive geopressed geothermal aquifers. The program was designed to quickly provide information on the physical and petrophysical characteristics

July 7, 2014

of a large number of reservoirs from a diverse geographic and geologic area without great expense. Such a program has the limitation of not locating the well in structurally favorable locations and pressure transient tests would not provide the information on the complete reservoir limits. The program finally ranks the fifteen most promising geopressure geothermal prospects in the Louisiana out of sixty-three prospects. These fifteen wells exist in the dataset labeled as Source 1; all of which have reservoir volume and depth information. Only for the best five wells, permeability, porosity and temperature data are available (Bassiouni, 1980).

The Design Well program was conducted between 1979-1990 to provide long term comprehensive information from wells located at optimum reservoir points and designed to produce geopressed brines at high rates from geologically favorable areas (Figure 1). The data contains temperature, depth, porosity, permeability, flow rate and other unused data (see `.csv` file) for all the seventeen wells reported for this program, three of which are located in the state of Texas (John et al., 1998).

Having said all these limitations, we assume that the data is collected randomly and compare the two data sources using t test and ANOVA for any inconsistency. We further prepare a dynamic document, any new information can go into the accompanied `.csv` file and the analysis can be regenerated (Table 1).

We do a t test to compare permeability, porosity and temperature that come from these two data sources. The result of the t test on these parameters are summarized in Table 2.

The true difference in the permeability and porosity mean is equal to zero

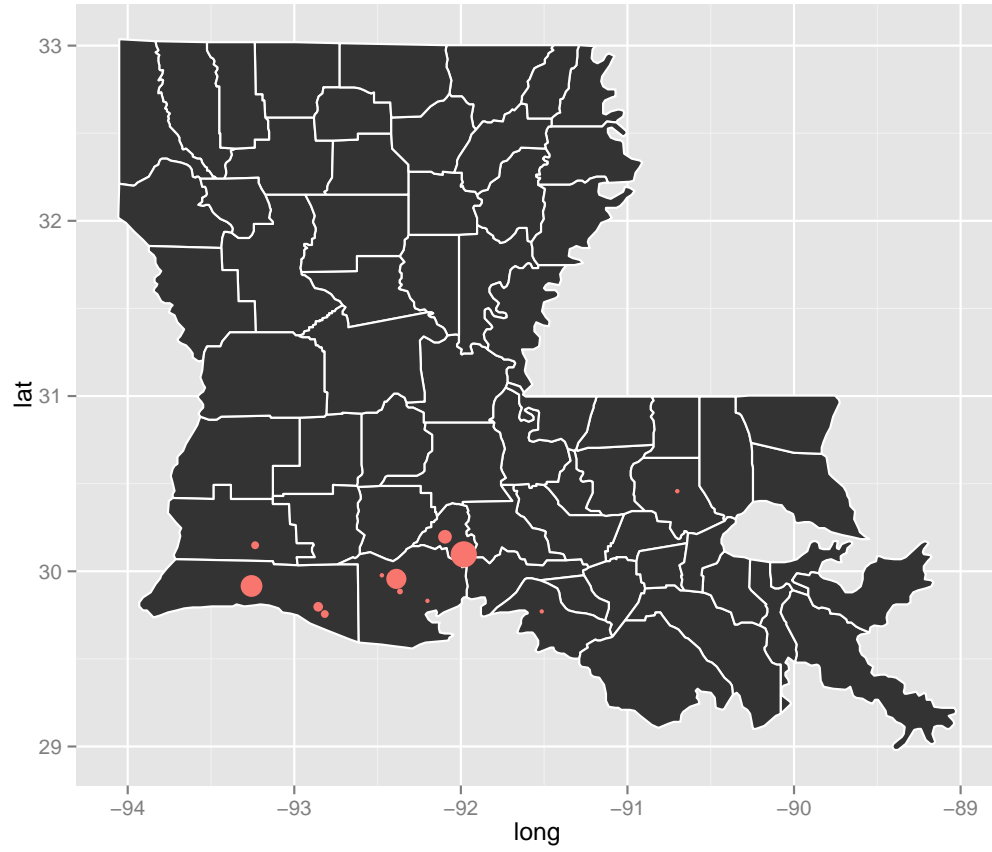


Figure 1: Location of only source 2 geothermal reservoirs. There are also three reservoirs from the Texas which are not shown here. Red dots shows permeability which varies between 7 and 500 md.

	permeability.mD	porosity	temperature.C	thickness.m	length.m
Min.	7.00	12.00	100.00	10.00	10200.00
1st Qu.	21.00	18.00	125.00	83.00	11300.00
Median	85.00	22.00	150.00	114.00	11800.00
Mean	130.00	21.00	150.00	103.00	12200.00
3rd Qu.	200.00	26.00	175.00	137.00	12500.00
Max.	500.00	29.00	200.00	160.00	15800.00

Table 1: Summary of the available data

	df	t	p value
Permeability	10.74	-0.62	0.55
Porosity	5.13	-1.11	0.31
Temperature	11.54	-2.46	0.03

Table 2: Summary of the t test for permeability, porosity and temperature. Null hypothesis is rejected for permeability and porosity showing consistency in the reports.

which indicates that the data that come from the two sources are consistent assuming normality for their underlying theoretical distribution. The t test for the temperature does not reject the null hypothesis indicating that the temperature mean of the groups are different. Nevertheless, this result can be a type two error because the investigation depth of the reports are different. A two way ANOVA is more appropriate for making final conclusion about temperature.

The two way ANOVA test for temperature is summarized in Table 3. The

	Df	Sum Sq	Mean Sq	F value	Pr(>F)
Depth	1	5185.29	5185.29	51.83	0.0000
Source	1	146.12	146.12	1.46	0.2444
Depth:Source	1	111.92	111.92	1.12	0.3059
Residuals	16	1600.56	100.04		

Table 3: Summary of the two way ANOVA on the temperature. The difference in the temperature is caused by the depth.

effect of having different temperature mean is solely due to the depth and not the source confirming the consistency between the reports. Rejecting the null hypothesis for permeability, porosity and temperature also provides some preliminary basis to claim that the hot saline aquifers of the Louisiana have gone through similar depositional environment and diagenetic history.

2. Permeability

The geological processes that create permeability in reservoir rocks appear to leave permeability distributed around the geometric mean (log normal distribution). The permeability is available for most of the wells (Figure 2). The permeability data are transformed using a box-cox transformation (Eq. 1). λ was found to be 0.06. A log-normal distribution is then fit to the transformed data using `fitdistrplus` package (Figure 3, Table 4).

$$Y^* = (Y^\lambda - 1)/\lambda \quad (1)$$

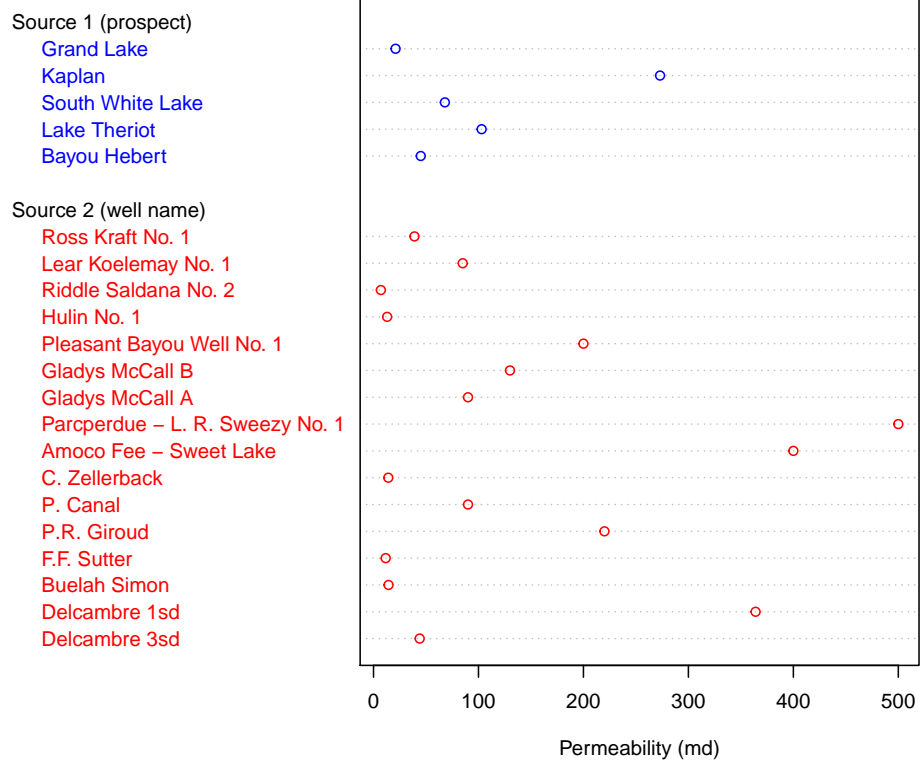


Figure 2: Wells with reported permeability. Some of the wells may have missing data which is clear from the .csv file and we don't plot this graph for each parameter to make the report succinct.

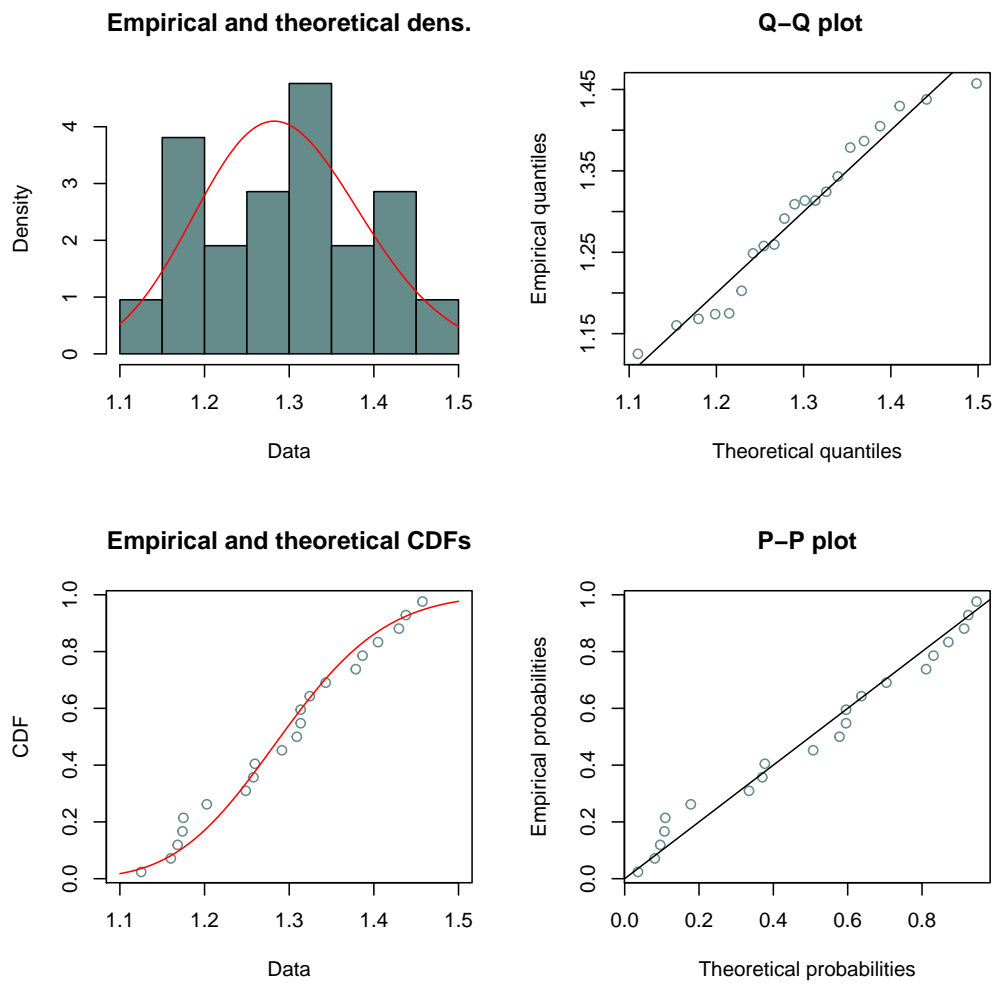


Figure 3: Fitting a log-normal distribution to the box-cox transformed permeability.

permeability.mD	
meanlog	0.25
sdlog	0.08

Table 4: Summary of the log-normal fit to the permeability

3. Porosity, thickness, length and temperature

The main underlying assumptions is that the samples represent all the geothermal reservoirs in the Louisiana and sum of the geological processes that has created them, has left them having a normal distribution. Porosity, thickness, length and temperature data (Figure 4) were transformed using a normal score transform (Figure 5) and a Gaussian distribution is then fitted on them (Figure 6). Distribution fitting results are summarized in Table 5.

	porosity	thickness.m	length.m	temperature.C
mean	21.88	103.42	12198.87	133.72
sd	4.07	35.18	1317.48	16.73

Table 5: Summary of the gaussian fit to the porosity, thickness, length and temperature

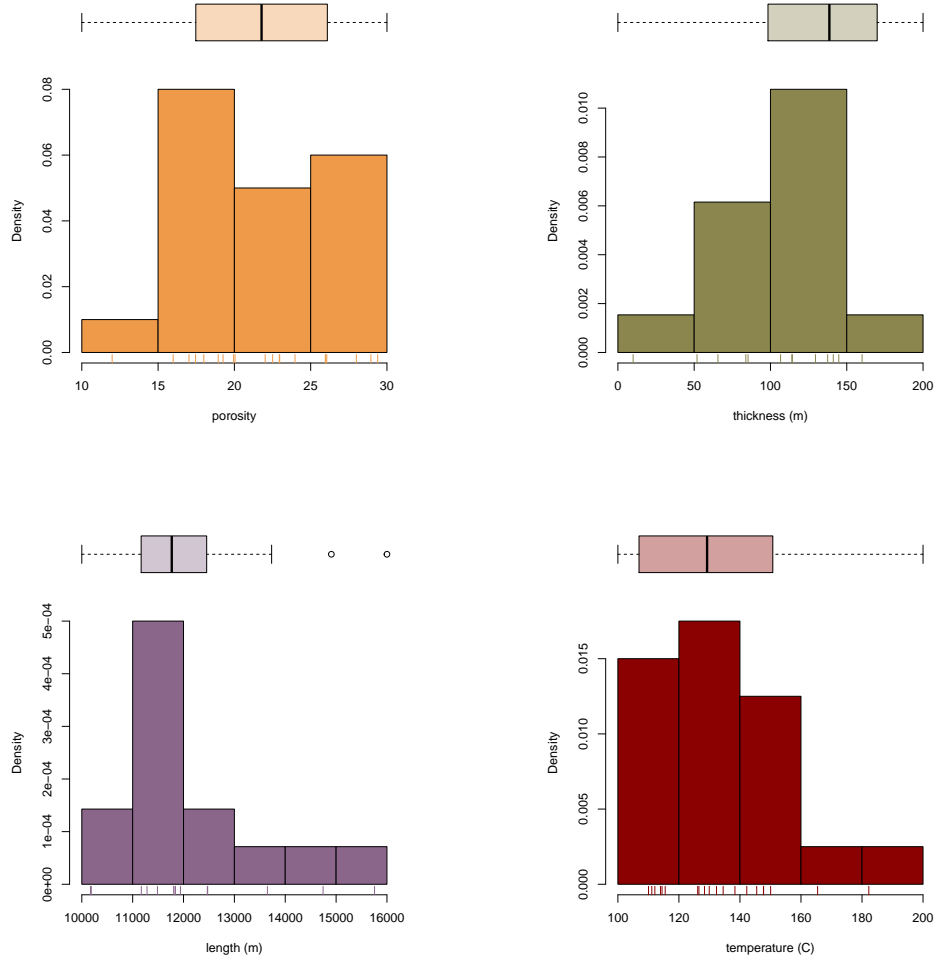


Figure 4: Parameter distributions before transformation. Data values are shown below the histogram as tiny lines and the box plot shows the quantiles of each parameter. The most likely value for the reservoir thickness and length lies between 100-150 m and 11000-12000 m respectively. The most likely value for the porosity and temperature are between 15-20 and 120-140 °C, respectively.

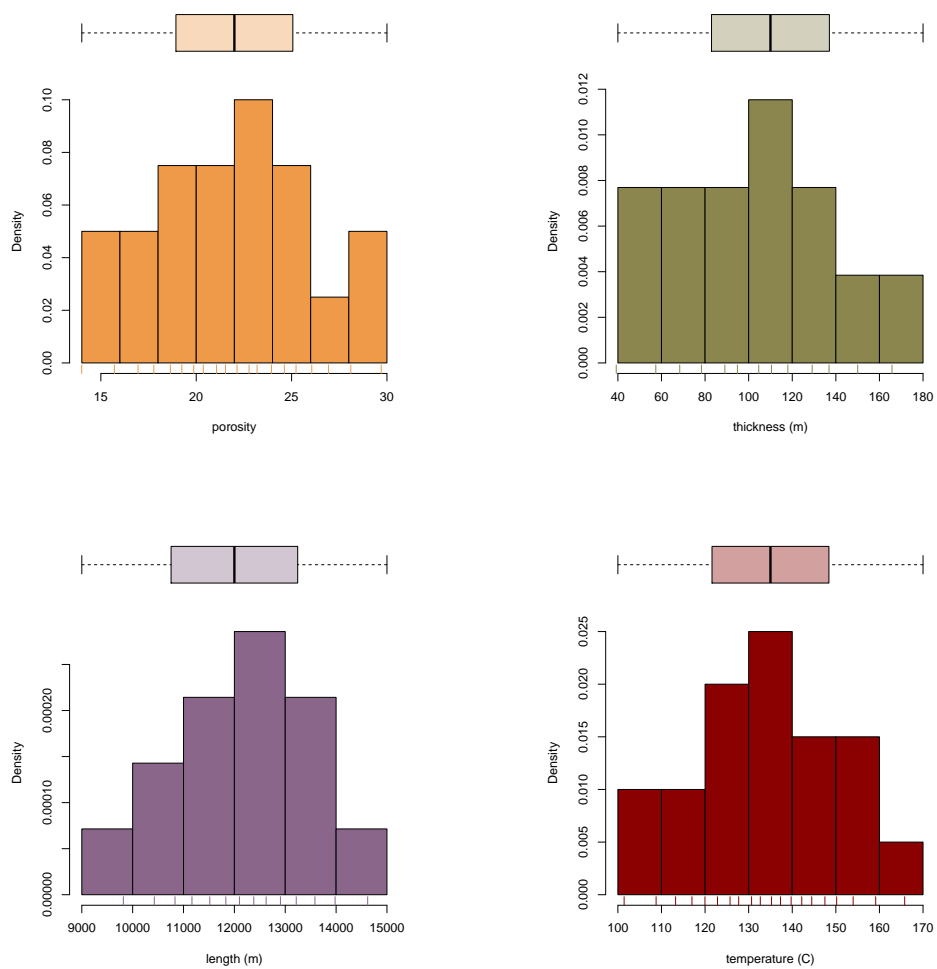


Figure 5: Normalized parameter distributions using normal score transform

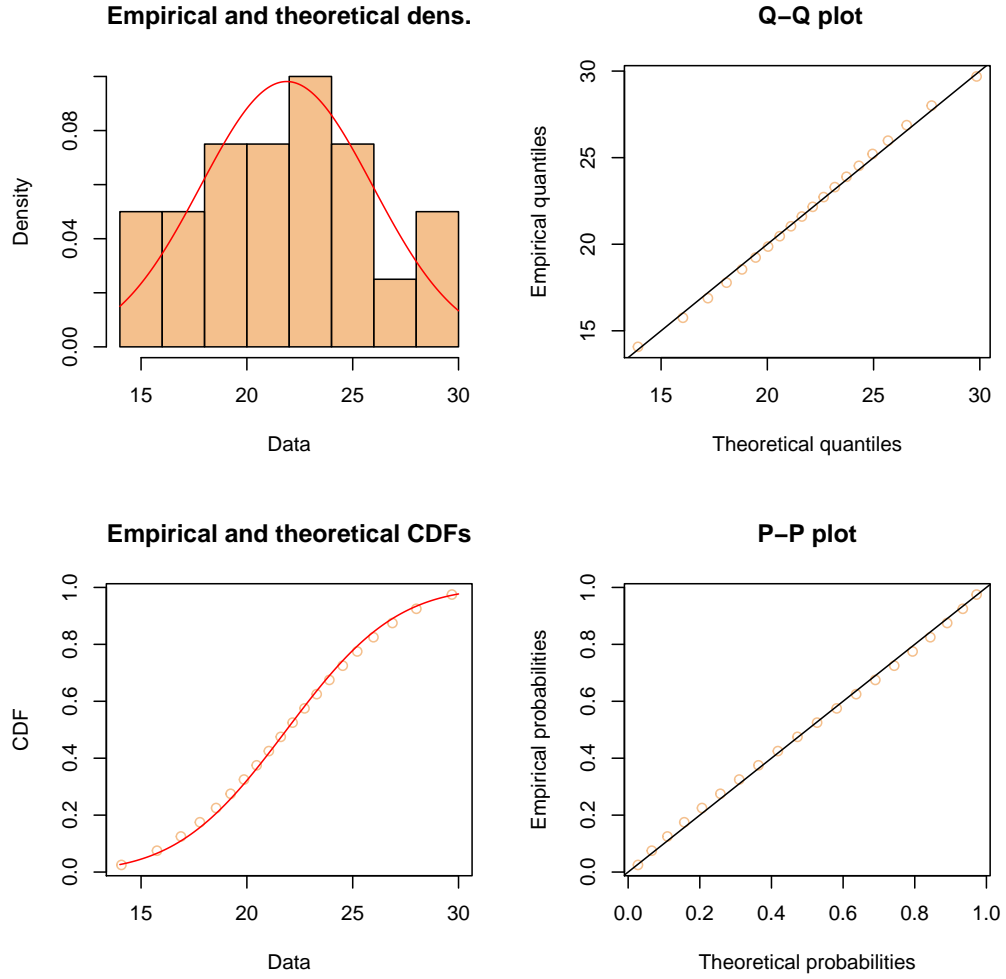


Figure 6: Gaussian distribution fitted to the normalized porosity. As expected, both Q-Q and the CDF plot indicate good fit.

4. Geothermal gradient

Geothermal gradient of the earth appears in the buoyancy dimensionless number. The mean geothermal gradient varies from less than 15 C/km to more than 50C/km on a regional basis. Depending on the lithology, this variation can be up to a factor of 5 or more in a single well (Tester et al., 2006). Gray and Nunn (2010) has studied the geothermal gradient for the wells on the Guyana dome and concluded that sediments shallower than 3900 m have an average thermal gradient of 23 C/km. They suggest a geothermal gradient of 28.9 C/km from the depth of 3900 to 5000 m based on the well temperature data and contributes it to geopressed layers formed by rapid sedimentation. Average geothermal gradient is around 25 C/km in most of the world (Fridleifsson et al., 2008) and it turned out to be very close to the averaged value for the whole sedimentary section estimated in this study. We used depth and temperature data from the wells to estimate the geothermal gradient (e.i. regression coefficient, Figure 7).

To establish a confidence interval for the calculated geothermal gradient without assuming any underlying theoretical distribution, a repeated random sampling with replacement (bootstrapping) is performed (Figure 8, White (2013)).

5. Reservoir dip angle

According to Gray and Nunn (2010), the range of the dip angle for Camerina A reservoir is from 1.2° to 28°. Calculating the reservoir dip angle by investigating the gradient of the structural maps is challenging. Further, we are interested in the average reservoir dip angle and not the local dip angle.

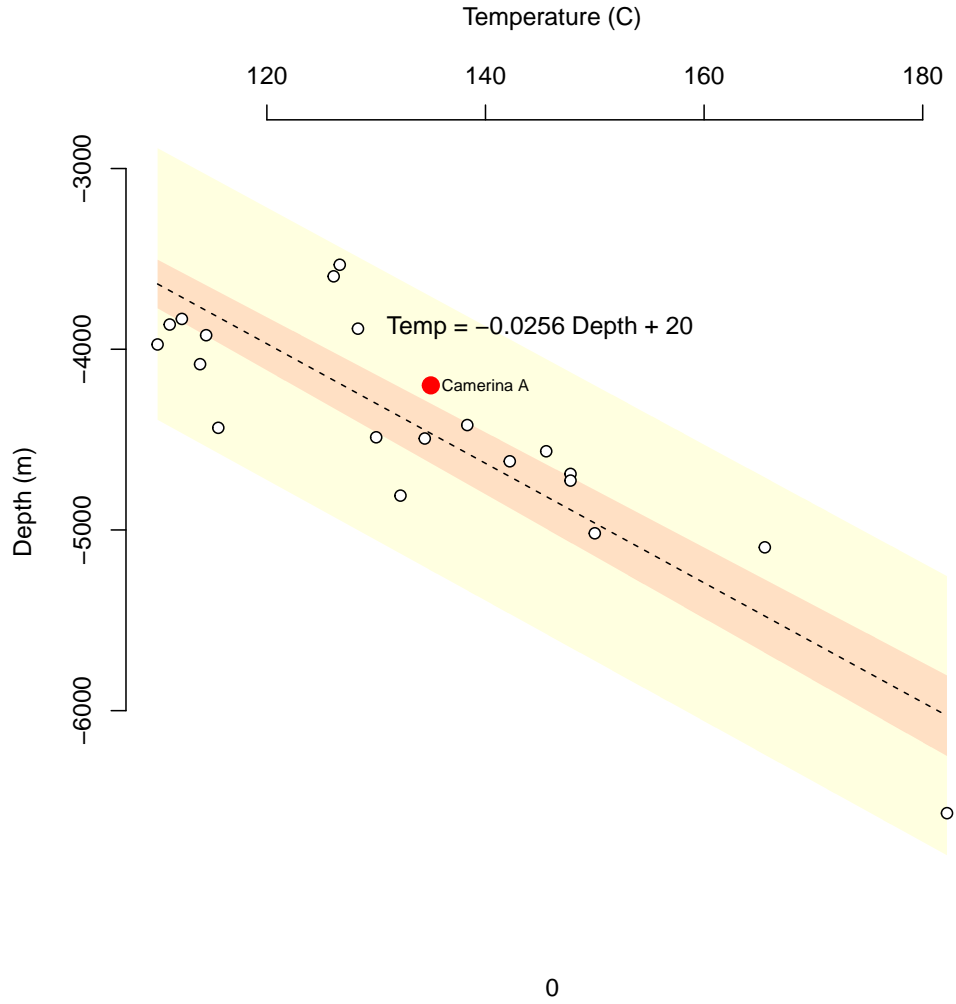


Figure 7: The dark tan region shows 95% confidence interval band around the predicted mean for the temperature of the geothermal reservoirs in Louisiana at each depth. Average geothermal gradient is around 25 °C/km in most of the world (Fridleifsson et al., 2008) and the average value estimated here turned out to be very close. The light tan shows the 95% confidence interval for the mean of any random sample. Camerina A reservoir is used to test the model and the model seems to be acceptable. Source code is modified from White (2013).

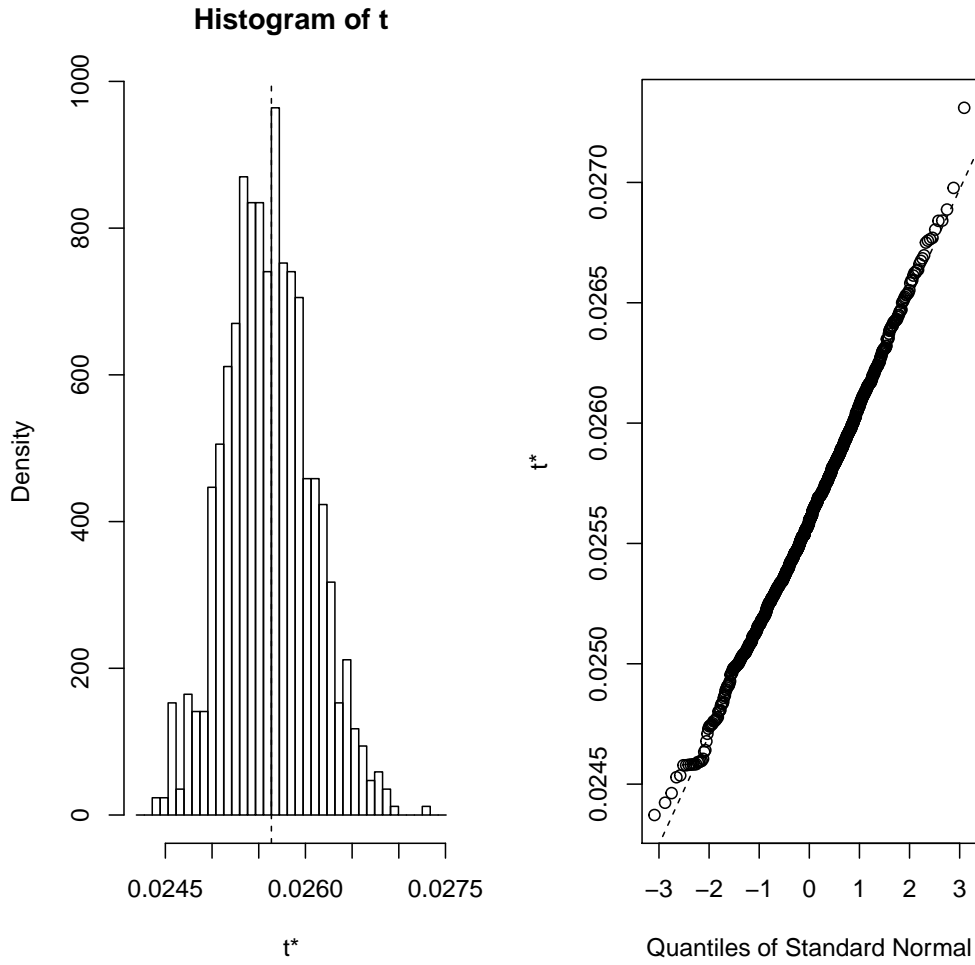


Figure 8: Bootstrapped geothermal gradient of the earth for hot saline aquifers of the Louisiana. As expected, the value calculated for the mode is the same as the slope of the previous figure. The average geothermal gradient changes in the range 0. 024-0.027.

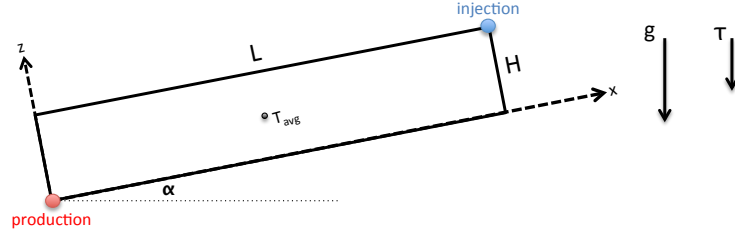


Figure 9: Regular design.

Exploratory data analysis is used to calculate this average dip angle (Diggle and Ribeiro, 2007). It is done by recognizing that the temperature of the Louisiana's geopressed-geothermal reservoirs would remain lower than T_{max} and by using reservoir's temperature gradient, average temperature and its length (Figure 9). Since no 'a priori' exists about where the average reservoir temperature or bottomhole temperature attributes to, we assume that the data are sampled uniformly along the reservoir assigning the average reservoir temperature to $(L/2, H/2)$. Available data can be used to calculate this T_{max} using Eq. 9.

$$\alpha = \sin^{-1} \left(\frac{2(T_{max} - T_{avg})}{\tau L} \right) \quad (2)$$

in which:

$$\tau \sim \mathcal{N}(\mu_{\tau}, \sigma_{\tau}^2) \quad (3)$$

$$T_{avg} \sim \mathcal{N}(\mu_T, \sigma_T^2) \quad (4)$$

$$L \sim \mathcal{N}(\mu_L, \sigma_L^2) \quad (5)$$

$$T_{max} = ? \quad (6)$$

Knowing that the dip angle of Eq. 2 can not be more than 90 degrees, we can find T_{max} with the probability of $0.99 * 0.99 = 0.9801$ by constraining the fraction in Eq. 2 to its maximum (i.e. one) which means:

$$\frac{2(T_{max} - T_{avg})}{\tau L} \leq 1 \quad (7)$$

$$T_{max} \leq T_{avg} + \frac{\tau L}{2} \quad (8)$$

$$T_{max} = (\mu_T - 3\sigma_T) + \frac{(\mu_\tau - 3\sigma_\tau)(\mu_L - 3\sigma_L)}{2} \quad (9)$$

Once T_{max} is found to be ca. $183^\circ C$, we can solve Eq. 2 using a sampling method (Kroese et al., 2011). We used Hammersley Sequence Sampling to sample average temperature, geothermal gradient and reservoir's length for finding the dip angle of the layers (Figure 10). The median of the dip angle is ca. 15° and . If we exclude the outliers, it is unlikely to have a reservoir with the dip angle of more than ca. 60° . The lower quartile is ca. 2.5° and the upper quartile is ca. 25° .

6. Injection temperature

Injection temperature reduces the temperature of the reservoir. In binary power plants, the discharge temperature varies in a large range $25-90^\circ C$ (Tester et al., 2006). Average annual surface temperature for the Louisiana is ca. $20^\circ C$ (www.ncdc.noaa.gov); so it is more likely that the injection temperature further reduces to this temperature. Though the range of injection temperature is known, no 'a priori' knowledge of the distribution form is available. When there is a most likely value within a range but no 'a priori' knowledge, a triangular distribution is appropriate (Figure 11, Jensen

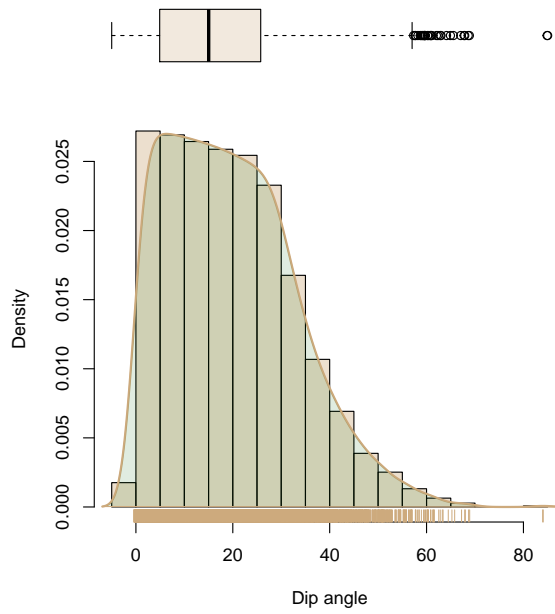


Figure 10: Distribution of the Gulf Coast geothermal reservoir's dip angle. The median of the dip angle is ca. 15° and . If we exclude the outliers, it is unlikely to have a reservoir with the dip angle of more than ca. 60°. The lower quartile is ca. 2.5° and the upper quartile is ca. 25°.

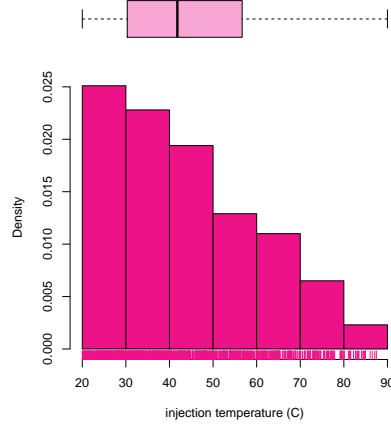


Figure 11: injection temperature for binary power plants

(2000)). The triangle is defined using the range 20-90 °C and it's most likely value as 20 °C.

For downhole heat exchangers, the injection temperature is a function of its production section's length, its middle length, its injection section's length, input temperature and other factors such as working fluid, casing and tubing diameter, etc (Fig. 12). A DHE with working fluid injected through the tubing and brine passing the casing is known as WFT (working fluid through tubing) which has higher efficiency compared with other designs. DHE's total length varies between ca. 150 and 300 m which makes the injection temperature varying from ca. 120 down to 40 C respectively for an input temperature of ca. 150 C, and flow rate of ca. 400 m³.day⁻¹, assuming engineering assumptions for other parameters (Feng, 2012). A uniform distribution can be used for DHE's injection temperature because no 'a priori' knowledge is available.

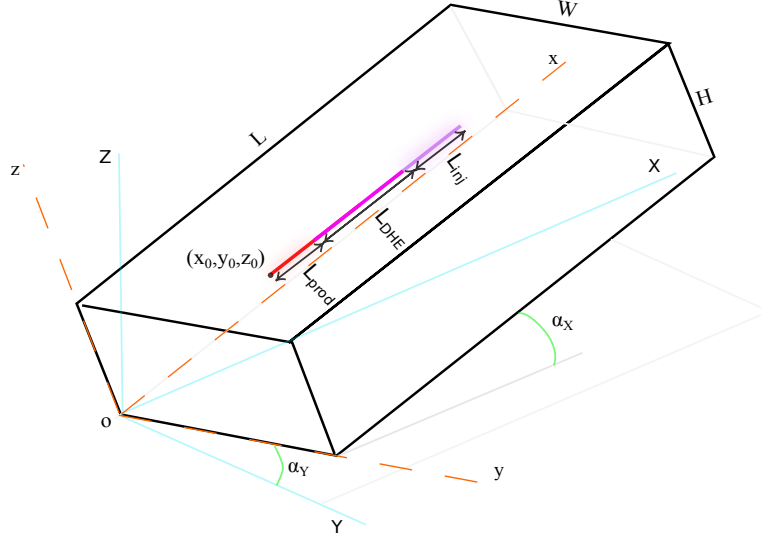


Figure 12: DHE scheme that is being used for dimensional analysis.

7. Flow Rate

Flow rate is also a very important parameter and rate of power generation directly depends on it. It seems the reported flow rate for the well tests are restricted by TPR curves because the reservoir models can sustain higher rates. In fact Gulf Coast geopressedured aquifers came to attention for their geohydraulic potential rather than their geothermal energy (Hawkins, 1977). McMullan and Bassiouni (1984) realizing that maximizing flow-rate maximizes NPV in geopressedured geothermal reservoirs, showed that the effect of tubing size and skin overwhelms other effects such as well location with respect to aquifers. Their study indicates that these reservoirs can sustain higher than $6350 \text{ m}^3 \cdot \text{day}^{-1}$ ($40000 \text{ bbl} \cdot \text{day}^{-1}$) and up to $17500 \text{ m}^3 \cdot \text{day}^{-1}$ ($110000 \text{ bbl} \cdot \text{day}^{-1}$) for maximum of 5 years. The well test data shows a flow

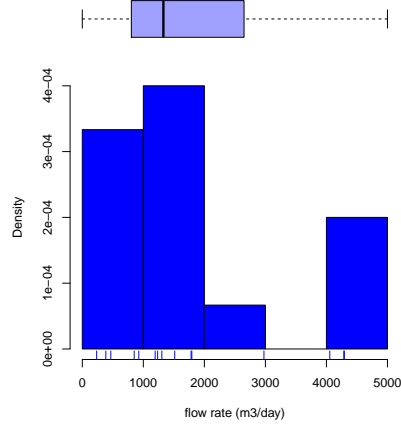


Figure 13: Well test data for flow rate

rate of ca. 250 to 4250 $\text{m}^3.\text{day}^{-1}$ (Figure 13). A uniform distribution can be used for flow rate because there is no priori knowledge of the distribution and based on the current data, we can certainly say that the variable cannot take values outside well test recorded range.

Previous DHE designs have single point fluid inlet and single point or a length fluid for outletting the fluid and are insulated from the reservoir (Feng, 2012). However the new designs are evolving into having a length for production and a length for injection. Also, the DHE's middle (main) length is not isolated from the reservoir (Ildar, personal communication) and its flow rate is lower than conventional heat exchangers (ca. 450 $\text{m}^3.\text{day}^{-1}$ or 5.25 kg.s^{-1}) (Feng, 2012) which seemingly cannot be increased due to DHE's limitations such as sand production, pump capacity, etc. (Ildar, personal communication).

References

- Bassiouni, Z., 1980. Evaluation of potential geopressure geothermal test sites in southern louisiana. Tech. rep., Louisiana State Univ., Baton Rouge (USA). Dept. of Petroleum Engineering.
- Diggle, P., Ribeiro, P. J., 2007. Model-based geostatistics. Springer.
- Feng, Y., 2012. Numerical study of downhole heat exchanger concept in geothermal energy extraction from saturated and fractured reservoirs. Ph.D. thesis, University of Louisiana.
- Fridleifsson, I. B., Bertani, R., Huenges, E., Lund, J. W., Ragnarsson, A., Rybach, L., et al., 2008. The possible role and contribution of geothermal energy to the mitigation of climate change. In: IPCC scoping meeting on renewable energy sources, proceedings, Luebeck, Germany. Vol. 20. Citeseer, pp. 59–80.
- Gray, T., Nunn, J., 2010. Geothermal resource assessment of the gueydan salt dome and the adjacent southeast gueydan field. Vermilion Parish, Louisiana: Gulf Coast Association of Geological Societies Transactions 60, 307–323.
- Hawkins, M. F. J., 1977. Investigations on the geo-pressure energy resource of southern louisiana. Tech. rep., Final report to ERDA on contract No. AT-(40-1)-4889, Louisiana State University.
- Jensen, J. L., 2000. Statistics for petroleum engineers and geoscientists. Vol. 2. Gulf Professional Publishing.

- John, C., Maciasz, G., Harder, B., 1998. Gulf coast geopressured-geothermal program summary report compilation. volume 2-a: Resource description, program history, wells tested, university and company based research, site restoration. Tech. rep., Louisiana State Univ., Basin Research Inst., Baton Rouge, LA (United States).
- Kroese, D. P., Taimre, T., Botev, Z. I., 2011. Handbook of Monte Carlo Methods. Vol. 706. John Wiley & Sons.
- McMullan, J. H., Bassiouni, Z., 1984. Prediction of maximum flow rates from geopressured aquifers. *Journal of petroleum technology* 36 (3), 503–509.
- Tester, J. W., Anderson, B. J., Batchelor, A., Blackwell, D., DiPippo, R., Drake, E., Garnish, J., Livesay, B., Moore, M., Nichols, K., et al., 2006. The future of geothermal energy. *Massachusetts Institute of Technology* 358.
- White, C. D., 2013. Statistical Reservoir Modeling, Course Notes.