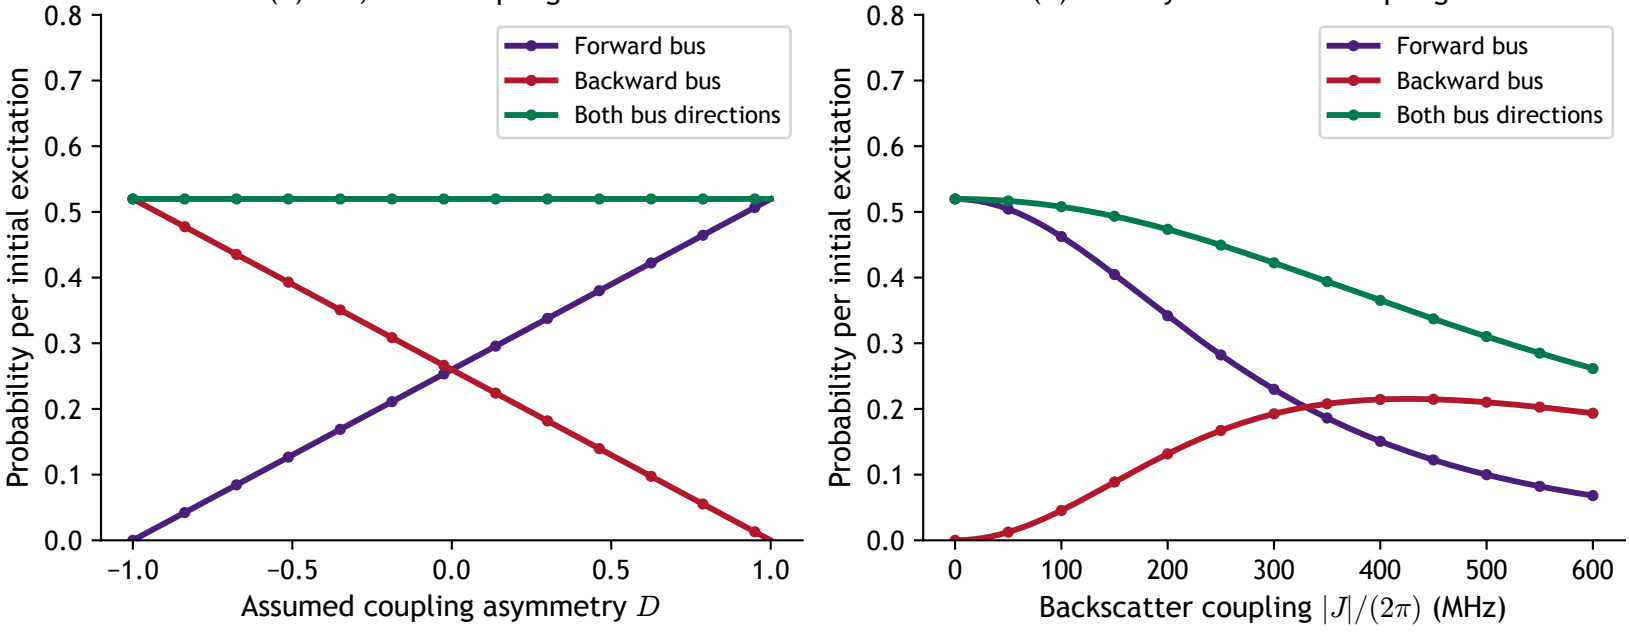
(a) J=0; total coupling fixed
Forward bus
Backward bus
Both bus directions
Probability per initial excitation
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
−1.0
−0.5
0.0
0.5
1.0
Assumed coupling asymmetry $D$
(b) Initially directional coupling: D=1
Forward bus
Backward bus
Both bus directions
Probability per initial excitation
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0
100
200
300
400
500
600
Backscatter coupling $|J|/(2\pi)$ (MHz)