

2.1	Characteristics	5
2.2	Solution advantages	5
4.1	Dimension	8
5.1	Typical application circuits	10
5.2	Description of the visualization upper computer	10
7.1	Installation instructions	15
9.1	Effect of antenna cover on millimeter wave sensor performance	18
9.2	Antenna cover design principles	18
9.3	Common materials	20

Table 1	Pin definition table	9
Table 2	Format of reported data frames	12
Table 3	Format of data within the frame	12
Table 4	Table of performance and electrical parameters	17
Table 5	Common material properties of antenna covers	20
Figure 1	Effect of the upper computer function demonstration.....	4
Figure 2	Comparison of millimeter wave radar solutions and other solutions.....	6
Figure 3	Module size diagram.....	8
Figure 4	Module pin definition diagram.....	9
Figure 5	Diagram of wall mounting.....	14
Figure 6	Radar wall mounting angle identification.....	14
Figure 7	Schematic diagram of the tracking range when the radar is wall mounted (wall height 1.5 m).....	14

Motion target tracking is to track the position of the moving target in the region in real time, and realize the distance, angle and speed measurement of the moving target in the region. The LD2450 is a motion target tracking sensor module from the Hilink 24G millimetre wave radar series, which includes extremely simplified 24 GHz radar sensor hardware and intelligent algorithm firmware. The solution is mainly used in general indoor scenarios such as homes, offices and hotels to enable the location tracking of moving human bodies.

The sensor hardware consists of an AIoT millimetre wave radar chip, a high performance one-transmitter-two-receiver microstrip antenna and a low cost MCU and peripheral auxiliary circuitry. The intelligent algorithm firmware uses FMCW waveforms and the radar chip's proprietary advanced signal processing technology.

It supports serial output of detection data, which is plug-and-play and can be flexibly applied to different smart scenarios and end products.

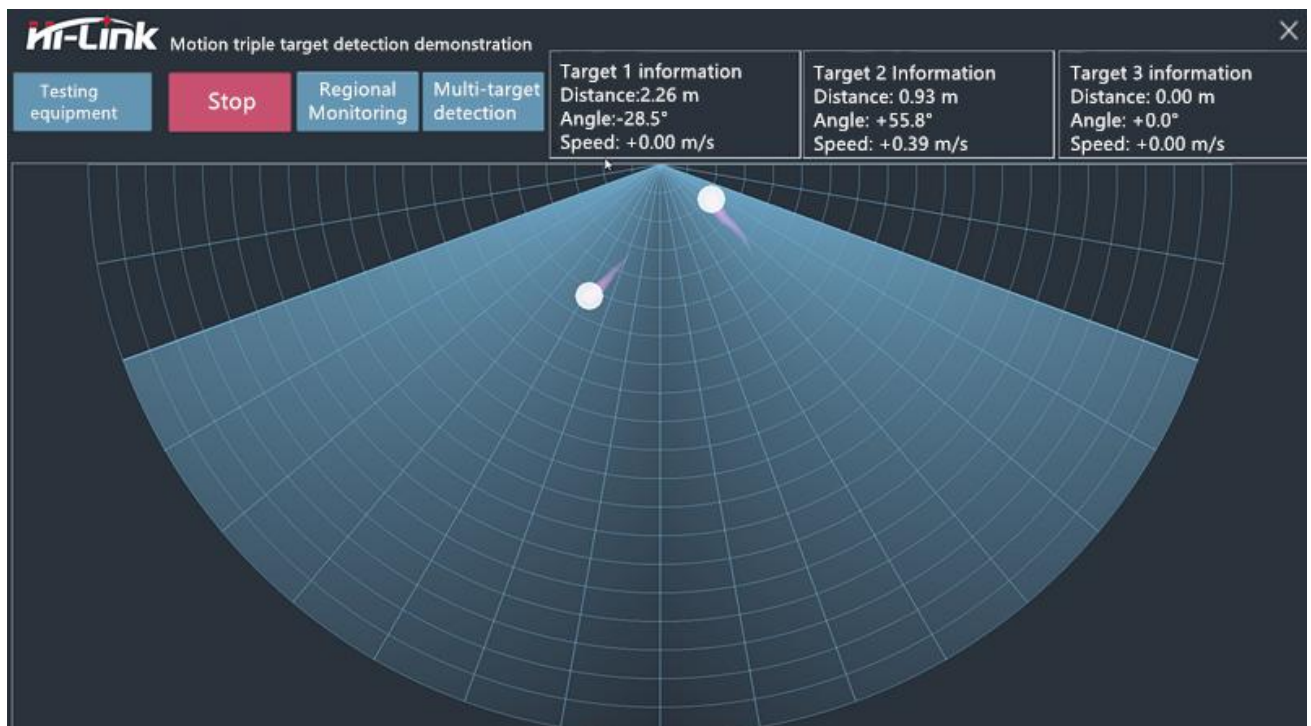


Figure 1 Effect of the upper computer function demonstration

- 24 GHz ISM band
- Integrated intelligent millimeter wave radar chip and intelligent algorithm firmware
- Precise motion target localization and tracking
- Longest detection range 6m
- Ultra-small module size: 15mm x 44mm
- Wall mounting
- Azimuth angle $\pm 60^\circ$, pitch angle $\pm 35^\circ$
- The ultimate cost-effective choice
- Multiple connection options with pin and socket interface

LD2450 human body sensing module adopts 24GHz millimeter wave radar sensor technology, compared with other programs, has obvious advantages in human body sensing applications:

1. In addition to sensitive sensing of the movement of the human body, for the traditional program can not identify the micro-movement of the human body can also be sensitive to sense;

2. Good environmental adaptability, the induction effect is not affected by the surrounding environment such as temperature, brightness, humidity and light fluctuations;

3. Good shell penetration, can be hidden inside the shell work, no need to open holes in the product surface, improve the product aesthetics;

The LD2450 motion target tracking sensor can accurately locate and track targets and is widely used in various AIoT scenarios, covering the following types:

Sensing the distance and angle of the human body, reporting the detection results for the main control module to intelligently control the operation of air conditioners, fans and other home appliances.

Position sensing, within the set position interval to identify the human body approaching or moving away, timely lighting or closing the screen.

Smart toilet accurately controls the automatic opening and closing of the toilet lid.

Identify and sense the human body, precise position detection, can be used in home lighting devices (sensor lamps, desk lamps, etc.).


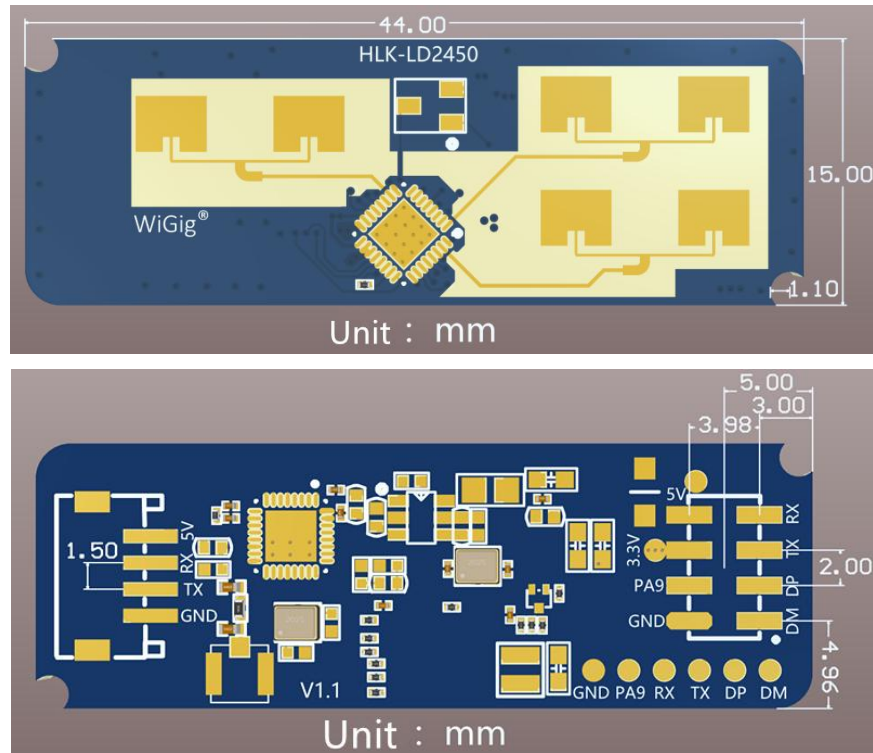



Figure 3 Module size diagram

The module provides two kinds of external interfaces, socket and pin, both of which have a serial port and a power supply port, so users can choose to use either of them as needed.

The dimensions of the pin interface are shown below:

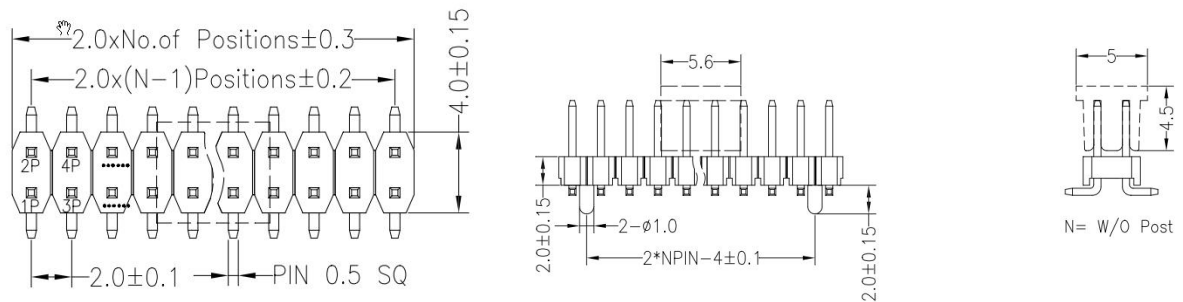

Socket interface dimensions are shown below:

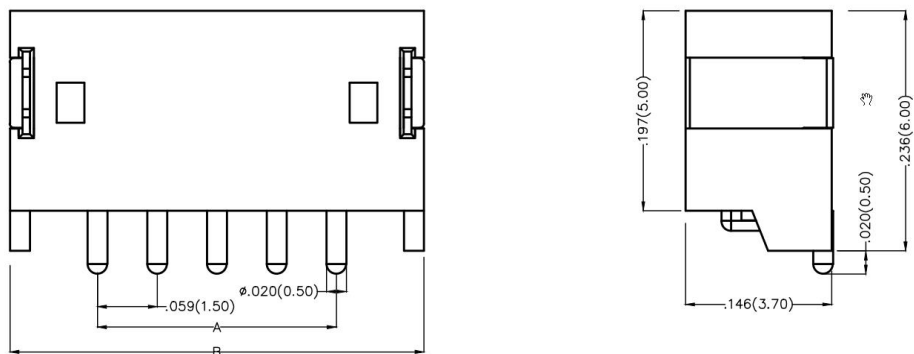

:

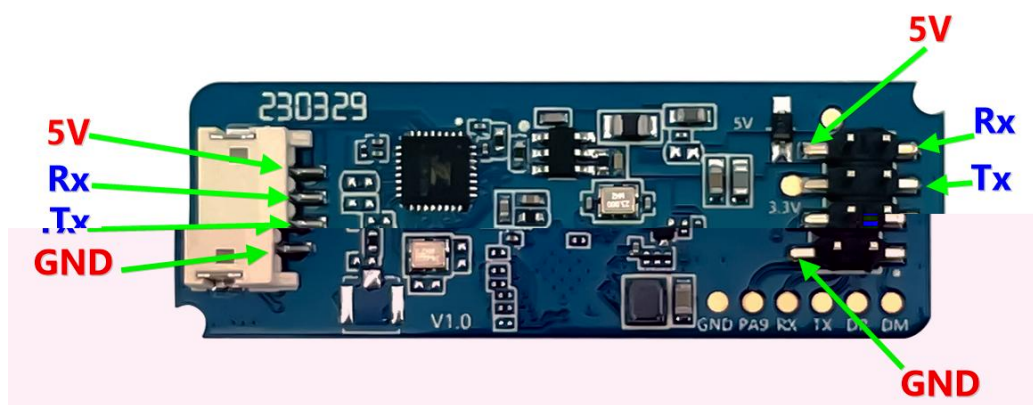


Figure 4 Module pin definition diagram

	Power supply input 5V
	Power Ground
	Serial port Tx pins
	Serial port Rx pins

Table 1 Pin definition table


LD2450 module directly through the serial port in accordance with the prescribed protocol for the output of the detection results data, the serial output data contains up to three targets position and speed and other information, the user can be used flexibly according to the specific application scenarios.

The module power supply voltage is 5V, and the power supply capacity of the input power supply is required to be greater than 200mA.


The module IO output level is 3.3 V. The default baud rate of the serial port is 256000, with 1 stop bit and no parity bit.

We provide LD2450's visualization upper computer demonstration software, which is convenient for users to experience the radar module's positioning and tracking effect on the target.

1. Use USB to serial tool to connect the module serial port correctly, module pin description please check [Table 1 pin definition table](#);
2. Open the ICLM_MTT.exe host tool software, click the detect device button, the host software automatically search the LD2450 module through the serial port;
3. After detecting the module, the host software will have the following prompt.

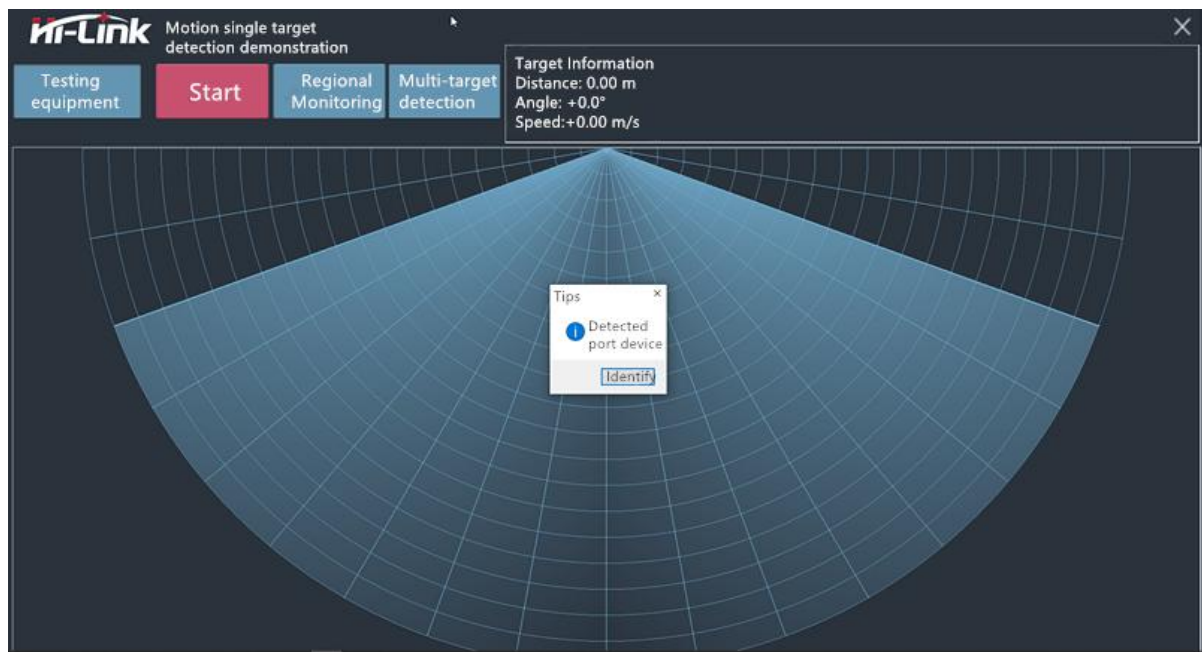

4. Then click the Start button, the host software will receive the detection data reported by the LD2450 module and display it on the software surface in real time.

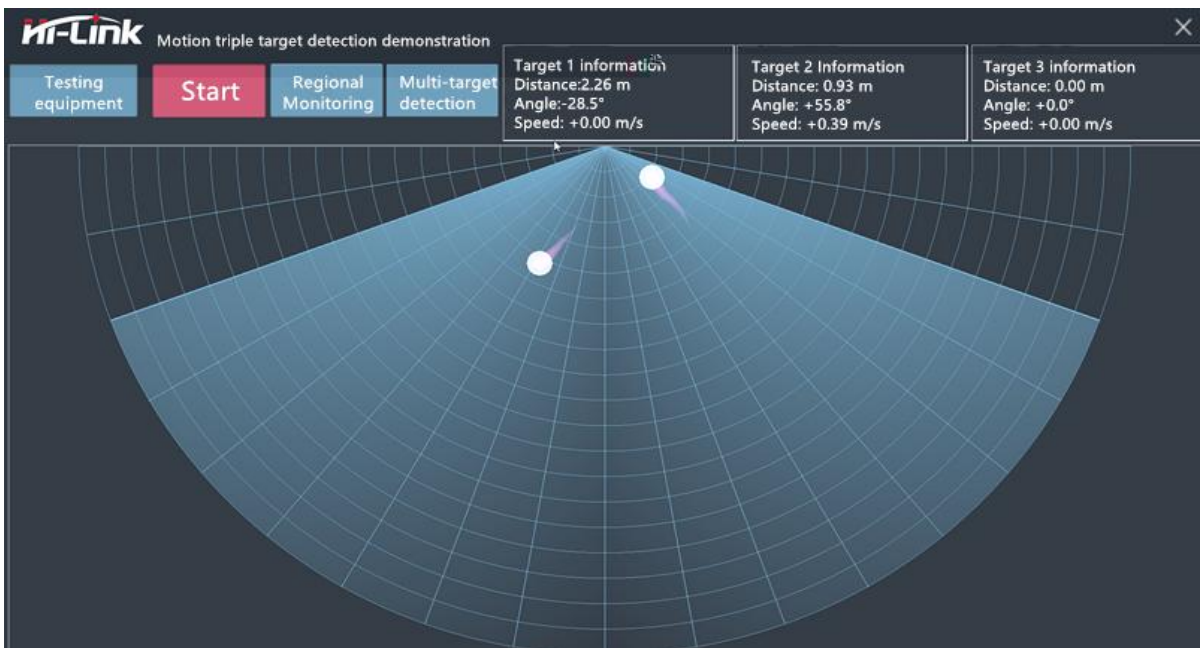

The display includes real-time positions of up to three targets on a sector map, distance, angle and speed information for each target.

The LD2450 module communicates with the outside world through a serial port with a default baud rate of 256000, 1 stop bit, and no parity bits.

The radar outputs information about the detected target, including x-coordinates in the area, y-coordinates, and the velocity value of the target. The data format reported by the radar is shown in the table below and is reported at 10 frames per second.

AA FF 03 00	Goal 1 information Goal 2 information Goal 3 information	55 CC

Table 2 Format of reported data frames

The specific information contained in the individual targets is shown in the table below:

signed int16 type, highest bit 1 corresponds to positive coordinates, 0 corresponds to negative coordinates, unit is mm	signed int16 type, the highest bit 1 corresponds to positive coordinates, 0 corresponds to negative coordinates, the unit is mm	signed int16 type, the highest bit 1 corresponds to the positive speed, 0 corresponds to the negative speed, and the other 15 bits correspond to the speed, the unit is cm/s	uint16 type, the size of a single distance gate, the unit is mm

Table 3 Format of data within the frame

Example data:

This set of data indicates that the radar is currently tracking a target i.e. target 1 (blue field in the example), target 2 and target 3 (corresponding to the red and black fields in the example, respectively) do not exist, so their corresponding data fields are

0x00. The process of converting the data of target 1 into relevant information is demonstrated as follows:

Objective 1 x-coordinate: $0x0E + 0x03 * 256 = 782$

$$0 - 782 = -782 \text{ mm}$$

Objective 1 y-coordinate: $0xB1 + 0x86 * 256 = 34481$

$$34481 - 2^{15} = 1713 \text{ mm}$$

Goal 1 speed: $0x10 + 0x00 * 256 = 16$

$$0 - 16 = -16 \text{ cm/s}$$

Target 1 distance resolution: $0x40 + 0x01 * 256 = 360 \text{ mm}$

The typical installation method of LD2450 is wall mounting, as shown in Figure 5, the farthest positioning tracking distance is 6m. wall mounting needs to consider the application scenario of shading and top interference, the recommended installation height range is 1.5~2m.

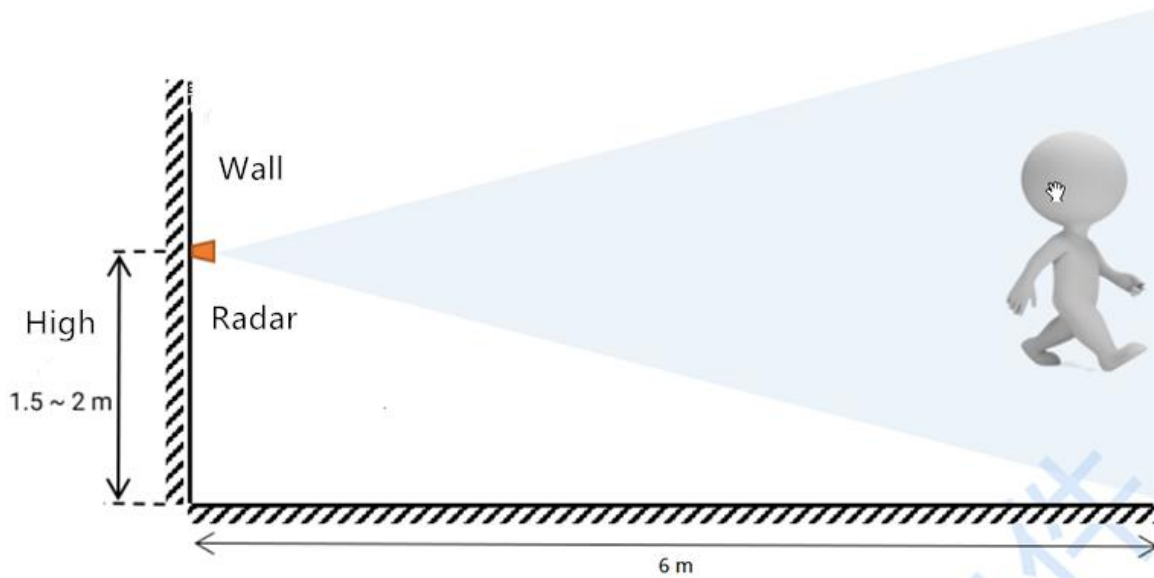


Figure 5 Diagram of wall mounting

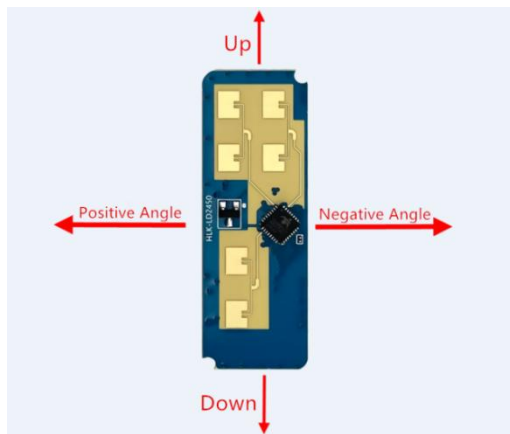


Figure 6 Radar wall mounting angle identification

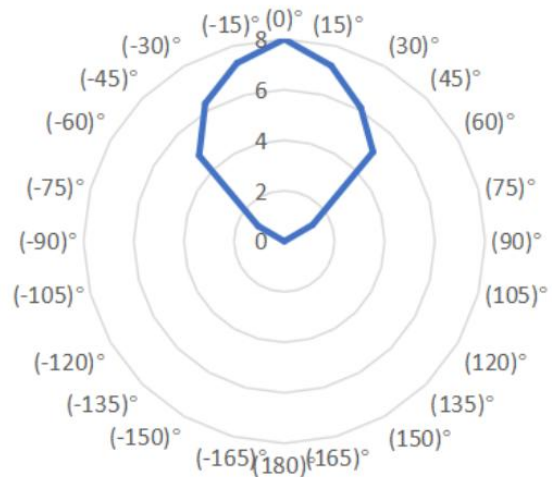


Figure 7 Schematic diagram of the tracking range when the radar is wall mounted (wall height 1.5 m)

is $\pm 60^\circ$ centered normal to the rear antenna plane.

If the radar needs to install the housing, the housing must have good wave transmission characteristics at 24 GHz and cannot contain metallic materials or materials that have a shielding effect on electromagnetic waves.

This product needs to be installed in a suitable environment, the detection effect will be affected if used in the following environments:


- The presence of continuous movement of non-human objects in the sensing area, such as animals, continuously swinging curtains, large green plants facing the air outlet, etc.
- There is a large area of strong reflective objects in the sensing area, strong reflective objects will cause interference to the radar antenna.
- When hanging wall installation, need to consider the indoor top of the air conditioning, electric fan and other

- When multiple 24 GHz band radars are present, do not install them in the direction directly opposite to the beam, but as far away as possible to avoid possible mutual interference.

	24GHz~ 24.25GHz Comply with FCC, CE, Commission-free certification standards
	DC 5V, power supply capacity >200mA
	120 mA
	FMCW
	One UART
	Detection and tracking of up to three targets
	6m
	$\pm 60^\circ$
	10Hz
	250MHz Compliant with FCC, CE, Commission-free certification standards
	-40 ~ 85°C
	15mm x 44 mm


Table 4 Table of performance and electrical parameters

- Radar waves are reflected on the radome boundary
 1. The total power radiated or received by the radar is lost
 2. The reflected wave enters the receiving channel, affecting the isolation between the transmitting and receiving channels
 3. The reflection may make the antenna's standing wave worse, further affecting the antenna gain
- Radar wave propagation in the medium will occur loss, theoretically the higher the frequency loss will be greater
- The electromagnetic wave will be refracted to a certain degree when passing through the medium
 1. Affect the radiation direction map of the antenna, which in turn affects the coverage of the sensor

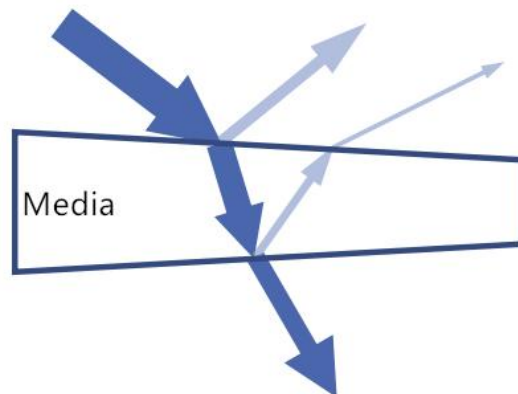

- Smooth and flat surface, uniform thickness. Such as flat or spherical surface, not uneven
- If there is surface coating, it cannot contain metal or conductive material

- Above the antenna, the antenna surface is parallel to the antenna surface
- The ideal height is an integer multiple of the half-wavelength of electromagnetic waves in the air
- $H = \frac{m}{2} * \frac{c_0}{f}$, where m is a positive integer, c_0 is the vacuum speed of light, f is the working center frequency.
- For example, 24.125GHz center frequency, its half-wavelength in the air is about 6.2mm
- The ideal thickness is an integer multiple of the half-wavelength of the electromagnetic wave in the medium
- $D = \frac{m}{2} * \frac{c_0}{f\sqrt{\epsilon_r}}$, where m is a positive integer, ϵ_r is the relative dielectric constant of the radome material
- For example, an ABS material $\epsilon_r = 2.5$, its half wavelength of about 3.92mm

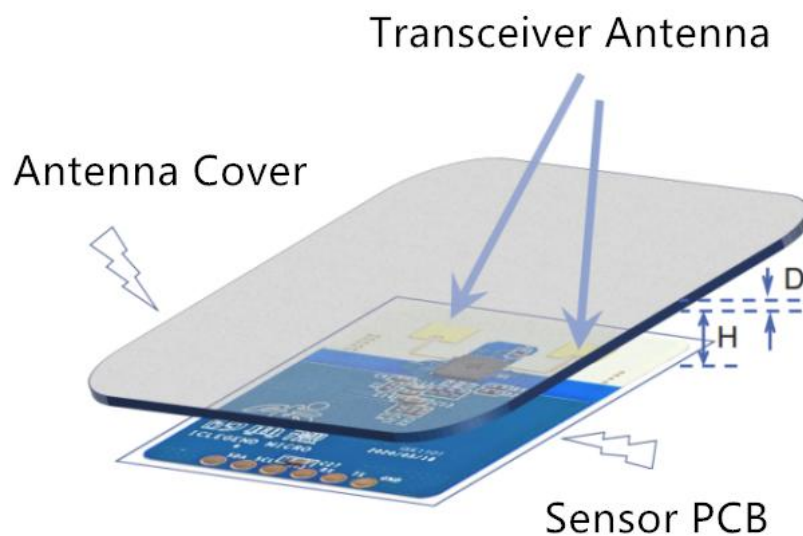

- The table on the right is for reference only, Please confirm the actual value with the supplier

Common material properties (based on 24.125GHz)

Medium	ϵ_r Typical value	Half wavelength (mm)	1/8 wavelength (mm)	1/10 wavelength (mm)
Air	1.00	6.20	1.55	1.24
ABS1	1.50	5.06	1.27	1.01
ABS2	2.50	3.92	0.98	0.78
PC material	3.00	3.58	0.89	0.72
PMMA acrylic 1	2.00	4.38	1.10	0.88
PMMA acrylic 2	5.00	2.77	0.69	0.55
PVC hard	4.00	3.10	0.78	0.62
PVC soft	8.00	2.19	0.55	0.44
High density PE	2.40	4.00	1.00	0.80
Low density PE	2.30	4.09	1.02	0.82
Quartz glass	5	2.77	0.69	0.55

- When space allows, 1 or 1.5 times Wavelength is recommended.
- For example, 12.4 or 18.6mm is recommended for 24.125GHz
- Error control: $\pm 1.2\text{mm}$
- Recommended half wavelength, error control $\pm 20\%$
- If the thickness requirement of half wavelength cannot be met
- Low ϵ_r material is recommended
- Thickness recommended 1/8 wavelength or thinner
- The effect of inhomogeneous materials or multi-layer combination of materials on radar performance is recommended for experimental adjustment during design

Table 5 Common material properties of antenna covers

Date

Version

Mo



Address: 1705, 17/F, Building E, XingheWORLD, Minle Community, Minzhi Street,
Longhua District, Shenzhen

Tel: 0755-23152658/83575155

Email: sales@hlktech.com

Website: <https://www.hlktech.net/>

This device complies with part 15 of the FCC Rules. Operation is subject to the following two

conditions:

(1) This device may not cause harmful interference, and

(2) this device must accept any interference received, including interference that may cause

undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance

could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital

device, pursuant to part 15 of the FCC Rules. These limits are designed to

provide reasonable

protection against harmful interference in a residential installation. This equipment generates

uses and can radiate radio frequency energy and, if not installed and used in accordance with the

instructions, may cause harmful interference to radio communications. However, there is no

guarantee that interference will not occur in a particular installation. If this equipment does

cause harmful interference to radio or television reception, which can be determined by turning

the equipment off and on, the user is encouraged to try to correct the interference by one or

more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled

environment. This equipment should be installed and operated with minimum distance 20 cm

between the radiator & your body.