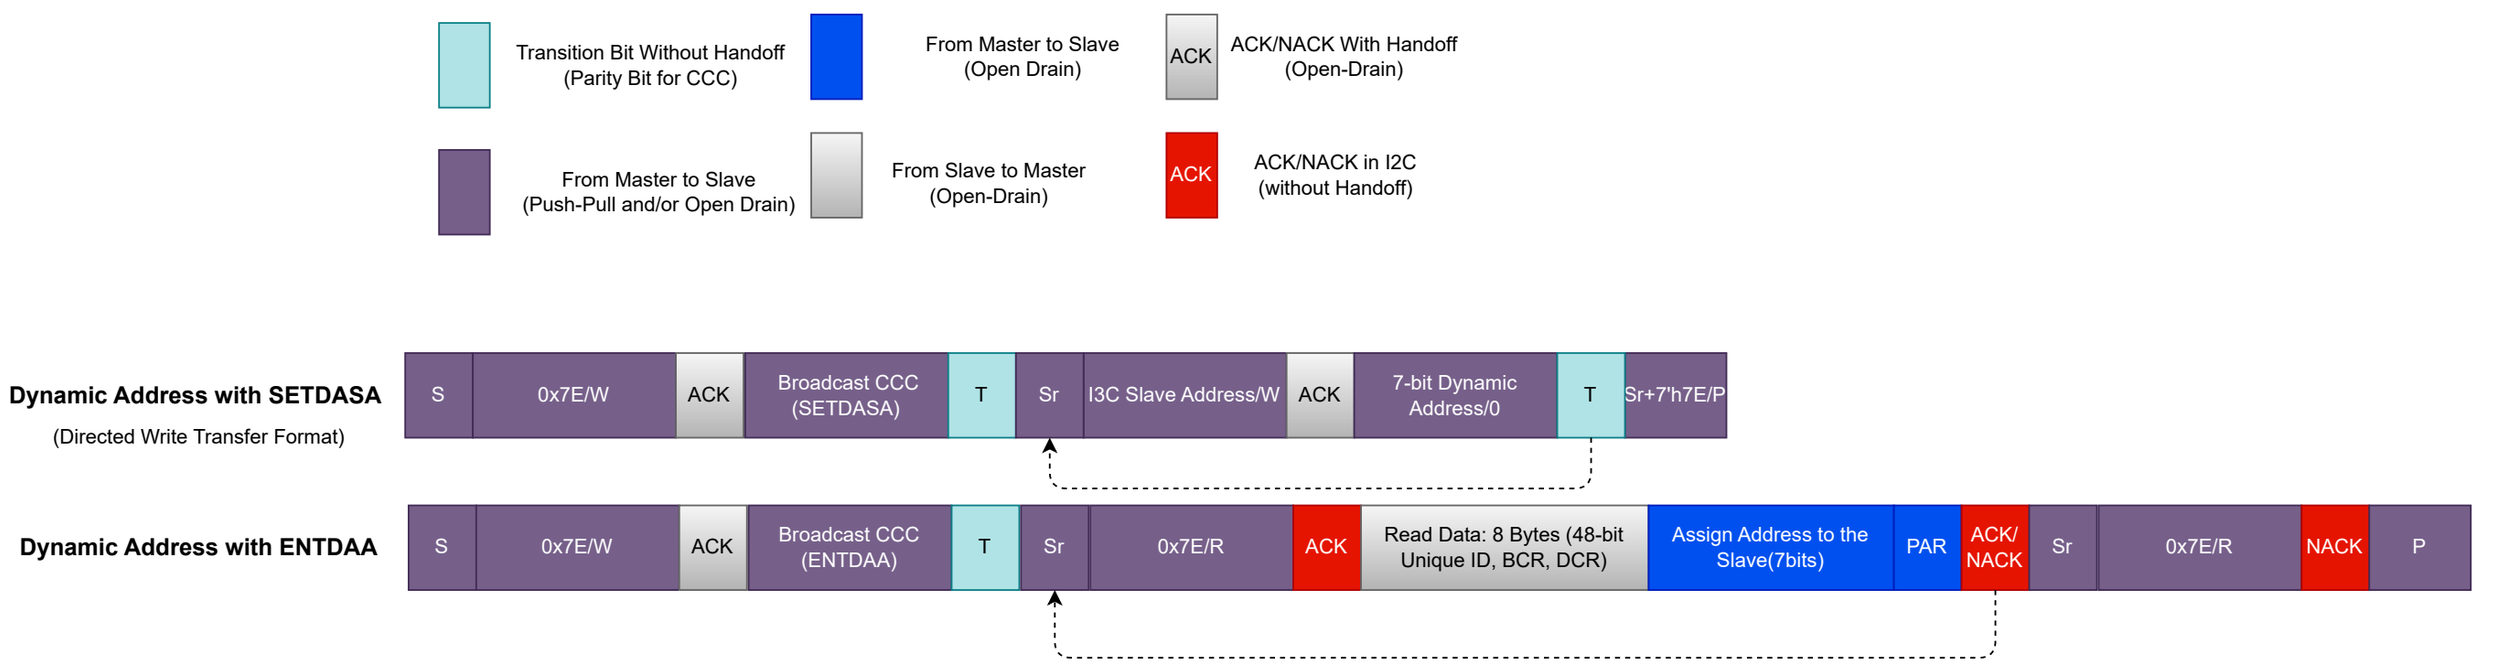

Transition Bit Without Handoff
(Parity Bit for CCC)
From Master to Slave
(Open Drain)
ACK
ACK/NACK With Handoff
(Open-Drain)
From Master to Slave
(Push-Pull and/or Open Drain)
From Slave to Master
(Open-Drain)
ACK
ACK/NACK in I2C
(without Handoff)
Dynamic Address with SETDASA
(Directed Write Transfer Format)
S
0x7E/W
ACK
Broadcast CCC
(SETDASA)
T
Sr
I3C Slave Address/W
ACK
7-bit Dynamic
Address/0
T
Sr+7'h7E/P
Dynamic Address with ENTDAA
S
0x7E/W
ACK
Broadcast CCC
(ENTDAA)
T
Sr
0x7E/R
ACK
Read Data: 8 Bytes (48-bit
Unique ID, BCR, DCR)
Assign Address to the
Slave(7bits)
PAR
ACK/
NACK
Sr
0x7E/R
NACK
P