


ADC_SAR1_TRIGGER_MODE = 2 (SW), ADC_SAR1_CONTINUE_MODE_EN = 0; ADC_XPD_WAIT = 2, ADC_RSTB_WAIT = 1 (drawable stand-ins)
x axis is the ADC working clock; the waits count SAR conversions, T_conv compressed (24 clk real)

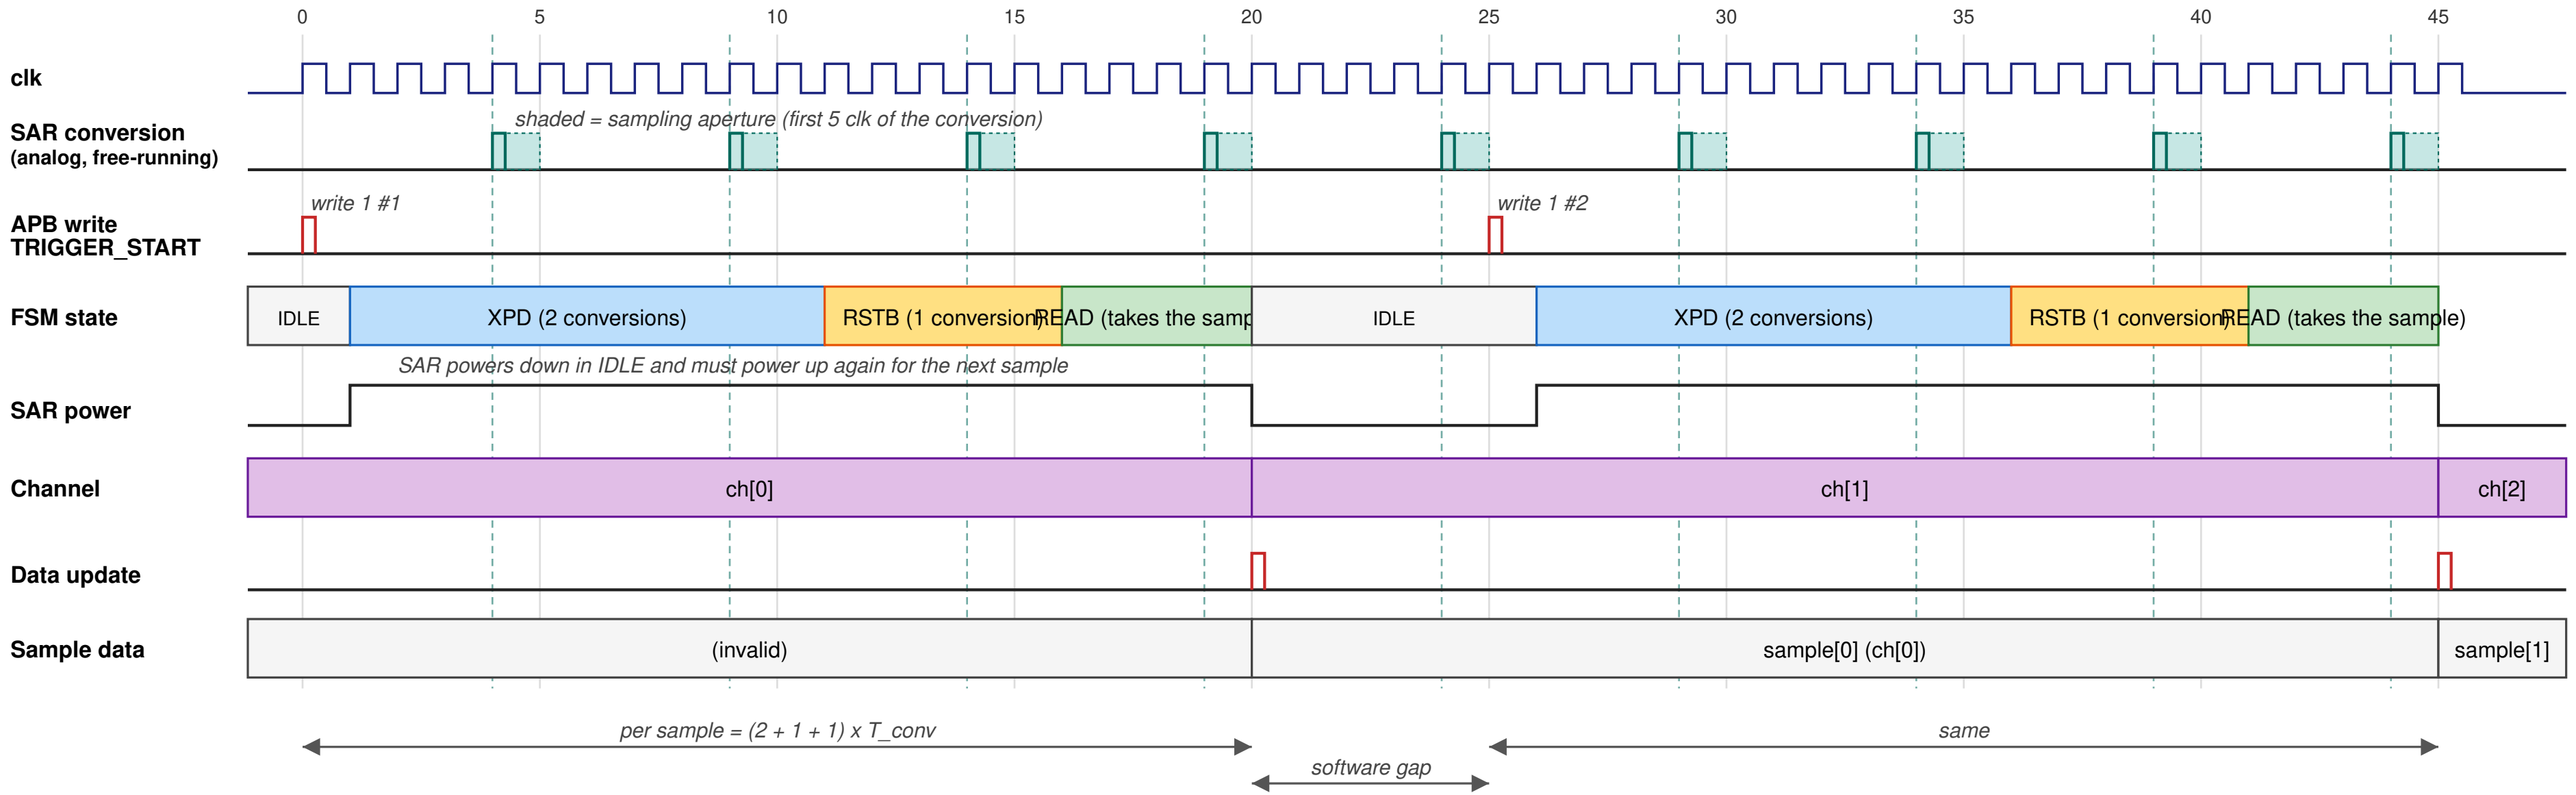

XPD power-up wait

RSTB (channel settling)

READ (sampling)

current channel

SAR conversion + aperture

data update pulse