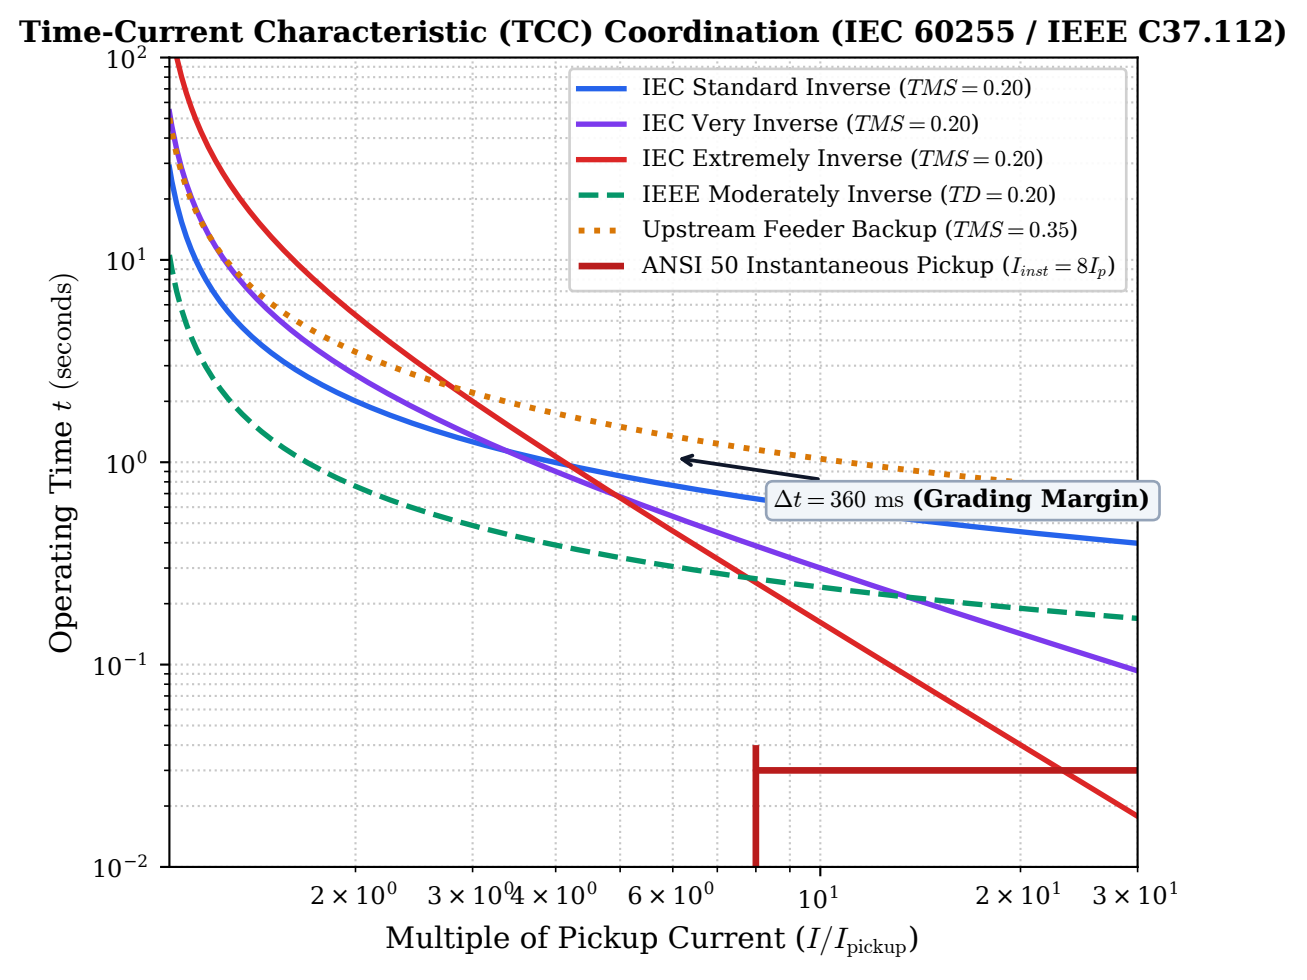
Time-Current Characteristic (TCC) Coordination (IEC 60255 / IEEE C37.112)
IEC Standard Inverse ($TMS = 0.20$)
IEC Very Inverse ($TMS = 0.20$)
IEC Extremely Inverse ($TMS = 0.20$)
IEEE Moderately Inverse ($TD = 0.20$)
Upstream Feeder Backup ($TMS = 0.35$)
ANSI 50 Instantaneous Pickup ($I_{inst} = 8I_p$)
$\Delta t = 360$ ms (Grading Margin)
Operating Time t (seconds)
10^{2}
10^{1}
10^{0}
10^{-1}
10^{-2}
2×10^{0}
3×10^{0}
4×10^{0}
6×10^{0}
10^{1}
2×10^{1}
3×10^{1}
Multiple of Pickup Current (I/I_{pickup})