Faculty of Engineering and Information Technology

Human Body 3D Scanner (Virtual me)

Esteban Andrade

12824583

Supervisor: Dr. Teresa Vidal Calleja

October 17, 2020

Contents

Engineering Reseach Problem

1.1 Reseach Question

"Human Body 3D Scanner: The development of software for 3D data reconstruction of a Human body scanner with multiple sensors"

1.2 Project Contextualization

The project is based on creating a Human Body 3D scanner. It will have two specific streams that include the development of the mechatronic design of a 3D scanner for a human and the software development for 3D data reconstruction. This proposal is based on developing the software for 3D data modelling and reconstruction of the Scanned data.

Similarly, with the 3D reconstructed model of the human has the aim to be utilised to test different fashion clothing items. This has the intent to adjust the sizing of the clothes fittings based on the Scanned data. The clothing models will adjust automatically depending on the dimensions of the data of the scanned model.

1.3 Problem Definition

Being able to obtain data from multiple sensors and model objects has is very crucial for many industries. Nevertheless, there is a lack of precise and accurate options in the market that could create 3D models of Humans with respective sensor data. Similarly there are no current industry application that maximise the potential use of the Human body 3D models. Therefore, this project is aimed at creating a solution and develop the software for 3D data reconstruction of the scanned human. This model will be utilised to try different fashion items and adapt the size fittings accordingly.

The project will have different stages that range from testing different sensors for data acquision, testing different data stitching frameworks to the deployment of the software in the 3D scanner mechatronic device.

1.4 Background

The human society has the world comprenhension of the surrouding world through visual perception. This principle allows to differenciate distintive kinds of shapes, objects,colours, textures and the spatial pose of the surroudings. Based on this information, it is possible to analyse the number of objects in a determined location, object type, object size, object pose in different coordinate frames. Thus, it impacts how as a society we interactuate with objects ot scenes. As a result it is essential to imitate this perception in order to acquire real world data in different formats that include:

- RGB images

- Depth images

- 3D point clouds

- Multispectral images

- Laser readings

All these acquire data can be obtained from a wide variety of comercial or industrial sensors. With this data it will be possible to use computer processing techniques in order to model the object or scene (**?**).

1.5 Applications

In the recents years the use of 3D body scanners has gain importance in several industries. Within the fashion industry it can aid clothes manufactures to obtain accurate body measurement data of body dimensions. As mentioned by **?**, this new technological approach has the potential to alterate the future of the fashion and clothing manufacturing industry.

With the raise of innovatoin of 3D image reconstruction, the interest from to gather precise measurements of the human has raised. Due to the fact, that in the clothing industry is extremedely important to create better fittings for different shapes of human bodies. Furthermore, virtual try-on solutions has gain popularity in physical and online retail stores (**?**).

On the other side 3D scanners have gain in particupation in the medical industry. These systems are described as "non-invasive and low cost" , thus making it appealing for epidemiological surveys and clinical uses. (**?**) The geometrical measurements could be associated with shape,

size, volume and surface area of the body parts. It could aid to be a sustainable approach to screen children and patients with obesity, deformities or specific anatomic defects. Therefore, it will ease the diagnose process and allow to treat and monitor medical conditions holisticly and improve the life quality of patients with non-invasive tests. The table below illustrates the use of 3D scanner in the medical field with the purpose to identify and monitor various medical conditions. Frpm which the diagnose, treatment and monitor procedures willd differ based on the acquired data.

Application	Epidemiology	Diagnosis	Treatment	Monitoring
Measurement				
Size	Anthropometric surveys	Growth defects	Scoliosis	Fitness and diet
Shape	Screening	Abdominal shape	Prosthetics	Obesity
Surface area		Lung volume	Drug dosage	Diabetes
Volume			Burns	
Visualization				
Head		Melanomas	Eating disorders	
Chest			Facial reconstruction	
Whole body			Cosmetic surgery	

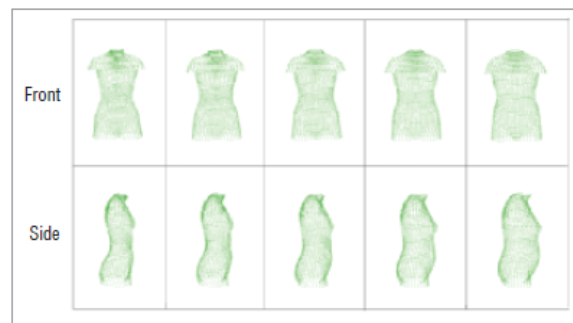**Table 1.1:** 3D Scanning Applications (**?**).

Figure 1.1: Front, Side results of 3D Scanning (**?**).

Related Works

Being able to scan different objects and subjects has been challeging task for researchers. Getting an accurate spatial location of the objects is crucial for this type of application. The use of 3D point clouds has facilitated this process as it allows to obtain the following parameters:

- Depth

- Intensity

- Pulse width

- Light echo

This information can be obtain with different kind of sensors. There is a wide variety of off the shelf sensors that can procide 3D point clouds. These sensors could either be stereo or multiview vision cameras, lasers, time-of-flight sensors (*TOF*) and structured light sensors as stated by **?**.

Many Scanning devices will use single or multiple of the above-mentioned sensors in order to acquire data. Once the data is obtained, it essential to have a framework for 3D data modelling and reconstruction. The principle behind 3D data recontruction is obtained with data fision from RGB-D sensors. This kind of sensors provide 3 channels images RGB (red,green, blue) and the depth images are mapped to each pixel. Based on this data 3D point clouds could be generated for data recontruction. One of the most common frameworks is known as **Dynamic Fusion** which is referenced to *"reconstruction and tracking of Non-rigid Scenes in real time"* (**?**). Another recent powerful 3D Data recontruction framwork is **SurfelWarp** which is defined as *"Efficient Non-Volumetic Single View Dynamic Reconstruction"* (**?**).

2.1 Dynamic Fusion

Dynamic fusion is the based on three different technologies focused on 3D scanning and data recontruction. These techniques are:

DART (Dense Articulated Real Time Tracking)
   This technology is speciaclised on Real Time body template skeleton tracking.

Animation Cartography
   It is a 3D reconstruction technique focused on intrinsic data reconstruction of shapes and motions.

Kinect Fusion
   This technology is applied for real-time tracking and condence surface mapping.It is intended to be used in static scenes and objects with only a moving camera sensor.

The principal focal point of the 3D data recontruction feature of *Dynamic Fusion* is that it will look for a solution for for the volumetric flow based on the gathered data. As mentioned by **?** there will be a transformation of the state ot the scene at each time interval to a fixed canonical frame. The created canonical frame is described as the initial frame that is obtained from the non-rigid object that has been detected and tracked.The shape of the

Figure 2.1: Transformation Between Depth Video to Warped canonical Model. (**?**)

detected object is defined as "canonical model" which is the correspoding shape of the object in the canonical frame. Therfore, the canonical model will be utilised as reference model for all the subsequent frames. From this approach there will be progressing adjustment on on the canonical model and frames, as more data is acquired. With the new refinements each point in the canonical frame, the point clouds will be transformed and updated to the new location in real time based on the received data.
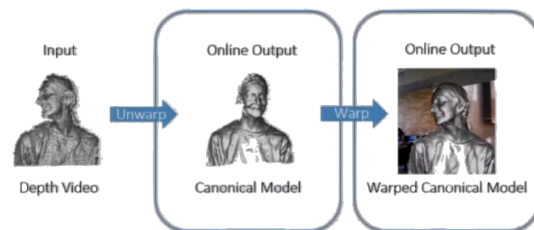
The data acquired from sensors that includes RGB and Depth images will help to determine the warp parameters. Based on the determined warp parameters the volumetric flow field can be estipulated. The state of the wrap field W_t is defined as a function of time. It is modelled by the values of a set of "*n*" deformation nodes, which are described as the points or pixels in the actual image. The image below describes the process in which the canonical model and frame are determined based on the initial frame and depth data.
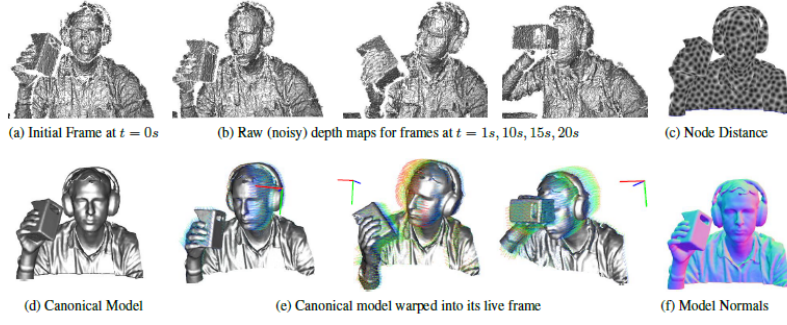
(a) Initial Frame at $t = 0s$ (b) Raw (noisy) depth maps for frames at $t = 1s, 10s, 15s, 20s$ (c) Node Distance

(d) Canonical Model   (e) Canonical model warped into its live frame   (f) Model Normals

Figure 2.2: Dynamic Fusion methodology (**?**)

The State of the warp field W_t can be modelled with the below equation.

$$N^t_{warp} = \{dg_v, dg_w, dg_{se3}\}t$$

dg_v: is described as the 3D position of each node in the canonical frame.

dg_{se3}: is the Special Euclidian transformation where $T_{ic} = dg^i_{se3}$ is the rigid transformation for every node i.

dg_w: It controls the extend impact of the deformation around each node.

The current set of point clouds will be stored as a "polygon mesh" with the normal pair of points within the canonical frame and allow to calculate the warp field parameters. The principle will allow effective surface reconstruction as suggested by **?** as once the warp field parameters are obtained, surface recontruction can be modelled with a principle of marching cubes. This process will be followed by a rasterization rendering pipeline of the Acquired Point cloud values (**?**).

The patterns from the figure 2.3 illustrate the triangulated cubes for the 15 basic patterns used in marching cubes for surface recontruction. These patterns are able to reconstruct all 256 possible solutions using rotational and complementary symmetry as suggested by **?**. Once the canonical model and frame can be modelled with the warp field parameters based from the intial raw depth image maos ad data frame, the tracking nodes will be created. Based on this it is possible to obtain the canonical frame warp parameters which are estimated based on this process. As soon as the canonical model is constructed, the life frame will be warp around it based on the warp parameters. As a result the model will be 3D reconstructed model will be succesfully created and normalized.
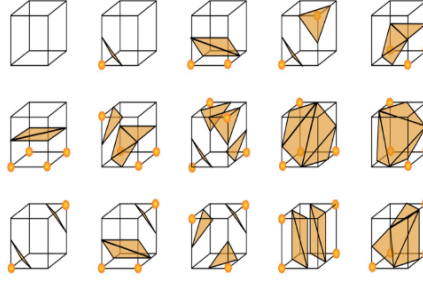
Figure 2.3: Triangulated patterns (**?**)

2.2 SurfelWarp

SurfelWarp is defined as "Efficient Non-Volumetric Single View Dynamic Reconstruction. It will present a standard graphics pipeline and GPGPU computing can be utilised for efficient implementation of all data recontruction operations (**?**). It eliminates the use of volumetric data structures, which represent resouce intensive volumetric operations such as dense deformation field updates, volumetric fusion and marching cubes. This represents a significant performance improvement as the explicit surfel representation allow to directly recover from tracknig failures or topology changes as proposed by **?**.

2.2.1 Overview

As illustrated in figure 2.4, SurfelWarp is built in a frame by frame methodology to process an input depth stream data source. When a new depth image is received, the deformation field that is aligned to the reference frame geometry will be solved. This is calculated by startting the deformation field from the previous image, which is followed by an iterative optimization problem similar to **?**. Once the deformation field is update, the data fusion process is carried out. This will trigger an accumulative process to fuse the current depth observations into a geometrical representation.

The deformation field $W = \{[p_j \in R^3, \sigma_j \in R^+, T_j \in SE(3)]\}$ where j is the node index, p_j is the position of the j^{th} node. σ_j is the radius parameter, T_j is the 6DoF transformation. For any point in "x" the deformation can be interpolated by equation 2.1
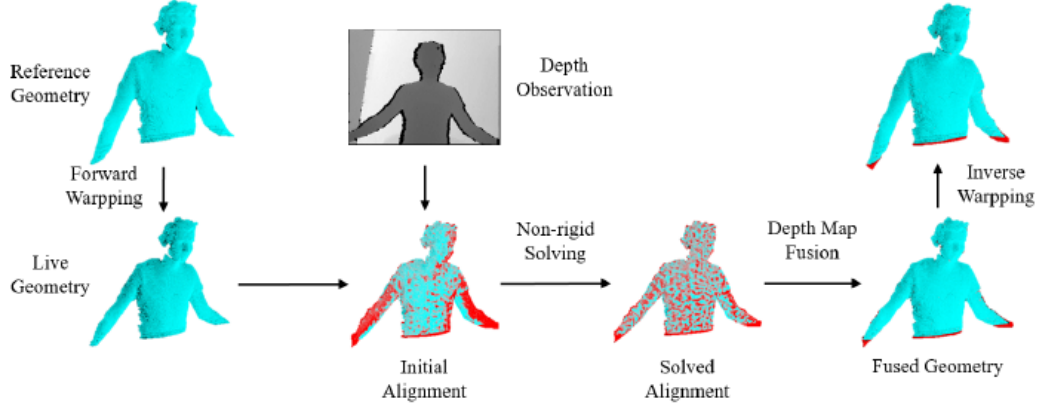
Figure 2.4: SurfelWarp methodology (**?**)

$$W(x) = normalized(\Sigma_{k \in N(x)} w_k(x) \hat{q}_k) \tag{2.1}$$

From equation 2.1 the following components can be described:

- $N(x)$: is the closest set of points x

- $W_k(x)$: is the weight that can be computed as $\exp\left(-\frac{|x - p_k|_2^2}{2\sigma_k^2}\right)$

A surfel S could is described as the tuple composed in which the following components can be modelled :

- position : $v \in R^3$

- normal : $n \in R^3$

- radius : $r \in R^+$

- confidence : $c \in R$

- initilization time : $t_{init} \in N$

- most recent time : $t_{observed} \in N$

Therefore a surfel can be illustratedby the deformatin of field W in equation 2.1 (**?**). Furthermore the deformed vertex position and normal can be modelled with the following equations:

$$v_{life} = W(v_{ref}) v_{ref} \tag{2.2}$$

$$n_{life} = rotation(W(v_{ref}) n_{ref}) \tag{2.3}$$

From equations 2.2 and 2.3 v_{life} and n_{life} are the deformed vertex position and normal. Whereas v_{ref} and n_{ref} correspond to the vertex position and normal before the deformation process.

2.2.2 Depth Map Fusion & Warp Fiel Update

In order to get the warp fiel estimate, it is neccesary to perform a mathematical prediction of the visibility of the live surfels models S_{life} with the proposed method of **?** to cast the deformation estimation into a optimization problem. The estimation process is performed by predicting the visibility of the life surfels S_{life}.
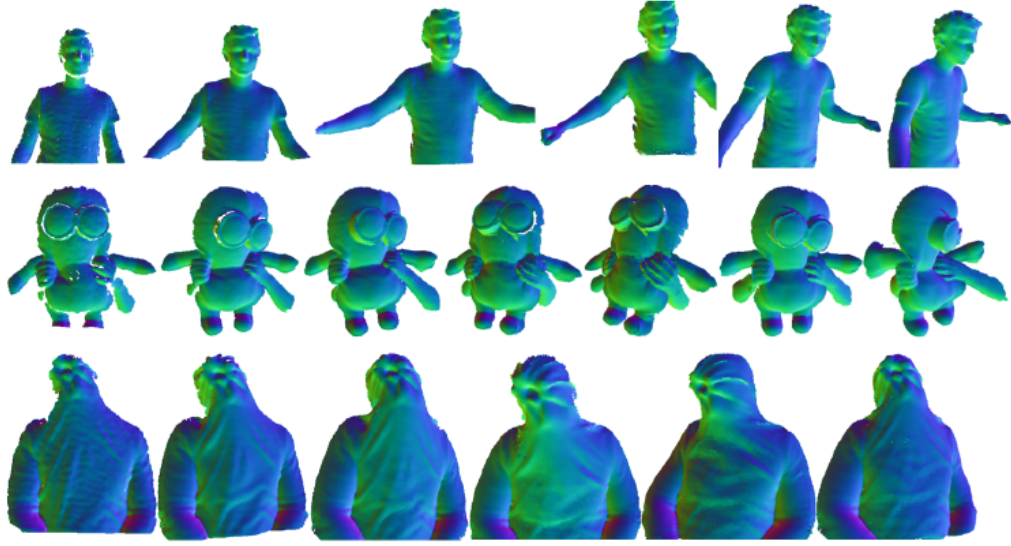

Figure 2.5: SurfelWarp Reconstruction(**?**)

Similarly, to the approach of **?** the life surfels S_{life} are rendered as an overlaped disk shaped surface splat. These shapes are spanned by the position V_{life} ,normal n_{life} and radius r_{life} of the live surfel s_{life}. With all these parameters it is possible to model the warp fiel based on the Dynamic Fusion framework proposed by **?**.

Once the deformation is solved, the depth map fusion obtained from sensors along with the warp field update will perform data fusion in the live frame. This live frame warps the live surfel back to the starting reference frame. Afterwards the warp field is recurrently updated based on the new observed surfels reference. This process can be exemplified with image 2.5 .

Methodology

As mentioned in the initial section, this project is focused on an engineering design. Hence, it will be focused on creating a prototype for a 3D scanner. This include the hardware and the software for the 3D model reconstruction, from which this section will be focused on the 3D model data reconstruction of the project. The methodology will be divided into 3 sections that include:

- Data Acquisition
- Conceptual Design
- Design Implementation

3.1   Data Acquisition

As mentioned above the project can be described as en engineering deging problem, whereby this approach includes the 3D software reconstruction model components for a 3D scanner. This includes in gathering sensor data from the model that will be scanned. Many of the possible ways to gather data can be perform with comercially availible sensors as proposed by **?**.

? mentions that many 3D software reconstruction frameworks similar to Dynamic or SurfelWarp use comercially availible sensors. One of the most common approach to get data for 3D scanning will be to use RGB-D cameras. The proposed sensor that will be used for data acquisition is the **"Intel RealSense D435i"**. This Sensor is an depth camera with a stereo solutoin which is used in a wide variety of applications which include:

- Robotics
- 3D Scanning
- Skeleton and Human Tracking

- Drones

- Objects Measurement

- Facial Auth

Therefore, making this camera ideal for this project application.

Figure 3.1: Intel RealSense D435i

This model of camera has a propietary software development library and SDK which is used to interactuate with the computer. This SDK will allow to calibrate the camera and obtain certain calibration parameters that will be used for data acquision. Furthermore there is a software wrapper that will allow to connect with ROS (Robot Operating System). This ros wrapper will allow to interaction between the middleware, which is ROS, the camera and the compouter. With aid of this wrapper it is possible to integrate all the components of ROS and the camera. One of the benefits of using ROS is that it allows to record certain set of data based on the information that is being acquired by the sensor. The wrapper will start the camera based on different configuration and it will publish data both RGB and depth images in the following topics:

- /camera/color/camera_info

- /camera/color/image_raw

- /camera/depth/camera_info

- /camera/depth/image_rect_raw

- /camera/extrinsics/depth_to_color

- /camera/extrinsics/depth_to_infra1

- /camera/extrinsics/depth_to_infra2

- /camera/infra1/camera_info

- /camera/infra1/image_rect_raw

- /camera/infra2/camera_info

- /camera/infra2/image_rect_raw

- /camera/gyro/imu_info

- /camera/gyro/sample

- /camera/accel/imu_info

- /camera/accel/sample

- /diagnostics

The above topics will contain all the data that the sensors perceive in real time. As it can be seen from the above list, there will be data for the RGB, Depth sensors, Infrared sensors, IMU as well as all the extrinsics and status of the camera parameters. Furthermore, all this data will be process with different formats such as raw or compressed. Based on the data perceived from these topics, it will be possible to create 3D point clouds in realtime and run 3D data reconstruction frameworks such as Surfelwarp as the sensors acquire and perceive the environment.

On the other side, ROS allows to record data from the above topics. From the above topics it is possible to record the data messages as a "rosbag" or "bag", which is a file format in ROS for storing message data. Hence it will allow to record the data that the camera is sensing. Furthermore, these bags allow to susbcribe to specific topics, which implied that only the required topics will be stored for 3D data recontruction, and storing the received messages data in an efficient file structure. The data acquisition process for the development phase will be perform by storing several rosbags, to be used in the development phase of the 3D recontruction for the sca

3.2 Conceptual Design

3.3 Design Implementation

Project Management

Progress Statement

Appendices

Bibliography

Daanen, H. A. & Psikuta, A. (2018), '3d body scanning', *Automation in Garment Manufacturing* pp. 237–252.

Digumarti, S. T., Chaurasia, G., Taneja, A., Siegwart, R., Thomas, A. & Beardsley, P. (2016), Underwater 3d capture using a low-cost commercial depth camera, *in* '2016 IEEE Winter Conference on Applications of Computer Vision (WACV)', pp. 1–9.

Fang, Z., Zhao, S., Wen, S. & Zhang, Y. (2018), 'A real-time 3d perception and reconstruction system based on a 2d laser scanner', *Journal of Sensors* **2018**, 1–14.

Gao, W. & Tedrake, R. (2019), 'Surfelwarp: Efficient non-volumetric single view dynamic reconstruction', *CoRR* **abs/1904.13073**.
URL: *http://arxiv.org/abs/1904.13073*

Gautier, Q., Garrison, T., Rushton, F., Bouck, N., Lo, E., Tueller, P., Schurgers, C. & Kastner, R. (2020), 'Low-cost 3d scanning systems for cultural heritage documentation', *Journal of Cultural Heritage Management and Sustainable Development* **ahead-of-print**.

Gonzalez-Rodriguez, A. (2020), 'Growing pains of ill-sized clothing for both consumers and brands'.
URL: *https://fashionunited.uk/news/business/the-growing-pain-of-ill-sized-clothes-for-both-consumers-and-brands/2020010146825*

Intel (2020), 'depth camera d435i intel realsense depth and tracking cameras$_2020'$.
URL:*https://www.intelrealsense.com/depth-camera-d435i*

Jo, W., Kannan, S. S., Cha, G.-E., Lee, A. & Min, B.-C. (2020), 'Rosbag-based multimodal affective dataset for emotional and cognitive states'.

Keller, M., Lefloch, D., Lambers, M., Izadi, S., Weyrich, T. & Kolb, A. (2013), Real-time 3d reconstruction in dynamic scenes using point-based fusion, p. 8.

Magnenat-Thalmann, N., Seo, H. & Cordier, F. (2004), 'Automatic modeling of virtual humans and body clothing', *Journal of Computer Science and Technology* **19**(5), 575–584.

Murcia, H., Monroy, M. F. & Mora, L. F. (2018), *3D Scene Reconstruction Based on a 2D Moving LiDAR.*

Newcombe, R. A., Fox, D. & Seitz, S. M. (2015), 'Dynamicfusion: Reconstruction and tracking of non-rigid scenes in real-time', *2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)* .

Siena, F., Byrom, B., Watts, P. & Breedon, P. (2018*a*), 'Utilising the intel realsense camera for measuring health outcomes in clinical research', *Journal of Medical Systems* **42**.

Siena, F., Byrom, B., Watts, P. & Breedon, P. (2018*b*), 'Utilising the intel realsense camera for measuring health outcomes in clinical research', *Journal of Medical Systems* **42**.

Slavcheva, M., Baust, M. & Ilic, S. (2018), 'Sobolevfusion: 3d reconstruction of scenes undergoing free non-rigid motion', *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition* .

Spahiu, T., Shehi, E. & Piperi, E. (2014), *Extracting body dimensions from 3D body scanning.*

Sturm, J., Bylow, E., Kahl, F. & Cremers, D. (2013), 'Copyme3d: Scanning and printing persons in 3d', *Lecture Notes in Computer Science* pp. 405–414.

Treleaven, P. & Wells, J. (2007), '3d body scanning and healthcare applications', *Computer* **40**(7), 28–34.