

Assembly			
Part Number	Description	Weight	
		Lbs.	Kgs.
34015001000	AW Hoisting plug Assy complete	10.60	4.80



Swivel eye
34015001005



Head W/ bushing
34015001015



Bearing
34015001020



Support washer
34015001025



Lock nut
34015001030



Cotter pin
42013003035



Body AW box thread
34015001010



Adapter (Optional)
(See chart)

ADAPTER SUB	
AW Rod pin to AW/L pin	34030400404
AW Rod pin to BW/L pin	34030400504
AW Rod pin to NW/L pin	34030400604
AW Rod pin to HW/L pin	34030400704
AW Rod pin to HWT Casing pin	34030400707
AW Rod pin to HW Casing pin	34030400711

Another sizes upon request

Assembly			
Part Number	Description	Weight	
		Lbs.	Kgs.
34015002000	NW Hoisting plug Assy	16.70	7.60



Swivel eye
34015002005



Upper bearing
34015002025



Head
34015002015



Lower bearing
34015002030



Bearing washer support
34015002020



Lock nut
34015002035



Cotter pin
34015002040




Body NW box thread
34015002010



Adapter (Optional)
(See chart)

ADAPTER SUB	
NW Rod pin to BW/L pin	34030600504
NW Rod pin to NW/L pin	34030600604
NW Rod pin to HW/L pin	34030600704
NW Rod pin to HWT Casing pin	34030600707
NW Rod pin to HW Casing pin	34030600711

Another sizes upon request

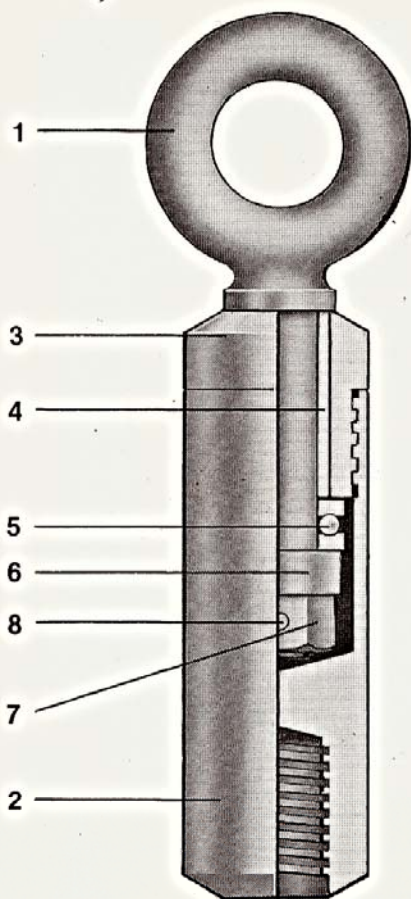


AW Hoisting Plug

The AW hoisting plug has a maximum allowable lifting capacity of 10,100 lbs. This ball bearing plug is standard with AW box thread and can be adapted to various sizes of rod and casing by using reducing subs.*

ITEM NO.	DESCRIPTION	PART NUMBER	NET WT (LBS.) APPROX
	Complete Assembly	27-016-176S	11.0
1	Swivel Eye	27-016-175S	2.5
2	Body w/ AW Box Thread	27-016-185S	3.6
3	Head w/ Bushing	27-016-186S	2.0
4	Head Bushing	27-016-647S	
5	Bearing, Aetna G-8	27-019-163S	
6	Bearing Support Plate	27-016-190S	
7	Castle Nut, 7/8-14NF	6-015-689S	
8	Cotter Pin, .125" x 1.25"	6-019-715S	

* See Subs Catalog

Overall length: 12-3/4", Eyebolt ID: 2-1/2"

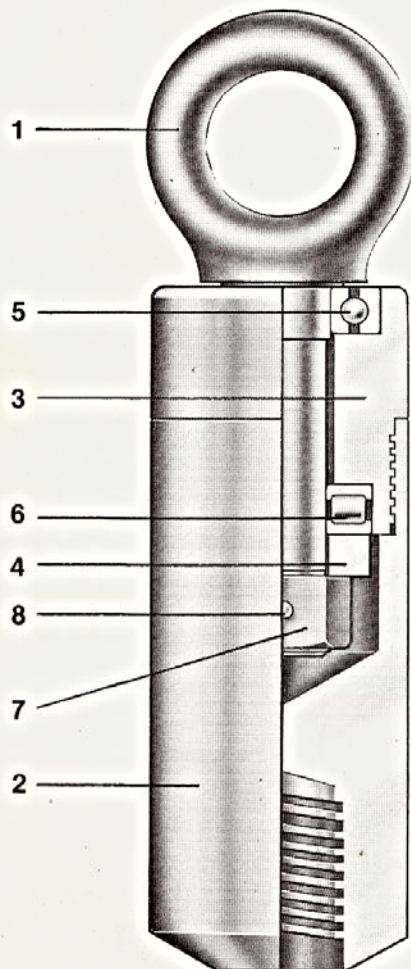

NW Heavy-Duty Hoisting Plug

The Christensen heavy-duty hoisting plug has a maximum allowable capacity of 21,500 lbs. The plug itself is a swivel connection with a double ball bearing and is used to connect the hoisting cable to the drill rod string. NW box thread is standard, however, by using various rod reducing subs increased versatility may be obtained.*

ITEM NO.	DESCRIPTION	PART NUMBER	NET WT (LBS.) APPROX
	Complete Assembly	27-016-177S	30.0
1	Swivel Eye	27-016-178S	4.0
2	Body w/ NW Box Thread	27-016-187S	10.5
3	Head	27-016-188S	5.0
4	Bearing Support Plate	27-016-189S	
5	Bearing, Fafnir 207-NPP	27-019-214S	
6	Bearing, Timkin T-127	27-019-101S	
7	Castle Nut, 1-1/4-12NF	6-015-697S	
8	Cotter Pin, .188" x 1.75"	6-019-723S	

* See Subs Catalog

Overall length: 16-5/8", Eyebolt ID: 3"