



TS 13-010 EN

MININGPRODUCTS
DIAMANTINA CHRISTENSEN TECHNOLOGIES



ACCESSORIES

DIAMOND LOCKING COUPLING




OVERVIEW

The Locking Coupling are made out of high quality alloy steel with a Hard-faced Latch resisting area for better latching reliability.

The Tang is a tab of steel located on the pin end of the locking coupling. The tang acts as a physical stop against the core barrel head latches to ensure the core barrel head rotates with the rod string, eliminating latch wear against the locking coupling.

TECHNICAL SPECS

Overview

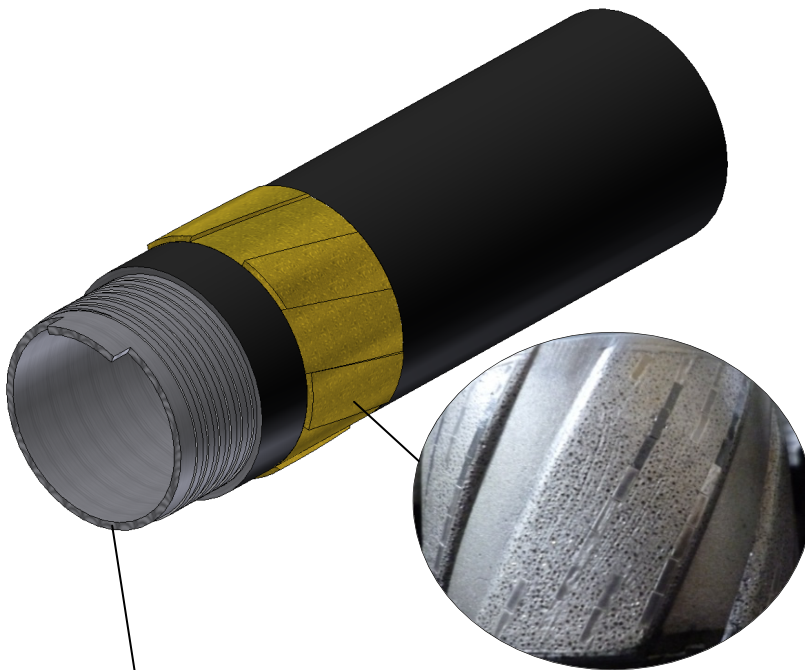

Hard-Faced Area

- Hard-Faced Area Latch resisting for better latching reliability

Diamond Impregnated Surface

- Extended diamond impregnated ring of precision.
- Designed with spiral pads for proper detritus evacuation.
- Manufactured with high quality diamond particles embedded in matrix to prevent abrasion wear.
- Best suited for non-fractured and very hard ground conditions.

Codes

Size	Code
BO W/L	5814998200100
NO W/L	5815998200200
HO W/L	5816998200300
PO W/L (HWT BOX)	5817998201400