


How to make the cutting file

Please look at the design file:(The red line is the cutting line.)



1. When designing the print image, two black marks are designed together.

The red line is the cutting line.



So,delete the cutting line, Save the printed file, and then to print.




2. Delete the printed file, but you must keep two black marks.(**But the cutting file must have two black marks**)




3. Rotate 90 degrees. (**The two black marks must on the left.**)



4. Export the cutting line as PLT format:(The Plotter unit is 1013, The curve resolution is 0.)

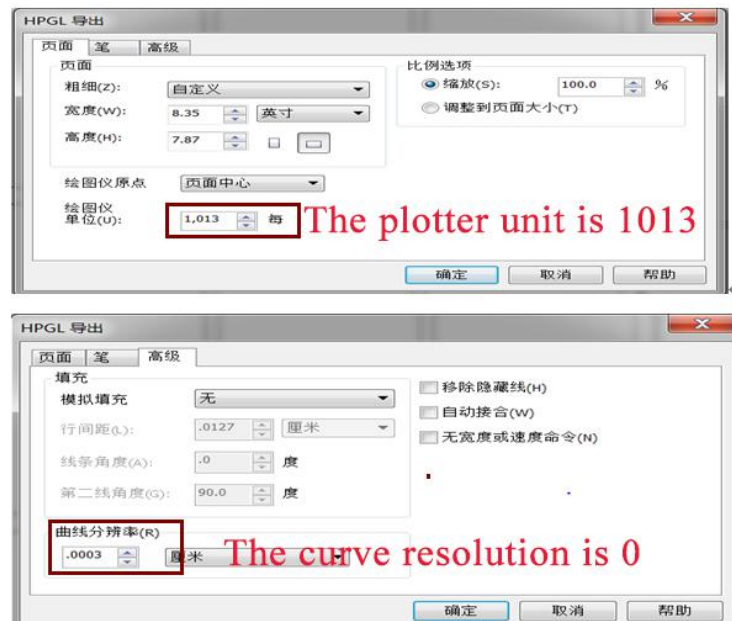

5. Open the cutting file with our software:

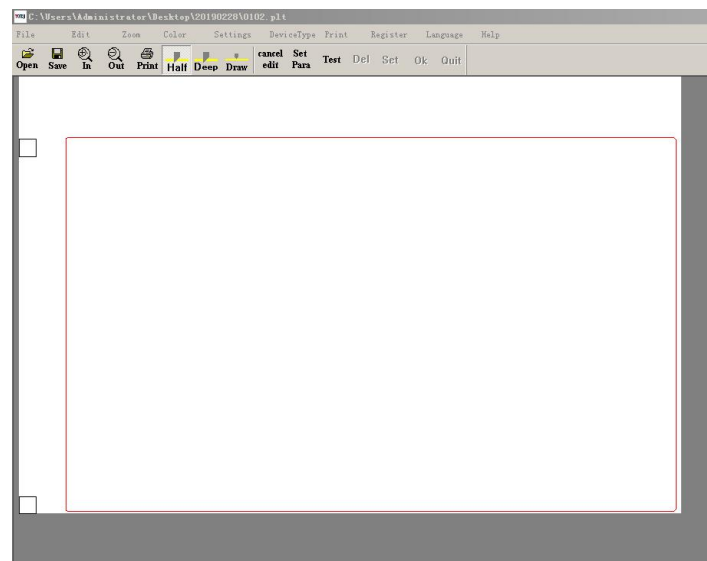

Note:In our software :two black marks must on the left.**But the cutting file must have two black marks !**So there is only one registration point, the machine will make a mistake. Only with two registration points ,the cutting machine will know how to start working.