


4X 1/4-20 UNC-2B THRU
2X #10-32 UNE-2B .38 DEEP

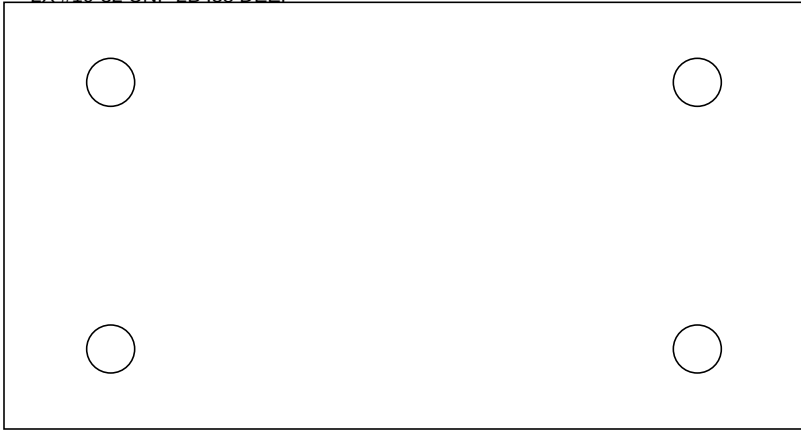

Ø.250 ±.002
3.000 ±.005

NOTES: UNLESS OTHERWISE SPECIFIED

1. INTERPRET DRAWING PER ASME Y14.5-2018.
2. REMOVE ALL BURRS AND BREAK SHARP EDGES .005-.015.
3. ALL MACHINED SURFACES 125 Ra MAX.
4. MATERIAL CERTIFICATIONS REQUIRED. MATERIAL SHALL BE TRACEABLE TO THE MILL HEAT LOT.
5. FIRST ARTICLE INSPECTION REQUIRED PER AS9102.
6. MARK PART NUMBER AND REV PER MIL-STD-130, .12 HIGH CHARACTERS.
7. FINISH: ANODIZE PER MIL-PRF-8625, TYPE II, CLASS 2, BLACK.

DISTRIBUTION STATEMENT D. Distribution authorized to the Department of Defense and U.S. DoD contractors only.
WARNING - This document contains technical data whose export is restricted by the Arms Export Control Act
(Title 22, U.S.C., Sec 2751, et seq.). Violations of these export laws are subject to severe criminal penalties.

REV DESCRIPTION DATE APPROVED
A INITIAL RELEASE 2024-03-01 JD
B ADDED TAPPED HOLES 2025-01-15 JD

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES: .XX ±.01 .XXX ±.005 ANGLES ±0.5°
MATERIAL: ALUMINUM ALLOY 6061-T6 PER ASTM B209
TITLE: BRACKET, MOUNTING
SIZE CAGE CODE DWG NO REV
C 1ABC5 12345-001 B
SCALE 1:1 SHEET 1 OF 1