


Ø.7500 ±.0005

3/8-24 UNF-2A

M6x1.0-6H 2 PLACES

2X HELICOIL INSERT MS21209F1-15 (1/4-20 UNC-2B STI)

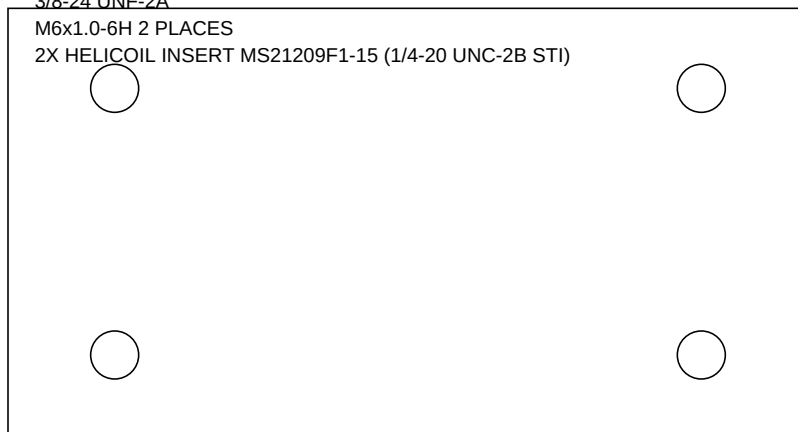

NOTES:

1. MATL: CRES 304 PER ASTM A276 COND A.
 2. HEAT TREAT: NONE. STRESS RELIEVE AFTER ROUGH MACHINING.
 3. PASSIVATE PER AMS 2700.
 4. SURFACE FINISH 32 Ra ON BEARING DIAMETERS.
 5. DO NOT PAINT.
- DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

PART NO: 8842-17
DWG NO. 8842
CAGE CODE: 3XY77
REV C
TITLE: SHAFT, DRIVE
TOLERANCES UNLESS NOTED .XXX ±.005