CIFAR-10 DiT · broadcast conditioning pilot

10,000 optimizer steps · seed 42 · class + timestep · common AdaLN-Zero-style blocks

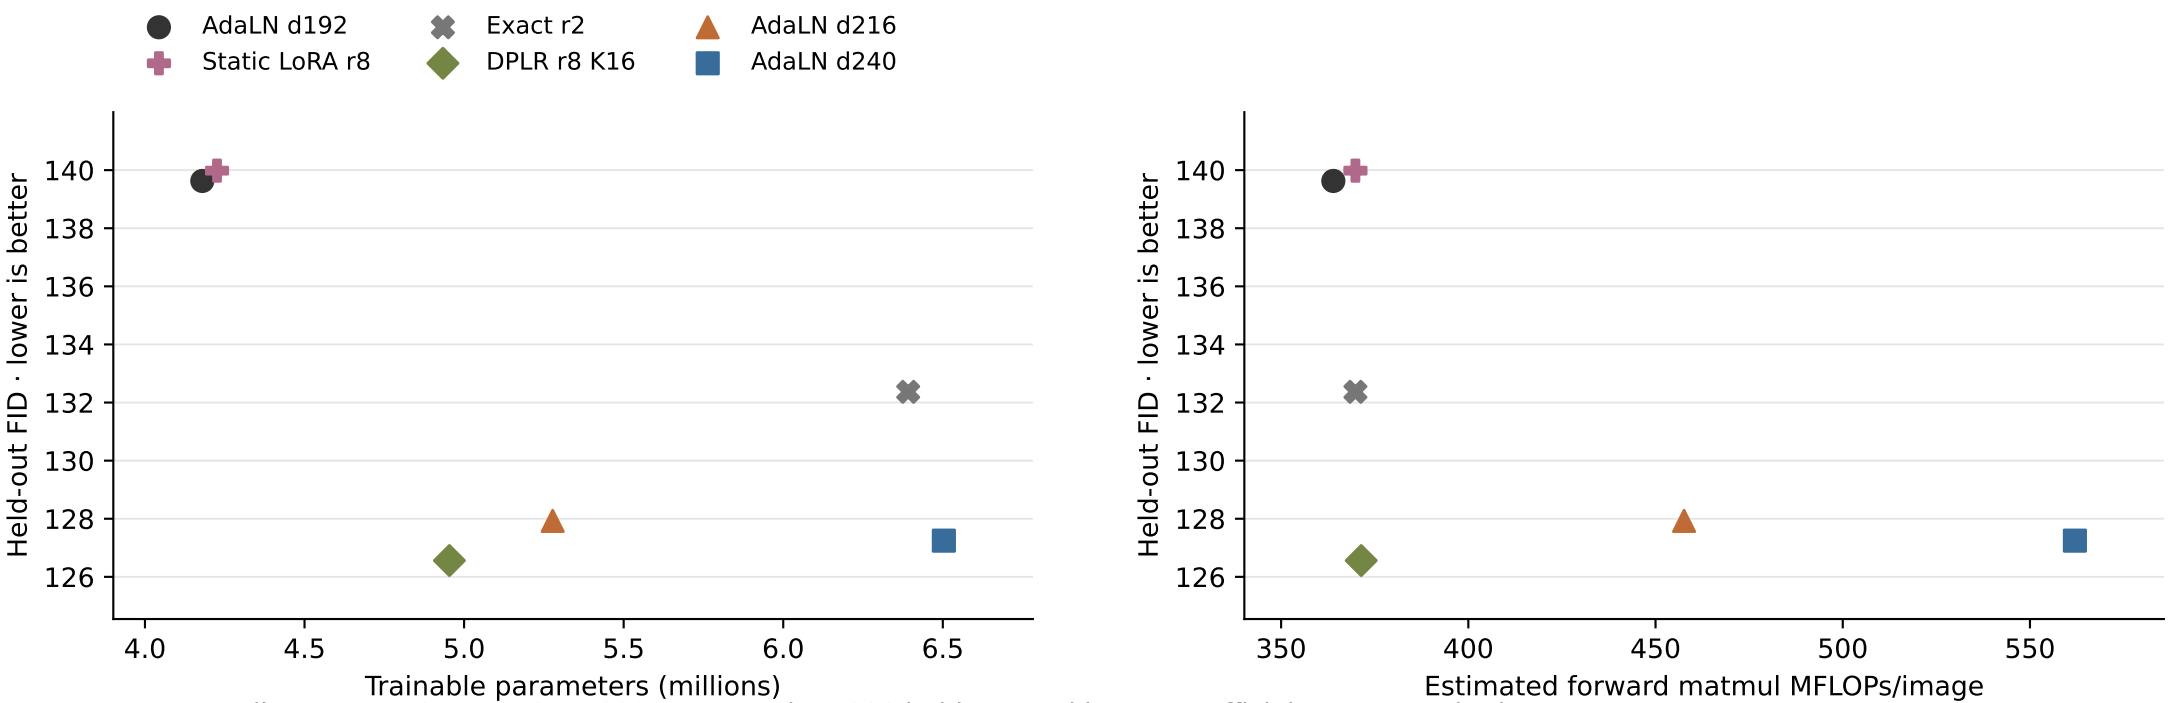

EMA sampling: DDIM 50, no CFG · 5,000 generated / 5,000 held-out real images · official test untouched

One run per model; no uncertainty estimate. FID is not directly comparable to published 50k-image evaluations.

FLOPs exclude elementwise work, normalization and backward. Width controls approximate parameter budgets.