

WIRELESS SERVICE ACCOUNTING BASED ON ETHEREUM STATE CHANNELS - MASTER THESIS

A. EGIO, L. GONZÁLEZ, A. PARDO, T. ROMERO

ABSTRACT. This document contains authors' "*Blockchain technologies master*"¹ final thesis.

The project described in the document consists on a technological proof of concept of an internet access service consumption using a state channel smart contract as mean of payment. After a brief introduction, there's a first motivation of the use case included; in the following sections there's a detailed explanation of the architecture, implementation and security considerations; after that it is described a more general approach about using blockchain technologies and state channels in particular to provide mechanisms to reduce advanced wireless (i. e. 5G) services market friction between neutral host providers, virtual operators and operators purchasing licenses of spectrum bands to nations' governments; guarantee transparency to consumers, and provide a fully GDPR compliant schema relying on a self-sovereign identity system.

CONTENTS

1. Introduction	2
2. Technological background	2
3. Proof of Concept description	3
3.1. Architecture	3
3.2. General work-flow	3
3.3. Detailed software description	4
4. Quality considerations	4
5. Deployment	4
6. Further steps	4
6.1. 5G Technologies and scarcity model	4
6.2. Know your customer issue	5
6.3. Instant portability	7
6.4. Towards telco market full tokenization	8
6.5. Regulation considerations	9
7. Conclusions	9
7.1. Usar Docker Swarm	10
8. Repositorio	10
References	10

1. INTRODUCTION

As exposed in [1] although radio spectrum “is often referred to as a ‘scarce resource’” there are spectrum management strategies being researched to improve and support a brand new model of services into the market; in particular there are multiple 5G[2] innovative projects and initiatives that try to solve this using Software Defined Network[3] and Network Function Virtualization[4].

Since spectrum is a scarce resource, it can be tokenized being suited this way for blockchain/DLT technologies business models; in addition, since atmospheric spectrum can be considered a public asset, it’s managed at the end by nations’ governments and its licensing and management should feature a high level of transparency and at the same time allow for efficiency and fair-competition making it feasible to model on public blockchain systems.

Taking this into account, lead the authors’ to develop a first bottom-up proof of concept of a simple system demonstrating how can a wireless WiFi hotspot deployed on a commodity hardware asset[22] be managed to allow users to access the internet paying in exchange for Ethereum on a public network.

One of the first initiatives to create a bandwidth reselling market was La Fonera[5] back in 2006. Main goal of the initiative was to allow ADSL users to share unused bandwidth using a specific WiFi hotspot deployed on an ad-hoc built router.



Figure 1. *La Fonera’s initial project router.*

A more recent project like Hotspot Me[6] and also very aligned with the technological demonstration described in this document

consist on using mobile APIs to allow a users to share WiFi hotspot tethering to users nearby in exchange for ETH supported by a micro-payment channel contract.

2. TECHNOLOGICAL BACKGROUND

Blockchain technologies support a ledger of records in continuous growth called blocks. They are linked and secured by cryptography. Adopt the P2P protocol (*peer-to-peer*) in order to be distributed with not a single point of failure.

The consensus mechanism ensures a common order of unambiguous transactions and blocks, and guarantees integrity and blockchain consistency a through geographically distributed nodes. By its design, the blockchain has characteristics such as: decentralization, integrity and auditability. The blockchain can serve as a new type of software connector, which should be considered as a possible decentralized alternative to storage of existing centralized shared data.

In addition, depending on the different levels of access permission, block chains can split into two types: 1) public (such as Bitcoin and Ethereum); Y 2) private (such as Hyperledger). Blockchain serves as a platform for smart contracts (hereinafter, textit smart contracts). For example, programmed in the Solidity language of Ethereum, stay and run. Blockchain is a technology concept DLT distributed ledger (textit distributed ledger technology). It can be integrated into multiple business areas.

Ethereum blockchain is proposed as a first optimal candidate platform to support this project PoC attending to following reasons:

- Is the most used and mature turing-complete-programmable blockchain technology.
- Support for high quality and audited libraries in Solidity (most used smart contract language in Ethereum).
- Developments on Ethereum can be deployed over public (main or testnets) or private/permissioned networks.

- Unlike Bitcoin, Ethereum supports miner fees using gas instead of directly ETH; this can mitigate the effects of volatile crypto-currency price by adjusting gas price depending on ETH value.

3. PROOF OF CONCEPT DESCRIPTION

3.1. Architecture. In order to support the PoC a Raspberry Pi 3 Model B (see figure 2) has been used as a single board computer to host all the required software. Tested operative system was OSMC[10] (a Debian based GNU-Linux flavor) mainly used as media-center. A WiFi access point using hostapd[7] daemon over Raspberry's WiFi chipset. Raspberry Pi was also connected using ethernet cable to an optical fiber commercial router (*see figure 2*).

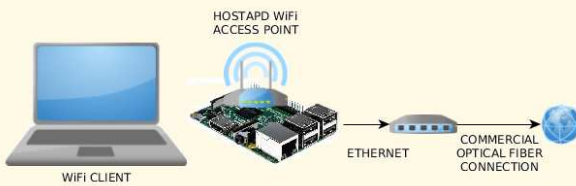


Figure 2. Physical Setup.

Specs	Raspberry Pi 3 Model B
CPU	Broadcom BCM2837, Cortex-A53 (ARMv8) 64-bit SoC @ 1,2 GHz
RAM	1 GB
Connectivity	Wi-Fi 802.11 b/g/n (2,4 GHz) Bluetooth 4.1 Ethernet card up to 100 Mbps
Ports	Full HDMI, 4 USB 2.0, MicroSD, CSI camera, DSI display
Memory	MicroSD

Table 1. Raspberry Pi 3 Model B specs Although it is not expressly indicated if it is free hardware (*open hardware*) or with trademark rights, on the official website there's an explanation regarding that Raspberry have distribution and sales contracts with two companies and guarantee that anyone can become a reseller or redistributor of Raspberry Pi cards [RaspberryPiBuy 19].

Dnsmasq[9] was used as dynamic host configuration server for the wireless network users and iptables[8] was used as a firewall running both inside the Raspberry; by default, iptables was configured to drop all packet forwarding traffic from users connected to the wireless domain and at the same time to redirect all traffic to Raspberry's HTTP port where a captive portal was listening incoming connections.

3.2. General work-flow. Main idea is that the users can join freely to the wireless hotspot and access the web captive portal (*hosted on the same Raspberry*) application that communicates with a back-end that controls iptables rules and also an Infura light proxy able to relay RPC calls arriving on 8545 port of the Raspberry.

The connection flow as shown in figure 3, can be summarized as follows:

- 1) The user associates the laptop with the WiFi hotspot.
- 2) Once connected is redirected to the captive portal front-end.
- 3) Front provisions MetaMask as Web3 provider.
- 4) Front-end uses MetaMask to allow the user to send value to the contract opening a *state channel* (*see section below*).
- 5-6) Signed transaction is relayed through a light Infura proxy listening on port 8545.
- 7) Once transaction is confirmed, the back-end iptables controller start forwarding user's traffic.

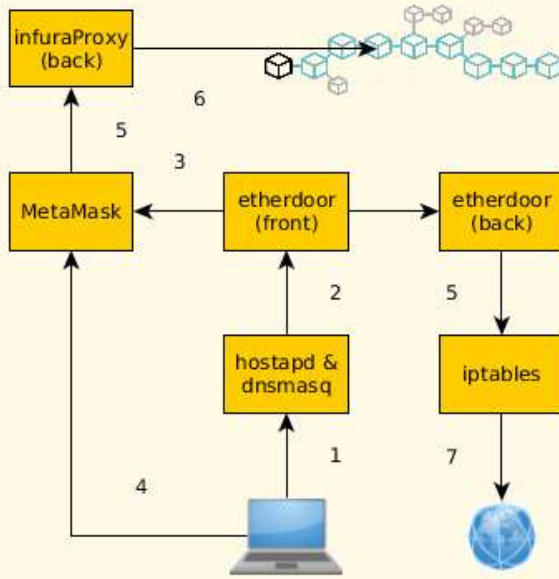


Figure 3. Connection work-flow.



Figure 4. Raspberry Pi 3 Model B.

3.3. Detailed software description. This section includes a detailed rationale software description of all the components and sub-components.

4. QUALITY CONSIDERATIONS

To validate the PoC, a battery of tests has been defined. For example, given that smart contract normally handle money, it is essential to ensure that its number of failures and vulnerabilities is low [Hegedus 18]. To help developers and make technology more mature, we need analysis tools [ConsenSys 19].

For this project, we used Mythril from ConsenSys. Mythril is a security analysis tool for EVM (Ethereum Virtual Machine) bytecode. It detects security vulnerabilities in smart contracts built for Ethereum.

We analysed the Solidity-based smart contract called StateChannel.sol (of this project).

The installation steps are as follows in:

<https://github.com/ethereum-internet-access/mythril> Firstly, we analysed the local source code:

```
$ cd contracts
$ myth analyze StateChannel.sol \
  > ./security-report
$ cat ./security-report
```

Secondly, we analysed on-chain smart contract. Because the smart contract was deployed on Ropsten testnet we executed:

```
$ myth analyze --rpc \
  infura-ropsten -a \
  contract_address \
  > ./security-report
$ cat ./security-report
```

5. DEPLOYMENT

Docker is a tool that allows you to deploy applications inside of software containers. This can be useful for our Raspberry Pi because it allows users to run applications with very little overhead, as long as the application is packaged inside of a Docker image.

We simply install Docker and run the container over Raspbian/ARM. It would deploy the done project. The script to execute is as follows:

```
$ sudo apt-get update
$ sudo apt-get upgrade
$ sudo apt-get install curl
$ curl -sSL https://get.docker.com | sh
$ sudo apt-get install git
$ git clone \
  https://github.com/ \
  ethereum-internet-access/docker.git
$ cd docker
$ sh ./install-project\
  -inside-docker-container.sh
```

6. FURTHER STEPS

6.1. 5G Technologies and scarcity model.

In the recent years blockchain technologies and in particular smart contracts have made possible an innovative way to rule business and processes between organizations.

One of the main application of smart contracts consist on modeling a scarce resource representing it using fungible (or not) tokens; in addition to this, smart contracts can be programmed to suit any possible business intelligence according to rules well known and accepted in advance by the parties transacting.

In the case of 5G technologies for practical reasons and the high density of antennas required, different operators shall be able to dynamically share the same resources (i.e. neutral host infrastructure). At the same time in

order to manage service operation efficiently through its whole life-cycle there's the need to automate as much as possible all the operations; this requirements perfectly fit smart contract capabilities, in order to model and operate over a defined set of rules supporting payments, escrows, rewards or penalties depending on different conditions.

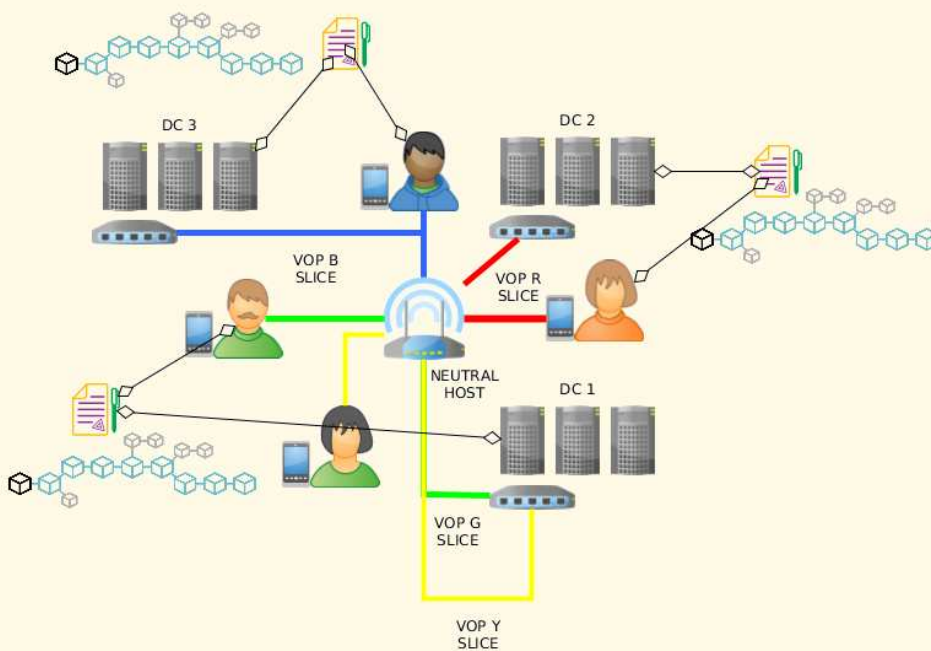


Figure 5. Slicing model.

As an example, in figure 5 it's shown how three virtual operators over different infrastructures shared or not in a slice-model of a neutral host infrastructure; a slice can be described as a dynamic virtualization allowing multitenancy of some physical resources like access points, physical switches and datacenters including mobile edge computing appliances; this is the case of currently in execution projects like 5GCity[11] where a distributed cloud and radio platform for municipalities and infrastructure owners acting as 5G neutral hosts is being developed and tested. Platforms targeting 5G business models such as 5GCity can benefit from adding this smart contract business logic in order to

bill end-users and automate all the accounting part.

6.2. Know your customer issue. Although this is a promising approach; there's an issue with it regarding regulation, in particular in the European Union, there's the requirement that a telecommunication service provider must know their customers; this is required for example to allow judge requirements of users identity in case there's some evidence of illegal activities. As a single payment system, state channel smart contracts are pseudoanonymous hence do not support the *Know Your Customer - KyC* required by regulation.

To take into account the problem illustrated in previous paragraph we can take as a basis a model of self-sovereign identity[12] and in particular the one recently announced by the authorities of Catalonia government[13] that will provide credentials to citizens using DLT technologies as a Public Key Infrastructure;

this model could allow in some near future to give the citizen the option of registering identity in such a way that the credential can be linked to some administration database that could be queried only by a judge requirement and guarantee the users identities are recognized

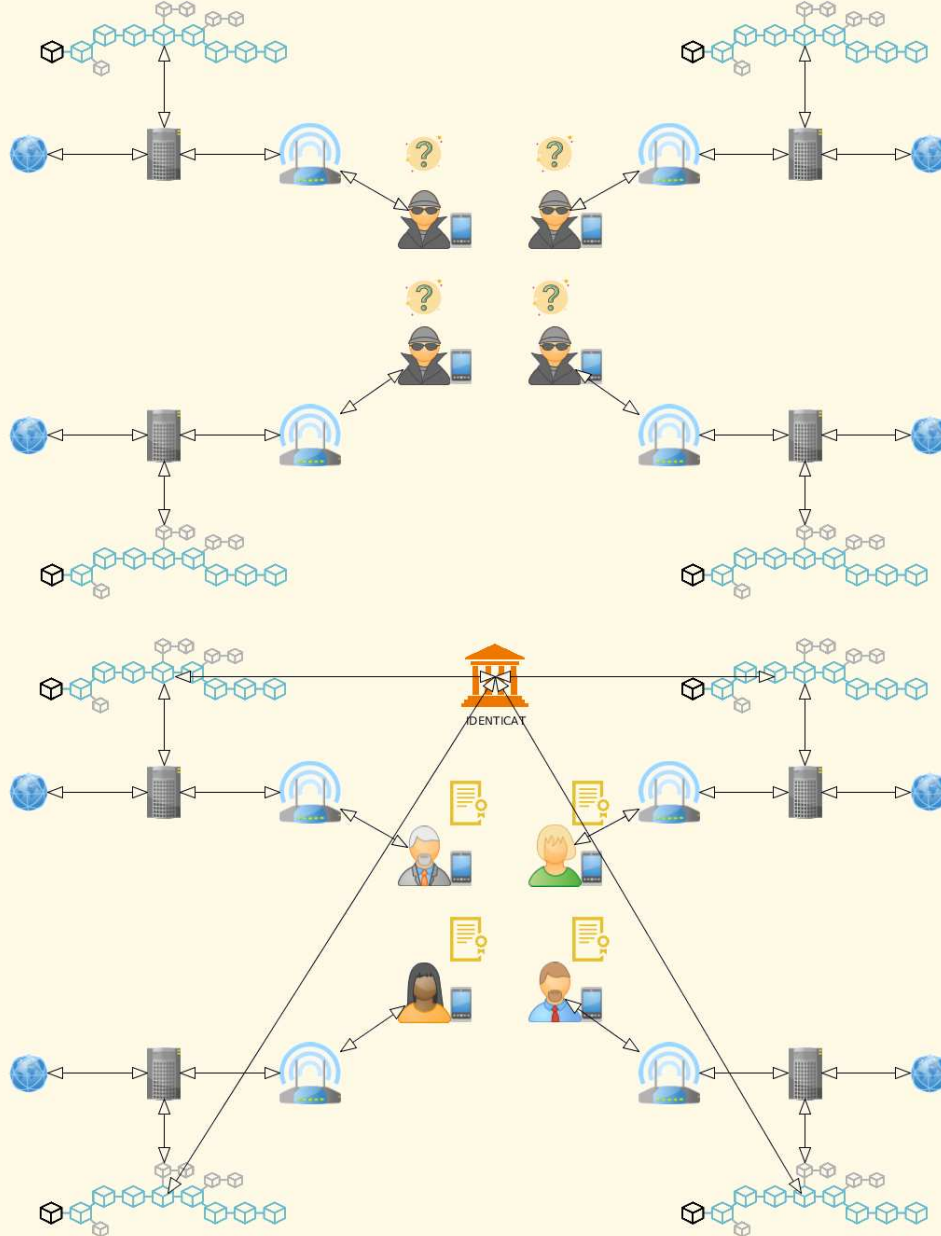


Figure 6. Upper figure shows a scenario where different users connect to antennas controlled by a state channel smart contract like the one described in this thesis; users remain pseudoanonymous and hence, the schema is not regulation compliant regarding the KyC that a telecommunications operator should guarantee in case of legal issues. On the other hand, relying on a self-sovereign decentralized identity bottom figure shows up how the citizens can authenticate themselves to the system with the guarantee there's a public administration validating their identities.

by a public administration; this way, the service provider (*in our case a telecommunications operator*) does not need to know anything about a customer apart from a public key and a valid credential signed by the administration. This schema could be a real game changer regarding operators competitiveness since they get rid-off from several and costly processes that do not add any value to the service they provide:

- Fully automated accounting and billing layer.
- Regulation compliance without KYC on-boarding process.
- GDP compliance by default. Operator does not need to know user's name, bank account, etc.

6.3. Instant portability. This approach to the way customers interact with telecommunication operators relying on a publicly recognized self-sovereign identity can support a

new way of handling portability granting full customer empowerment when they want to switch from one operator to another; in figure 5, is represented a process on a user opens a channel in operator's A smart-contract; after that begins transacting with this first operator paying as they consume the access service sending micro-payments to the operator.

After that, user decides to switch to a second operator, opening a channel over operator B's contract; since operator B, stops receiving the signed micropayments, opts for closing the channel backdrawing the earnings in operator's account and return value for the user. Such kind of process can be accomplished in a matter of seconds for a few cents fee literally obliterating any operator lock-in mechanism thus supporting a really zero friction service market.

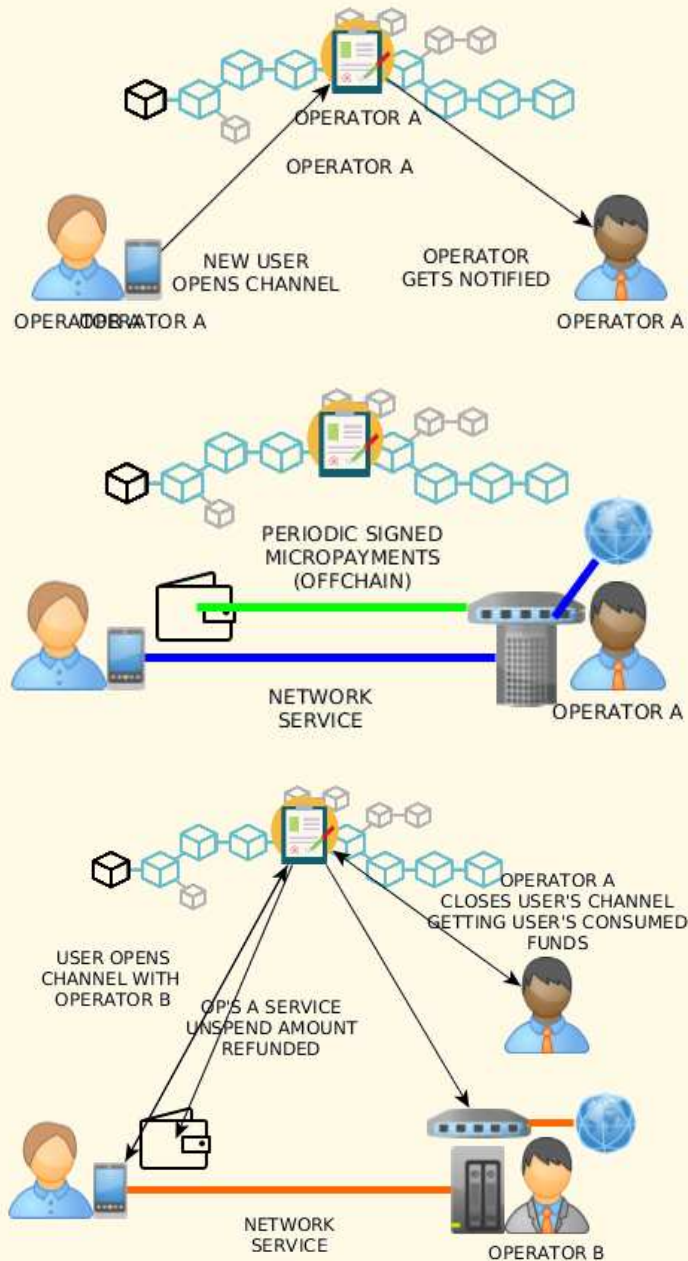


Figure 5. State channels support instant portability between different operators with minimal fee.

6.4. Towards telco market full tokenization. This model can be extended without limits to the full wireless telecommunication market tokenization; as depicted in figure 6,

from the spectrum auctioning, including infrastructure providers virtualizing their appliances for virtual operators, end to users service provision and accounting relying on a self-sovereign identity system.

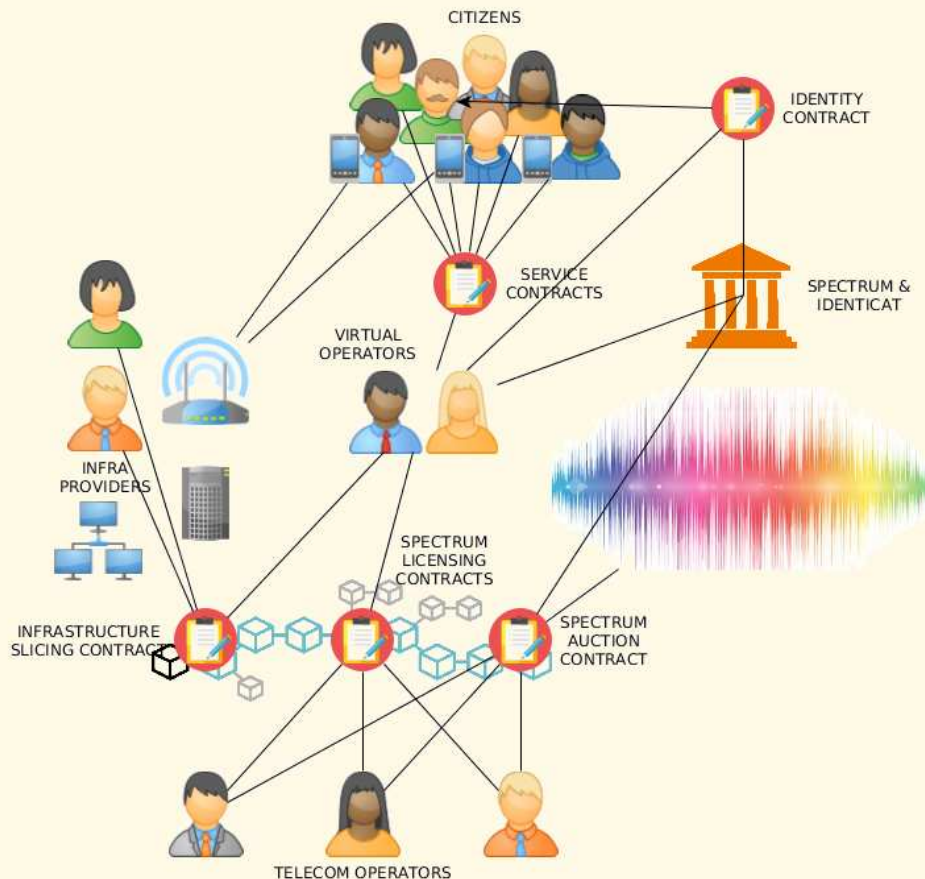


Figure 6. Full tokenization of wireless services from the spectrum licensing to the citizen.

6.4.1. *Smart contract.*

6.4.2. *Front-end.*

6.4.3. *Back-end.*

6.5. **Regulation considerations.** TODO; talk about GDPR, telco KyC, european market regulation, etc.

7. CONCLUSIONS

World we live today is interconnected and wireless internet access has a fundamental role. In this project a Proof of Concept has been build. This PoC based in commodity free hardware asset (Raspberry Pi) can serve as an example of end-user wireless provision pay-as-you-go using a state channel Solidity smart contract; KyC issues and identity consideration have been discussed also leading to the conclusion that complementing this approach with what a self-sovereign identity can

provide there's no need to a telecommunication operator to perform a KyC process in order to provision a service to a client.

One of the major problems with this approach has to do with ETH-fiat exchange volatility (*see figure 7*), anyway, including a feature to regulate minute price in the state channel contract and taking into account gas prices can adjust in order to properly represent computation, bandwidth and storage costs this problem can be completely avoided.



Figure 7. ETH Price chart (11/08/2019).
Source: [Coinbase 19]

7.1. Usar Docker Swarm. Se podría presentar una aplicación descentralizada basada en microservicios. Por ejemplo en microservicios, un contenedor Docker (como en la sección 4) podría verse como un servicio. Entre las ventajas que aporta microservicios estarían:

- Pequeños
- Independientes
- Despliegue sencillo
- Reutilizables
- Externalización
- Escalabilidad

Para ello, Docker ofrece un orquestador (de código abierto) llamado Docker Swarm (véase figura 4). Un nodo *worker* sería nuestra Raspberry Pi y un nodo *manager* sería un centro de control.

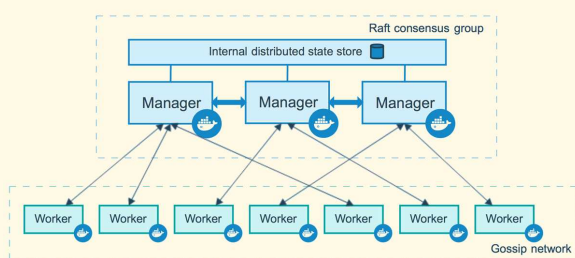


Figura 4. Diagrama Docker Swarm. Fuente: [Docker 19]

8. REPOSITORIO

El código fuente generado en el proyecto está publicado en un repositorio público de GitHub bajo licencia MIT.

<https://github.com/ethereum-internet-access>

REFERENCES

[1] 5G Spectrum and Neutral Hosting, Discussion paper, February 2019, DCMS Phase 1 5G Testbeds & Trials Programme
 [2] <https://en.wikipedia.org/wiki/5G>
 [3] Ian F. Akyildiz and Shih-Chun Lin and Pu Wang, *Wireless software-defined networks (W-SDNs) and*

network function virtualization (NFV) for 5G cellular systems: An overview and qualitative evaluation, Computer Networks, 93, 2015

[4] Jose Ordonez-Lucena et al. *Network Slicing for 5G with SDN/NFV: Concepts, Architectures, and Challenges*, IEEE Communications Magazine (Volume: 55 , Issue: 5 , May 2017)
 [5] https://es.wikipedia.org/wiki/La_Fonera
 [6] <https://devpost.com/software/hotspot-me>
 [7] <https://w1.fi/hostapd/>
 [8] <https://linux.die.net/man/8/iptables>
 [9] <https://en.wikipedia.org/wiki/Dnsmasq>
 [10] <https://osmc.tv/>
 [11] <https://www.5gcity.eu/>
 [12] <http://www.lifewithalacrity.com/2016/04/the-path-to-self-sover>
 [13] <https://www.coindesk.com/catalonia-government-to-build-dlt-b>
 [14] Coinbase. Intercambio de moneda digital <https://www.coinbase.com/price/ethereum>
 [15] Ethereum Smart Contract Best Practices. Security tools. ConsenSys. 12 Agosto 2019.
 [16] Docker Documentation. How nodes work. 6 Septiembre 2019. <https://docs.docker.com/engine/swarm/how-swarm-mode-works>
 [17] Hackathon ETH Berlín Zwei. Twitter. 6 Septiembre 2019. <https://twitter.com/ETHBerlin>
 [18] P. Hegedus. "Towards Analyzing the Complexity Landscape of Solidity Based Ethereum Smart Contracts". 2018 IEEE/ACM 1st International Workshop on Emerging Trends in Software Engineering for Blockchain (WETSEB). 27 Mayo-3 Junio 2018. <https://ieeexplore.ieee.org/document/8445056>
 [19] MakerDAO. Stability for the blockchain. <https://makerdao.com/en/dai>
 [20] J. L. Muñoz. "Docker Containers". Apuntes de las clases magistrales. Máster en Tecnologías Blockchain. 1, Edición. UPC School. 29 Noviembre 2018.
 [21] S. Nakamoto. "Bitcoin: A Peer-to-Peer Electronic Cash System". 31 Octubre 2008. <https://bitcoin.org/bitcoin.pdf>
 [22] Raspberry Pi 3 Modelo B - Placa Base (1,2 GHz Quad-Core Arm Cortex-A53, 1 GB RAM, USB 2.0). Amazon. 11 Agosto 2019.
 [23] Raspberry Pi FAQs. BUYING AND SHIPPING. Where can I buy a Raspberry Pi?. Página Web oficial. 11 Agosto 2019. <https://www.raspberrypi.org/help/faqs/#buyingWhere>
 [24] W. Stallings. "Comunicaciones y redes de computadores". 1 Septiembre 2004. Páginas 904. Pearson Prentice Hall. ISBN-13: 978-8420541105.