


github.com/ethmarana

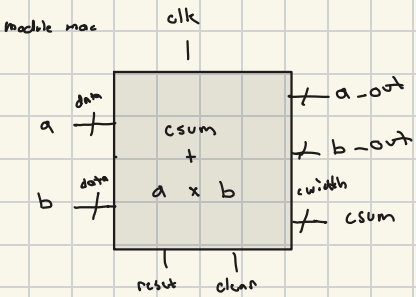

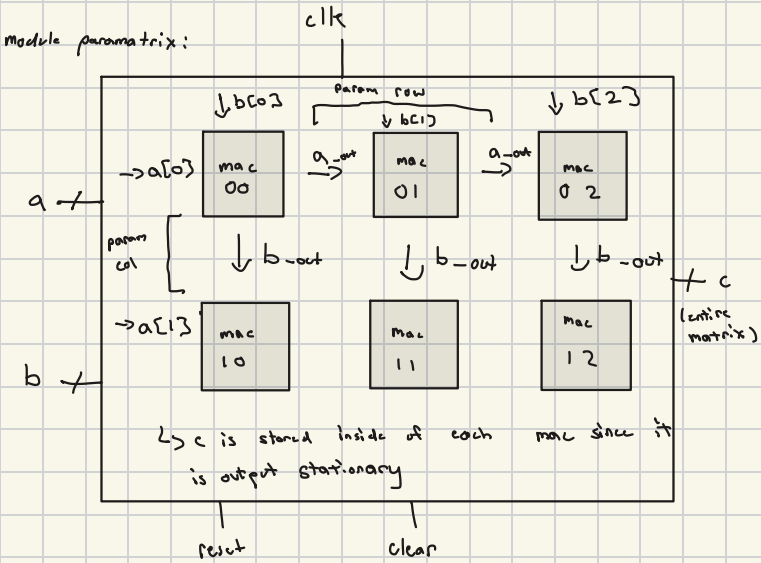

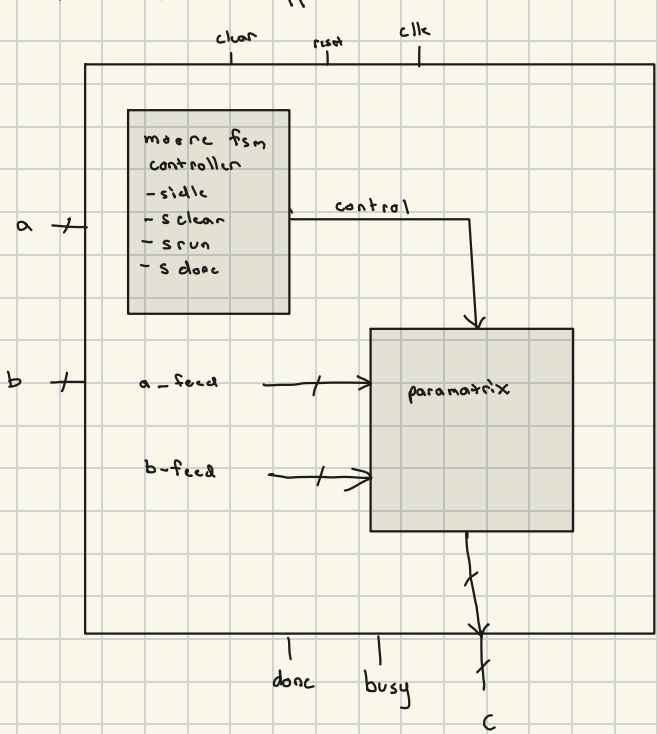

Since a → and b ↓ per clock cycle, elements take different amounts of time to reach each PE. This means that the A and B input feed must be skewed so that the correct A and B values arrive at each PE on the same clock cycle.

ex: $A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$ $B = \begin{bmatrix} 5 & 6 \\ 7 & 8 \end{bmatrix}$

cycle count	A[0]	A[1]	B[0]	B[1]
0	1	0	5	0
1	2	3	7	6
2	0	4	0	8
3	0	0	0	0