

PUMIPic Applications

Unstructured mesh particle-in-cell fusion applications using PUMIPic. Supporting the analysis of tokamak plasma physics and impurity transport using extensions to the PUMIPic framework.

■ XGCm

- Core and edge fusion plasma physics with ions and kinetic electrons
- Tokamak: 2D mesh partitioned into PICParts (see PUMIPic slide) based on bounding flux surfaces
- A group of processes is assigned to a PICPart and $1/P^{\text{th}}$ of the torus in the toroidal direction – group size controls particle load on each GPU
- Initial focus on performance and scaling with pseudo operations
- Weak scaling on up to 24,000 GPUs of Summit with 1.15 trillion particles running push, particle-to-mesh, and mesh-to-particle operations
- Current focus on verification and performance.

■ GITRm

- Impurity transport
- 3D meshes PICParts formed using graph based partitions
- Tracking wall collisions and multiple species
- Initial focus on verifying implementation of all physics model terms
- Statistical and numerical verification complete
- Current focus on performance and scalability







Rensselaer



XGCm weak scaling on Summit

D3D, 2M elm. mesh,
192 PICParts/plane,
1 to 128 planes,
48M ptcls/GPU,
6 GPUs/node

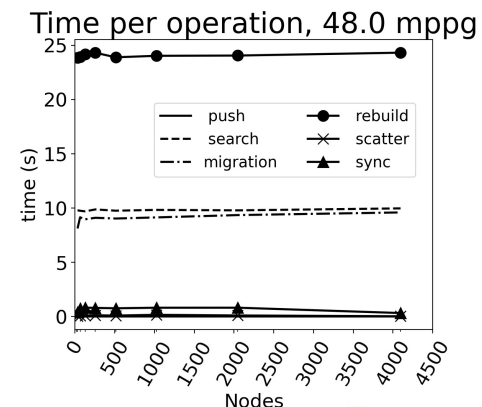

3D unstructured mesh with anisotropic refinement. Less than 1% difference vs. GITR in gross erosion and deposition.

GITRm ITER test case

Contact: Mark S. Shephard
shephard@rpi.edu