
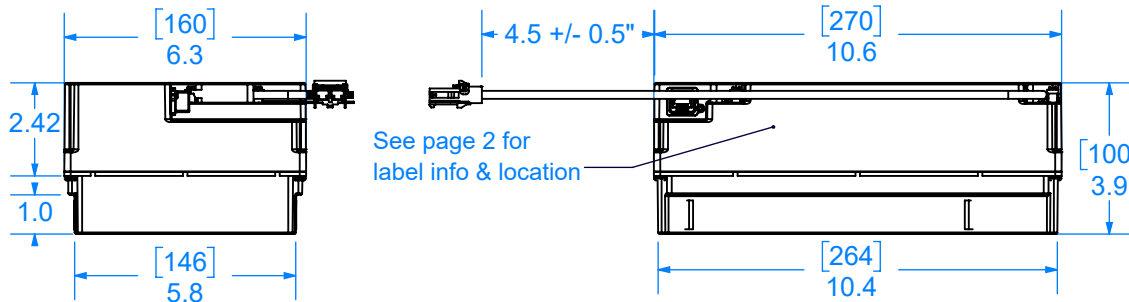
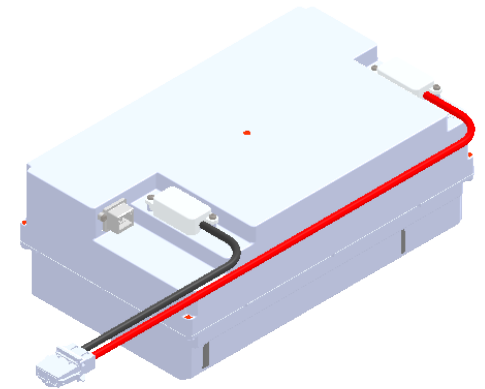


RJ45 Jack connections:

Pin	Description	Internal Wiring
1	12V Output	J1-1 Yellow
2	Wake Up Signal	J1-7 White
3	Ground	J1-2 Violet
4	No Connection	
5	CAN Vcc	J1-5 Red
6	CAN Ground	J1-11 Black
7	CAN_H	J1-6 Green
8	CAN_L	J1-12 Blue

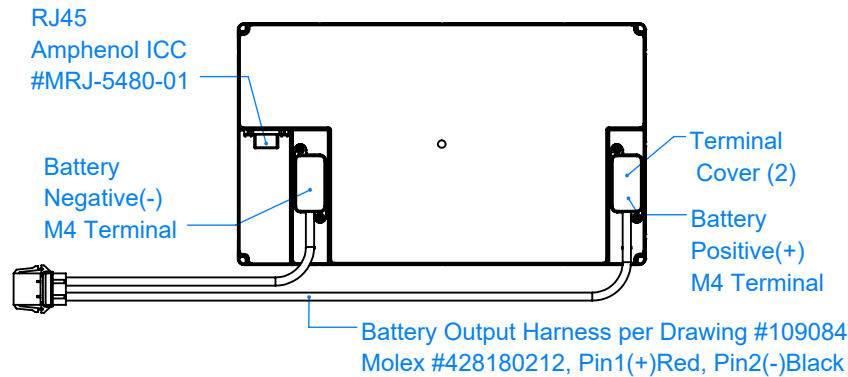

NOTE: Reference Eberspacher Vecture V04265 Datasheet for pack wake up/shutdown functionality.

SPECIFICATIONS:

- Chemistry: LiFePO4
- Series/Parallel arrangement: 16S3P
- Pack Rating: 52.8V, 7.5Ah typ., 396Wh
- Cell Manufacturer/Model: LithiumWerks ANR26650M1-B
- Protective Devices:
 - BMS Board: Vecture V04265 (CAN communication)
 - 16S Protector w/ Fuel Gauge & Cell Balancing
 - Thermistor(4): 10K NTC
 - Fuse: Two 30A in parallel, One Shot, Littelfuse 0324030.MXP
- Enclosure: Plastic, PC/ABS Blend, Flame Retardant, Rated for UL94-V0 minimum, UL94-V0/5VA if available; Color: Gray
- Application Usage: Robotics
- Charge Rate: 30A max.
- Discharge Rate: 30A max.
- Recommended Ambient Operating Temperature:
 - Charge: 0C to 40C; Discharge: 0C to 55C
- Non-Medical
- ROHS Compliant
- Regulatory Testing:
 - Transportation: Meets UN Manual of Tests & Criteria 7th Ed., Part III, Subsection 38.3 - Certificate No.: 4759288 (17JUN2021)
 - IEC62133-2:2017 CB Certificate BE-40082 (24AUG2021)
 - UL2054 2nd Ed.: SGS Test Report SUW-4759288-001 (09JUL2021)

Rev. A | 16FEB2021 KWH | Initial release. Added Output Harness info. Fuse from 40A to two 30A in parallel. Output terminal was M6 size. Added enclosure UL ratings & 2nd page with Label info.
Rev. B | 06APR2021 KWH | Added BG info to Traceability Label on pg. 2.
Rev. C | 20SEP2021 KWH | BG P/N to Rev. C. Pack functionality per EV datasheet. FW=Version R120; HW=Version 03.

Customer Approval By: ALEX LONG

APPROVED AT RISK

Title: _____ Date: 09/29/2021

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CELL-CON INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF CELL-CON INC. IS PROHIBITED.

TITLE: LiFePO4 Battery Pack Assembly



305 Commerce Dr., #300
Exton, PA 19341
Phone: (800) 771-7139
Fax: (610) 280-7685
www.cell-con.com

PRODUCT NO.: 86318

REV.: C

APPROVALS

INITIAL & DATE

DRAWING NO.: 86318

PAGE: 1 of 2

ENGINEERING:

DRAWN BY: RLN

DATE: 11DEC2020

QUALITY:

CUSTOMER: BERKSHIRE GREY

PRODUCTION:

CUSTOMER NO.: 109100-10S Rev. C

OTHER:

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:


DECIMALS ANGLES

.X: +/- .015 +/- 1

.XX: +/- .010

.XXX: +/- .005

DO NOT SCALE DRAWING

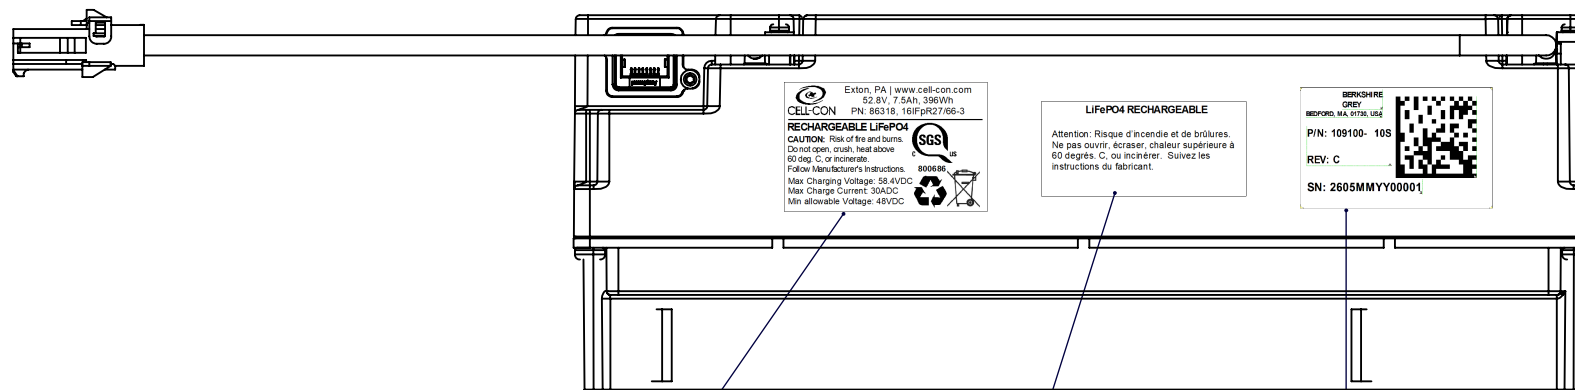

Regulatory Info Label
2.12" x 1.35"

French Caution Label
2.12" 1"

Traceability Label
2" x 1.25"

2D Data Matrix BarCode

Format: 109100-10S,C,2605MMYY00001

2605 = Cell-Con supplier ID

MM = Month of Manufacturer, ex. 02=Feb

YY = Year of Manufacturer, ex. 21=2021

00001 = Sequential Serial Number

S/N to be reset back to 00001 every month

Notes:

- 1) Label location: Equally spaced along front surface in approximate location as shown above.
- 2) Reference BG Traceability document 109230 latest revision.

TITLE: Battery Pack	PRODUCT NO.: 86318	REV.: C
 305 Commerce Dr., #300 Exton, PA 19341 Phone: (800) 771-7139 Fax: (610) 280-7685 www.cell-con.com	DRAWING NO.: 86318	PAGE:2 of 2
DRAWN BY: RLN	DATE: 11DEC2020	