

Main microcontroller


TITLE: mainboard_eurobotics2010_r3

Document Number:

REV:

Date: 22/01/2010 19:04:40

Sheet: 2/9

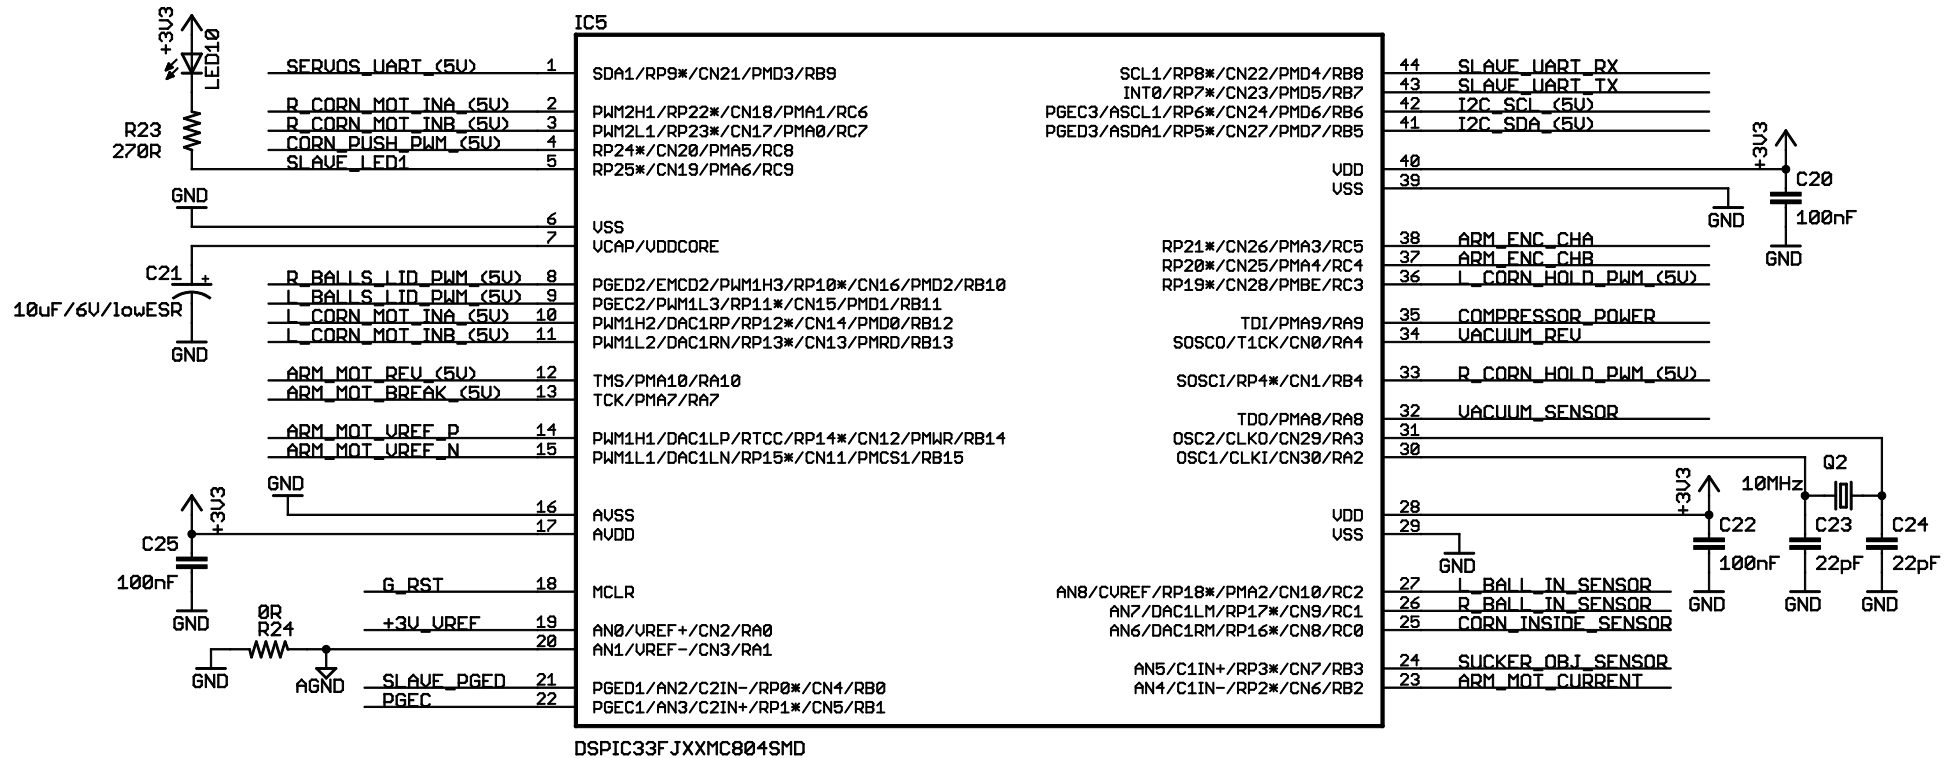

Slave microcontroller


TITLE: mainboard_eurobotics2010_r3

Document Number:

REV:

Date: 22/01/2010 19:04:40

Sheet: 3/9

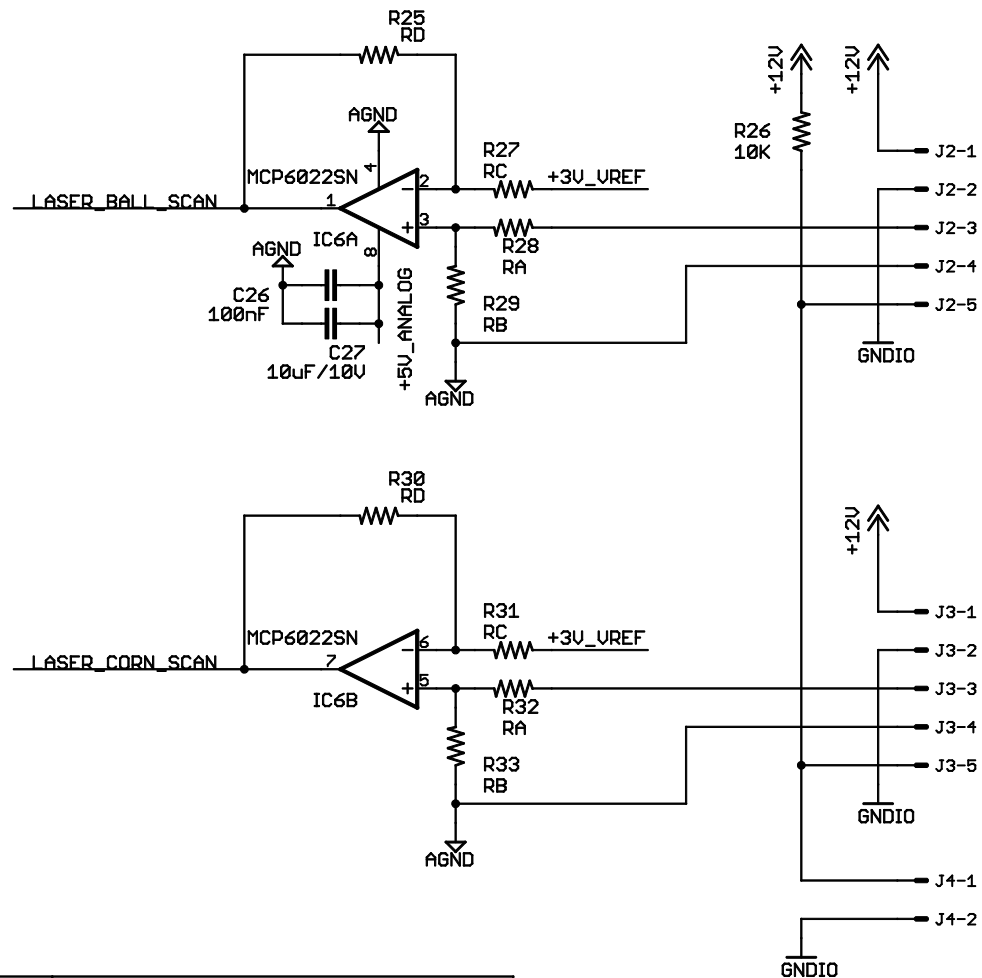

Output laser type	Resistance values			
	RA	RB	RC	RD
Voltaje	10K/1%	4K3/1%	NC	0R
Current	0R	187R/1%	1K1/1%	3K3/1%

Note: In voltaje type $R_A = 2.33R_B$.
Note: In current type $R_D = 3R_C$.

Analog sensors












TITLE: mainboard_eurobotics2010_r3

Document Number:

REV:

Date: 22/01/2010 19:04:40

Sheet: 4/9

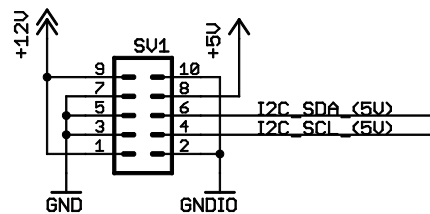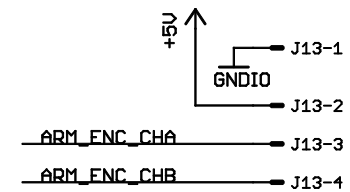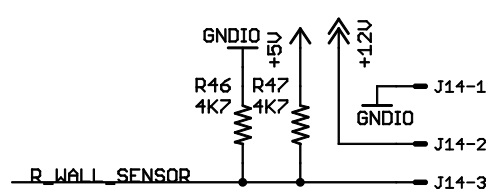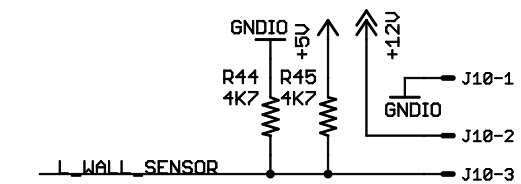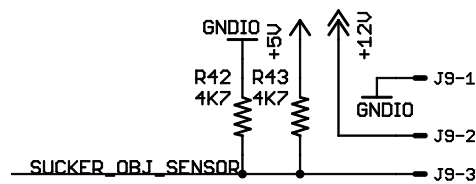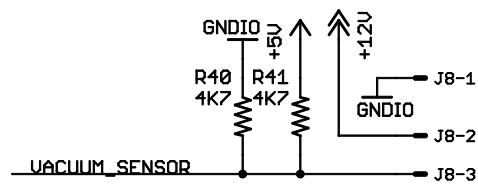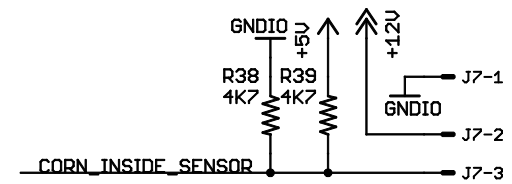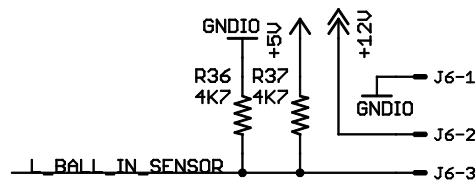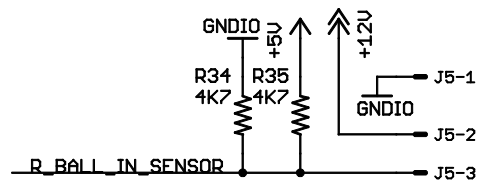

Digital sensors







TITLE: mainboard_eurobotics2010_r3

Document Number:

REV:

Date: 22/01/2010 19:04:40

Sheet: 5/9

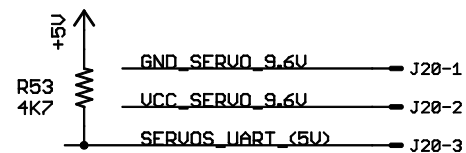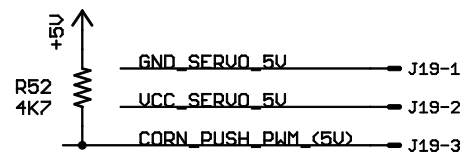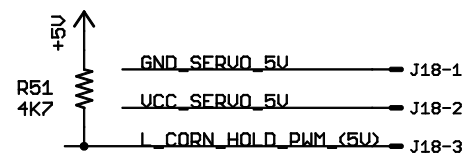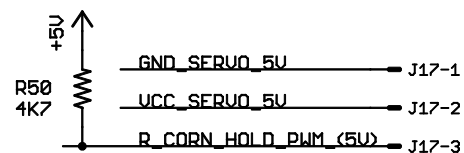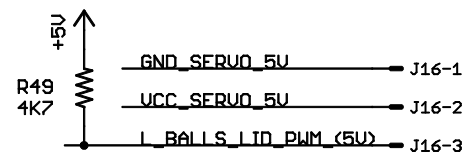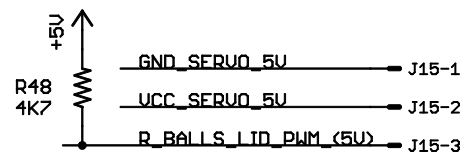

Servo motors


TITLE: mainboard_eurobotics2010_r3

Document Number:

REV:

Date: 22/01/2010 19:04:40

Sheet: 6/9

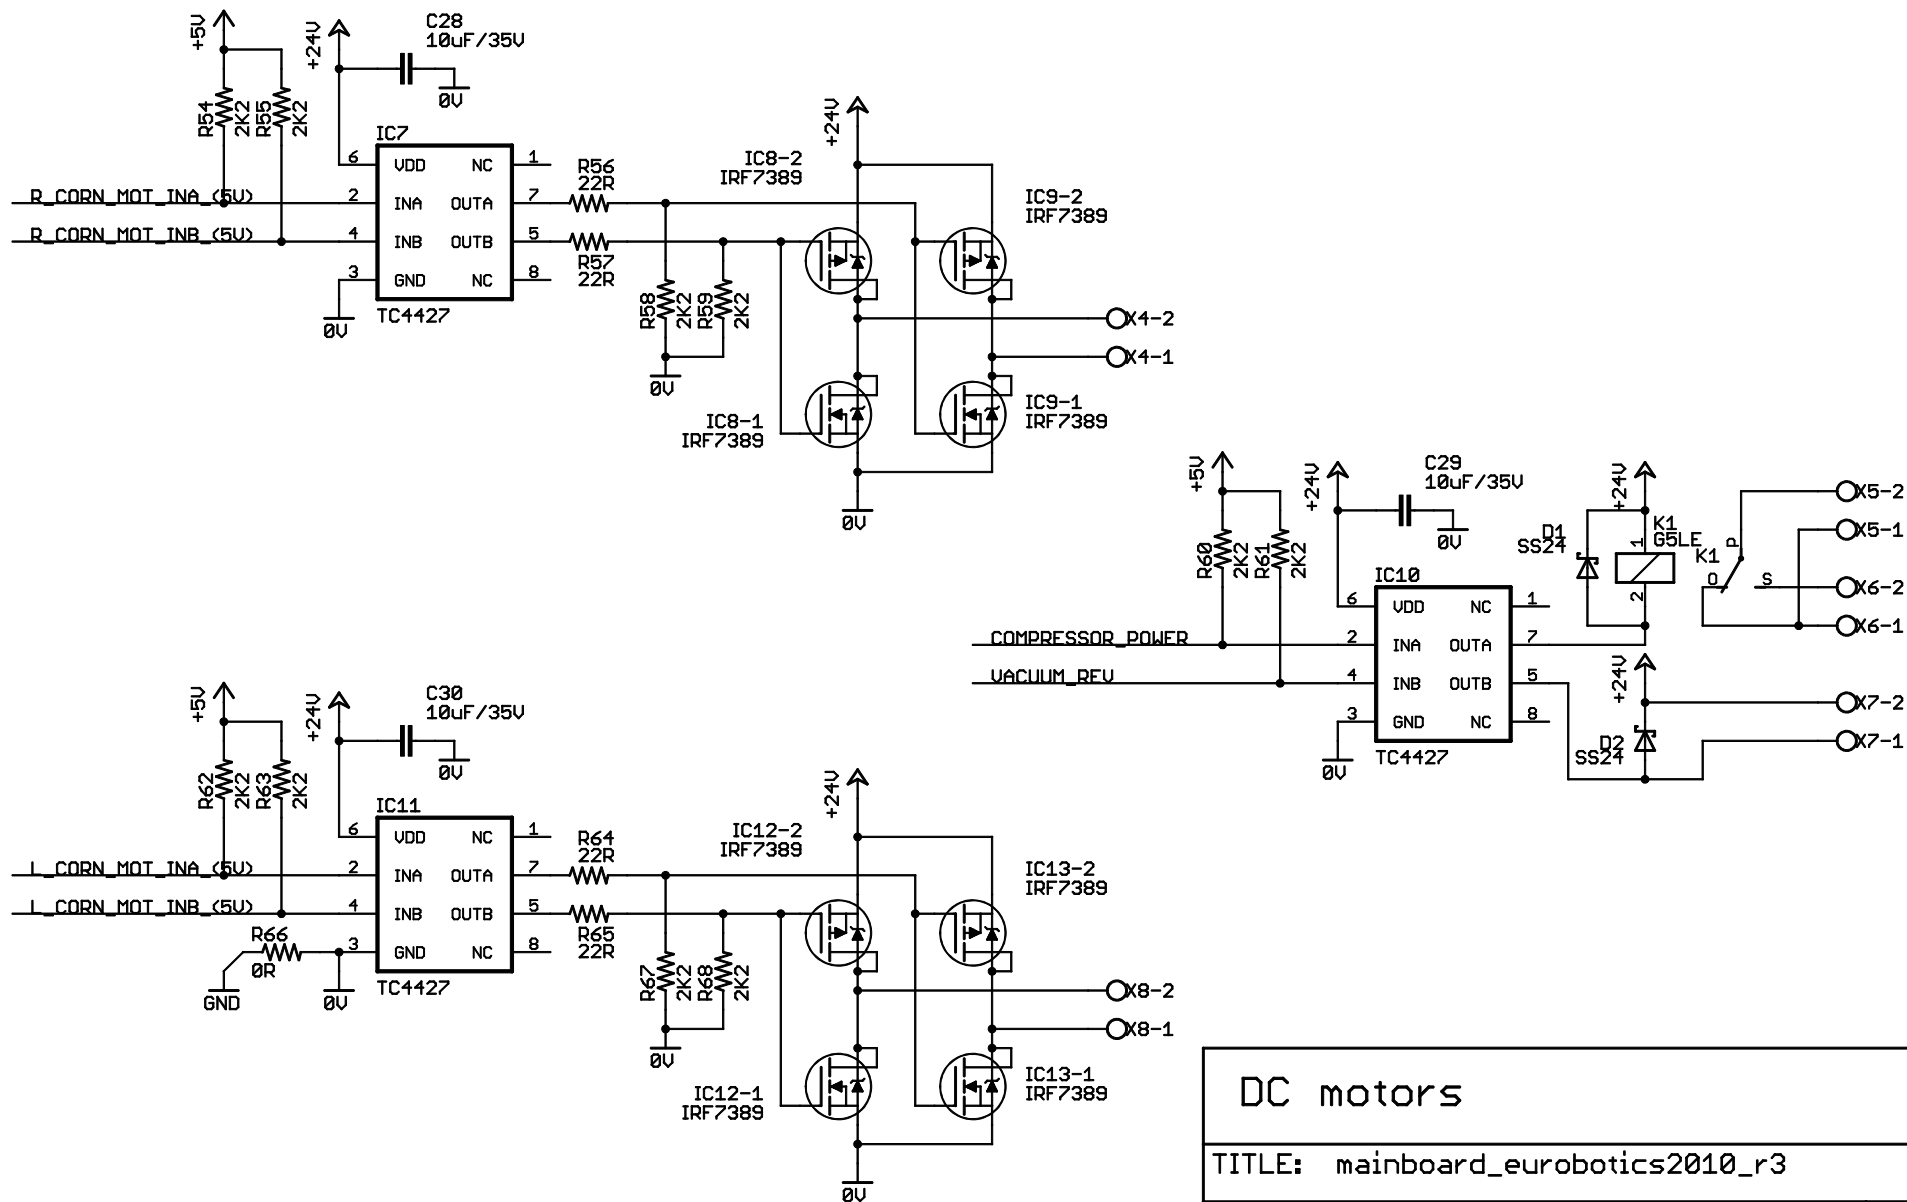

DC motors



TITLE: mainboard_eurobotics2010_r3




Document Number:

REV:

Date: 22/01/2010 19:04:40

Sheet: 7/9

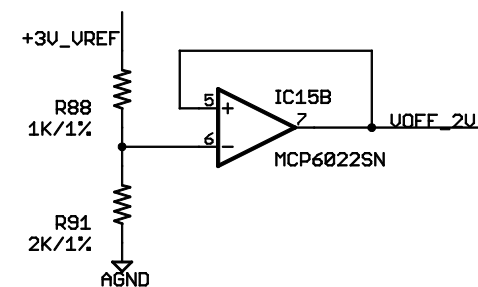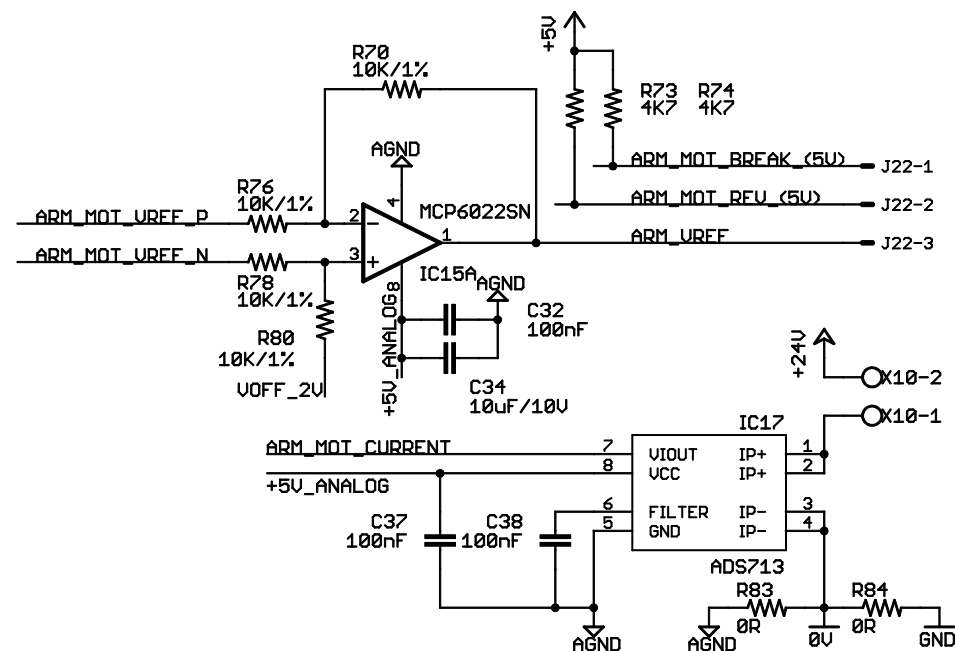

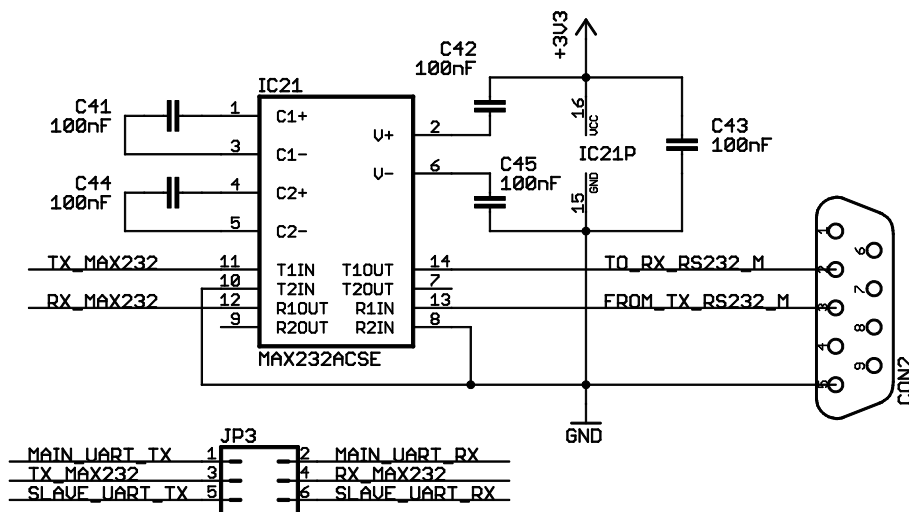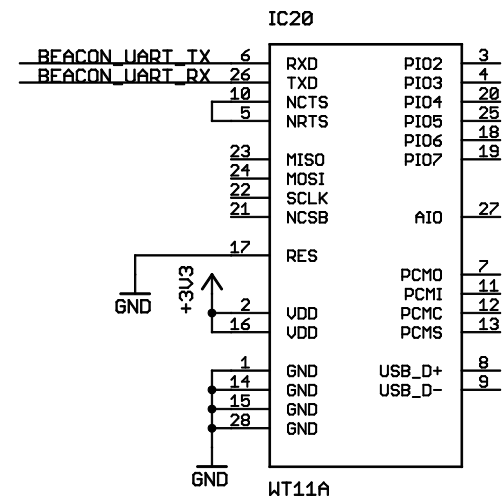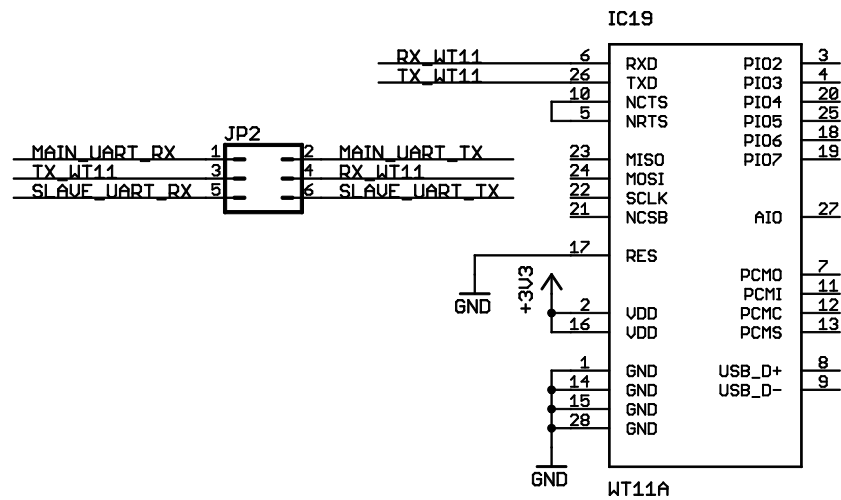

Bluetooth and RS232

TITLE: mainboard_eurobotics2010_r3

Document Number:

REV:

Date: 22/01/2010 19:04:40

Sheet: 9/9