


RM10-Q-M04-BODY

Front elevation and front-hole coordinates

FRONT VIEW 4:5 - VIEW ALONG +Y

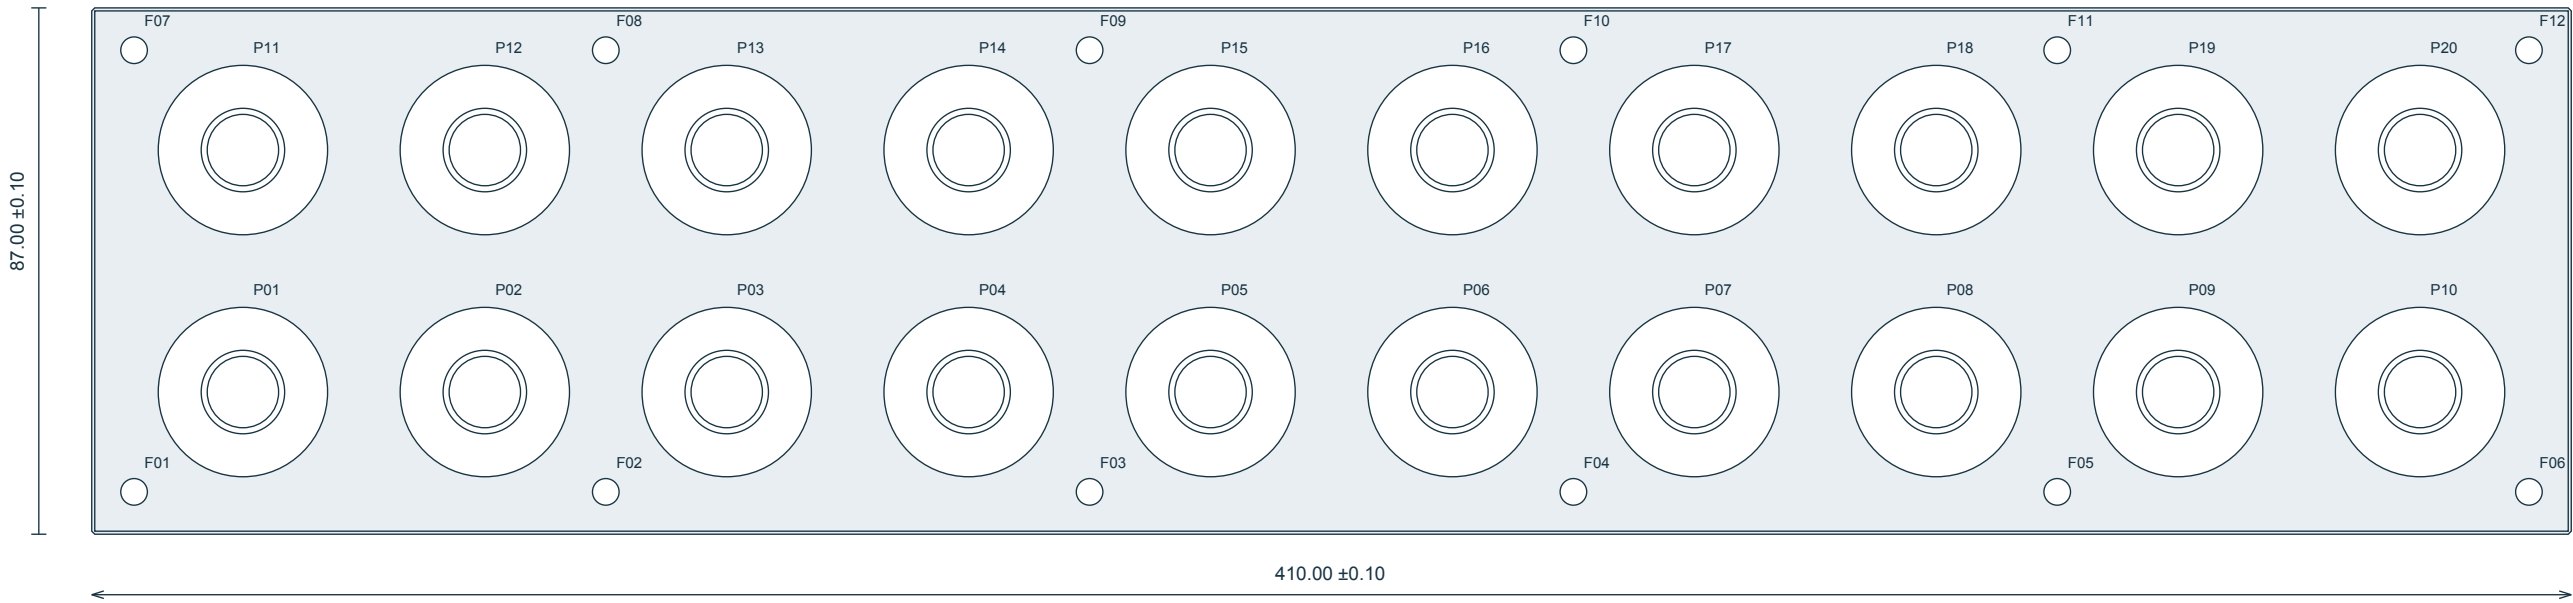

P01-P20: G 1/4 FEMALE; integral bosses Ø28 ±0.10 ×3.00 ±0.05 high.

F01-F12: M4 ×0.7 - 6H; 10 MIN full thread after entry; Ø3.30 pilot ×13.00 full depth.

ID	X	Z
P01	-180.000	23.500
P02	-140.000	23.500
P03	-100.000	23.500
P04	-60.000	23.500
P05	-20.000	23.500
P06	20.000	23.500
P07	60.000	23.500
P08	100.000	23.500
P09	140.000	23.500
P10	180.000	23.500

ID	X	Z
P11	-180.000	63.500
P12	-140.000	63.500
P13	-100.000	63.500
P14	-60.000	63.500
P15	-20.000	63.500
P16	20.000	63.500
P17	60.000	63.500
P18	100.000	63.500
P19	140.000	63.500
P20	180.000	63.500

ID	X	Z
F01	-198.000	7.000
F02	-120.000	7.000
F03	-40.000	7.000
F04	40.000	7.000
F05	120.000	7.000
F06	198.000	7.000
F07	-198.000	80.000
F08	-120.000	80.000
F09	-40.000	80.000
F10	40.000	80.000
F11	120.000	80.000
F12	198.000	80.000

Datum A: front mounting plane Y0; flatness 0.15. Datum B: width midplane X0. Datum C: bottom Z0.

Front boss sealing faces Y-3.00; rear face Y40.00. Slab 40.00 ±0.10; overall depth 43.00 REF.

F01-F12 X/Z ±0.05; port coordinates ±0.10. Root R1.00 ±0.10; outer boss lip C0.50 ±0.10 ×45° ±1°.

20 front +4 side +4 rear =28 G1/4 ports. Threads are pilot representations in STEP; tap per sheet 3.

Black unfilled POM-C or POM-H | Declare grade and machining-stock datasheet

SUPPLIER MANUFACTURING REVIEW

RM10-Q-M04-BODY


Rear and end ports - alignment to the same two galleries



B01-B04: four rear G1/4 ports. Dashed Ø28 lands are flat reference areas, not grooves.

Gallery axes Y20.00 ±0.10, Z23.50 /63.50 ±0.10 at each end face; Ø11.80 +0.08/0 THROUGH.

RIGHT END 1:1

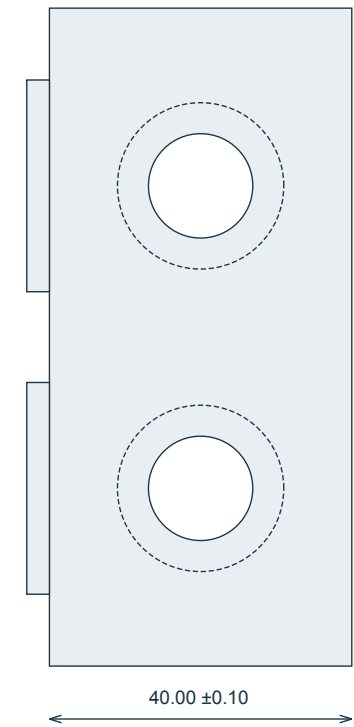

Both end faces:

X = -205.00 /+205.00.

Y = 20.00; Z =23.50 /63.50.

Ø22 MIN flat seal lands.

Left end is mirrored.

D / SLAB EDGE DETAIL 10:1



All 12 slab perimeter edges.

8 triangular corner flats per STEP.

ID	X	Y	Z
E01	-205.000	20.000	23.500
E02	-205.000	20.000	63.500
E03	205.000	20.000	23.500
E04	205.000	20.000	63.500
B01	-180.000	40.000	23.500
B02	180.000	40.000	23.500
B03	-180.000	40.000	63.500
B04	180.000	40.000	63.500

E01-E04: 4x G1/4 at longitudinal gallery ends.

B01-B04: 4x G1/4 at Y40 rear face, opposed to outer front pairs.

Rear pilot: Ø11.80 ×20.00 ±0.20 full diameter from rear face,


plus 118° drill point; axis intersects the matching gallery.

Each row is one continuous network. No internal row link.

RM10-Q-M04-BODY

Port/retention sections and manufacturing requirements

A-A / THROUGH ALIGNED FRONT AND REAR PORT (2:1)

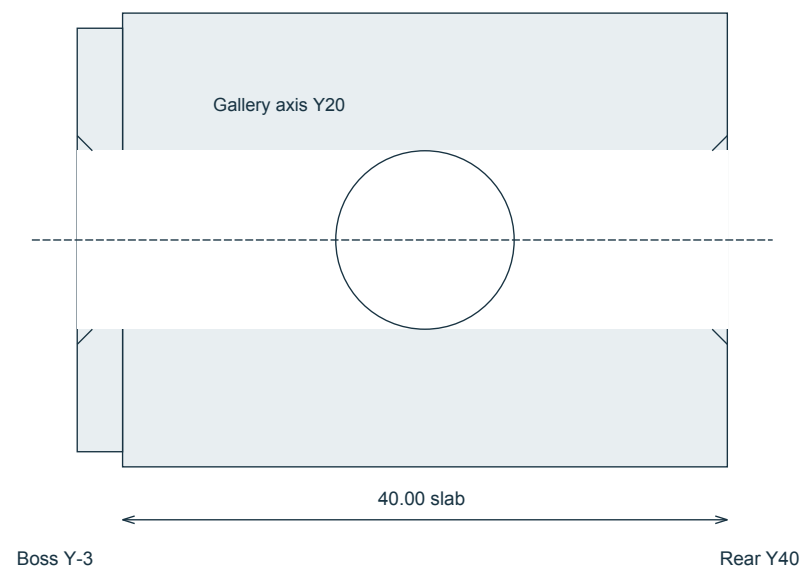

ALL 28 PORTS: G 1/4, DIN EN ISO 228-1, parallel BSPP.
19 TPI / pitch 1.33684 REF; 55° thread form; right hand.
8 MIN full-form thread AFTER entry. Gauge to ISO 228-2.
Entry Ø13.80 ±0.10 ×90° ±1° included (45° per side);
1.00 depth REF to Ø11.80 pilot. No NPT/R/Rp substitute.
Front pilot: 23.00 ±0.20 full diameter from boss sealing face.
Rear pilot: 20.00 ±0.20 full diameter from rear sealing face.
Front/rear drill point 118° ±2° (tip inside gallery).
Thread + run-out maximum from seal face: front/end 16.00;
rear 12.00. Supplier to select tap/thread-milling process.
Section shows open passage; aligned front/rear points overlap.
Other front ports terminate in their gallery with the drill point.

M4 RETENTION / F01-F12

12x M4 ×0.7 - 6H; 10 MIN full thread after entry.
Ø3.30 ±0.05 pilot ×13.00 ±0.10 full diameter from A.
118° ±2° point; 13.99 total drilled depth REF.
Entry Ø4.40 ±0.10 ×90° ±1° included; depth 0.55 REF.
10.55 total minimum thread reach from A REF.
2.45 unthreaded full-diameter tap allowance REF.
Gauge to ISO 1502; no inserts.
Blind pilot depth excludes its conical drill point.
All twelve F holes are blind and isolated from fluid bores.
Supplier must confirm tapping/run-out before machining.

Two Ø11.80 +0.08/0 galleries THROUGH 410 mm. Opposed drilling permitted: 207 mm reach per end /4 mm overlap REF.
Gallery centreline deviation ≤0.30 from nominal; meeting step ≤0.30; no blind web or wall breakthrough.
General DIN ISO 2768-1 class m; coordinate tolerances ±0.10 unless stated. Dimensions after stock stabilisation at 20°C.
Use sound black unfilled POM-C or POM-H stock; declare grade and supply datasheet before manufacture.
Confirm long-bore tooling, thread process and functional finishes. Report proposed deviations before manufacture.
Inspect finished threads, bore continuity, all datum dimensions, surface finishes and specified flatness.

FUNCTIONAL SURFACES / FINISH

All seal lands: Ra ≤1.6 µm; local flatness ≤0.05.
Front annulus Ø13.8 to Ø27 REF; rear Ø28 flat land;
each side port Ø22 MIN flat land. No radial scratches.
Seal-face perpendicularity to thread axis ≤0.05 across Ø22.
Exterior POM Ra ≤3.2 µm; unthreaded bores Ra ≤6.3 µm.
12 slab perimeter edges: C0.50 ±0.10 ×45° ±1°; see STEP.
Other external edges: break 0.20 max; protect seal lands.
NO INTERNAL BORE / CROSS-HOLE DEBURR OPERATION.
Clean/flush loose chips; deliver dry, clean and unmarked.
No polishing, coating, impregnation or adhesive repairs.