


SN1260-R6-M01-PLATE

Supernova 1260 radiator / NF-A20 rack plate - profile and feature identification

R6 CABLE NOTCH / ISSUE M01

Single flat plate - all features through

FRONT VIEW 1:2 / IDENTIFIERS REFER TO SHEET 2

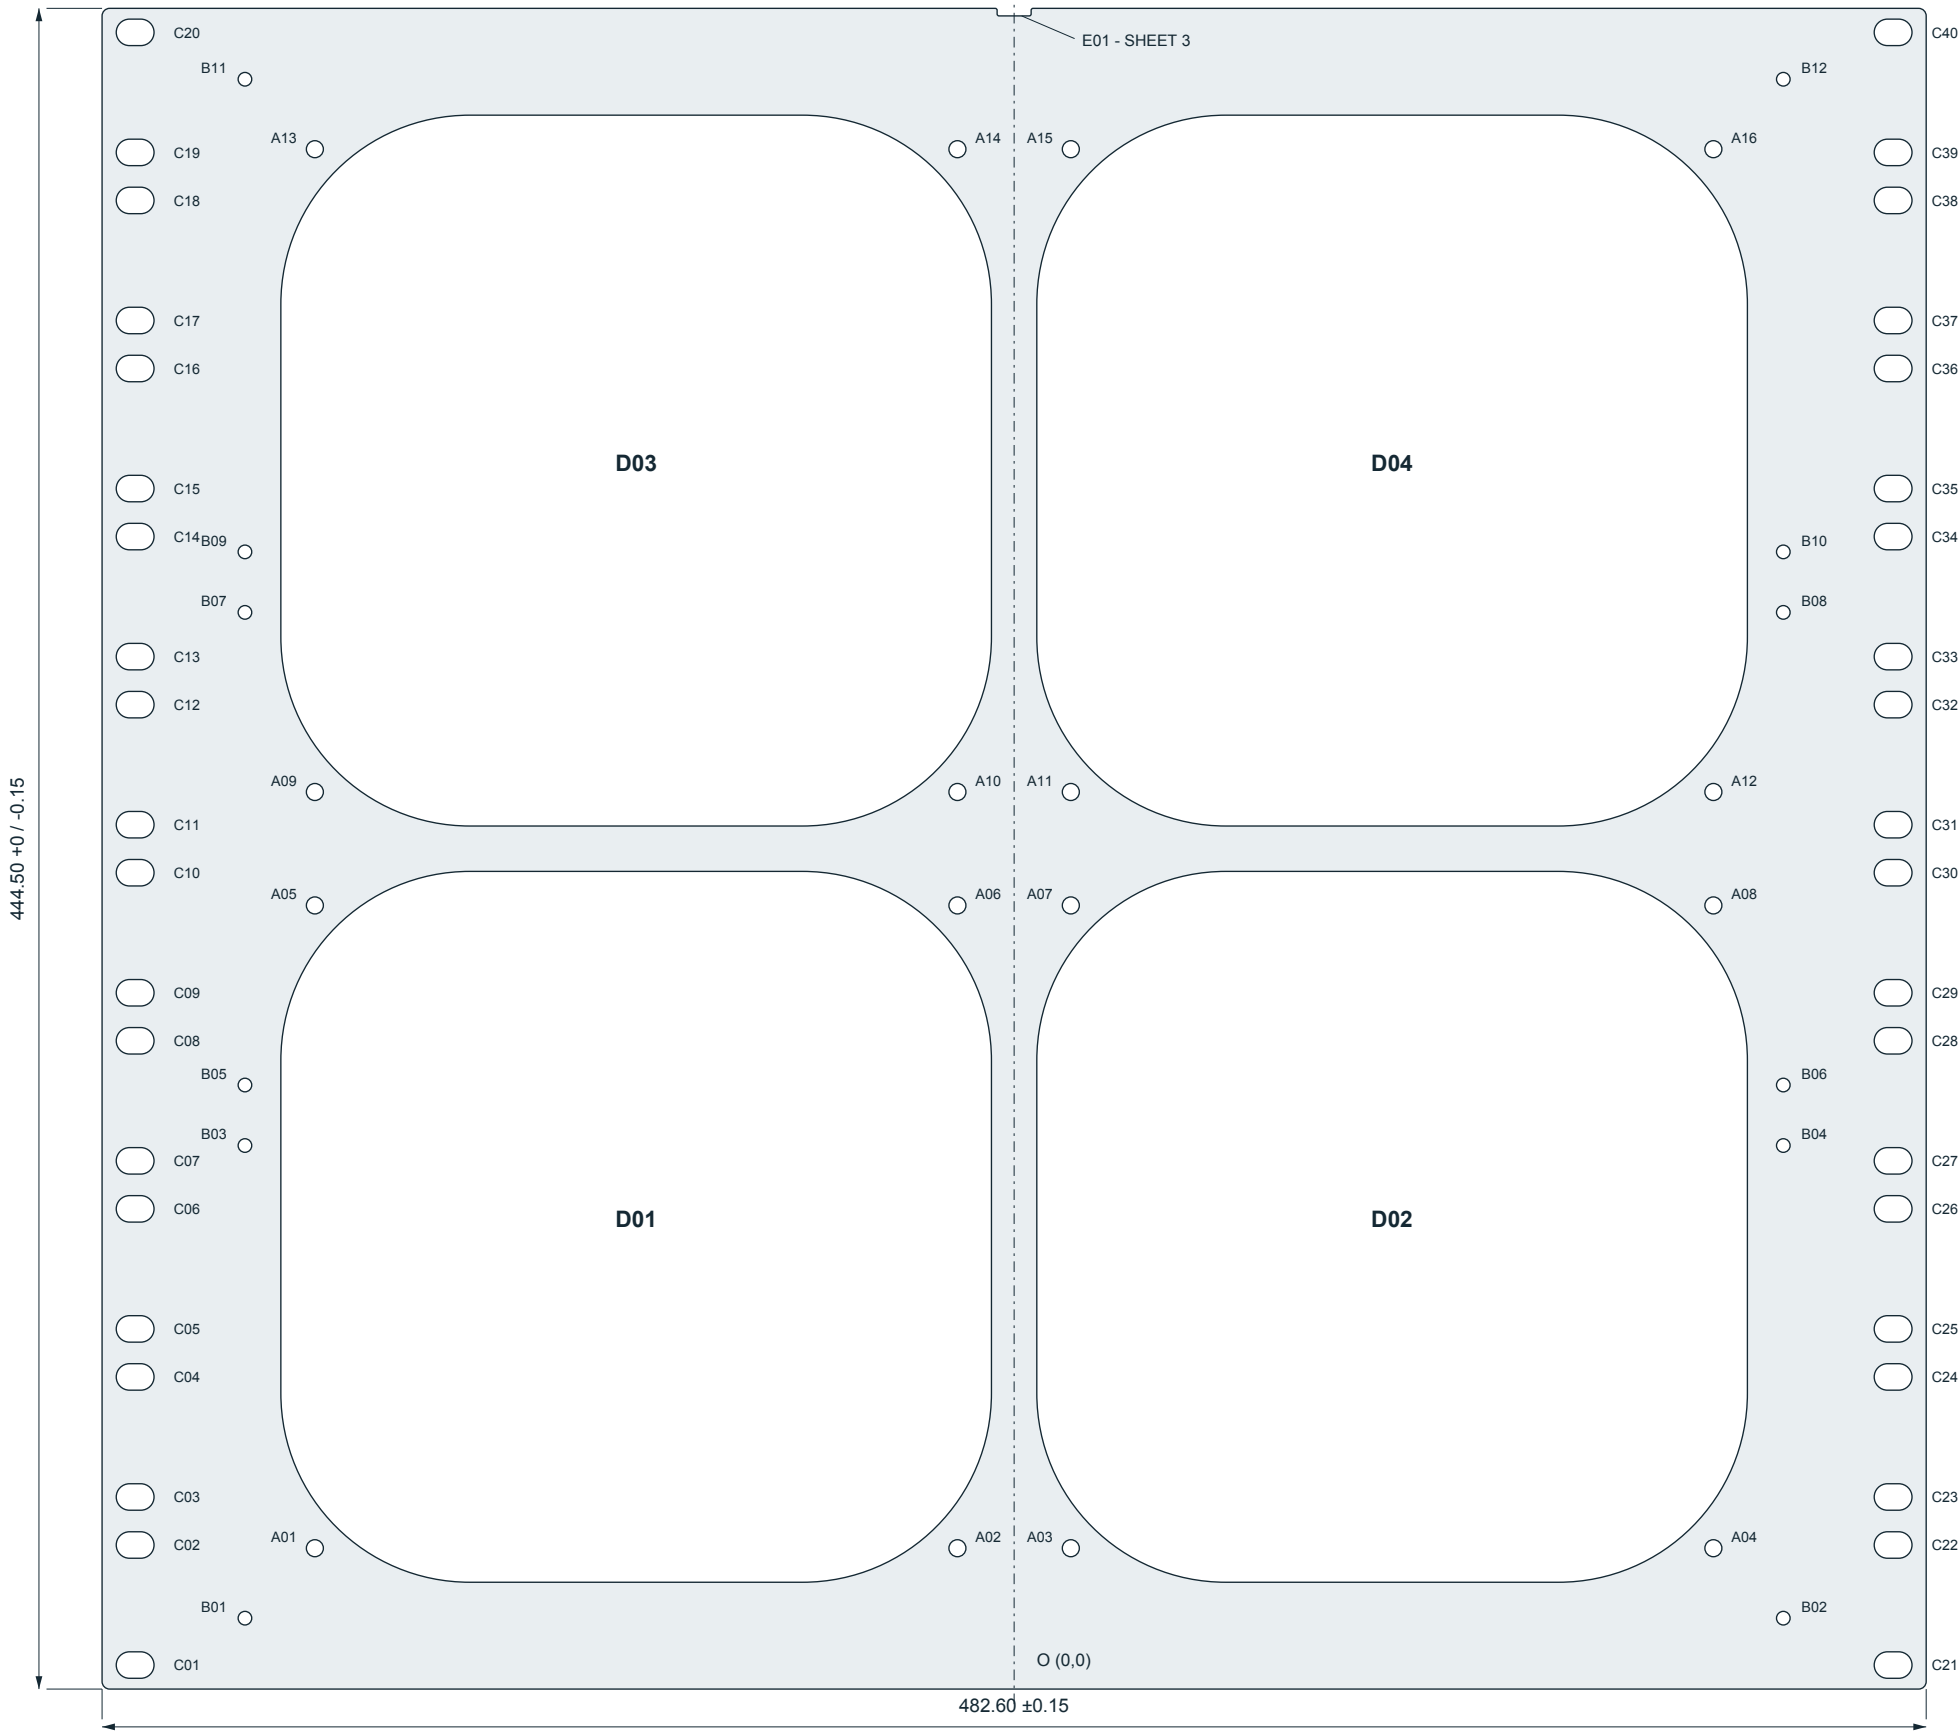

FEATURES

- A01-A16: 16x Ø4.50 +0.15/0 THROUGH.
- Plain fan mounting holes for M4 screws + nuts.
- B01-B12: 12x Ø3.60 +0.15/0 THROUGH.
- Plain radiator mounting holes for M3 screws.
- M3 threads are in the bought-in radiator.
- C01-C40: 40x 10.00 ±0.15 x 7.00 +0.15/0 horizontal slots THROUGH; semicircular ends.
- D01-D04: 4x 188.00 ±0.15 square cut-outs, corner R50.00 ±0.15, THROUGH.
- Outer corners: 4x R2.00 ±0.15.
- E01: rounded top cable notch; see sheet 3.

MANUFACTURING NOTES

- One flat 2 mm sheet; no bends or welds.
- NO TAPPED HOLES IN THIS PLATE.
- NO COUNTERSINKS OR COUNTERBORES.
- Laser-cut profile and slots. Drill/finish round holes where necessary to meet this drawing.
- Fan holes A: edge break 0.10 max both faces.
Other edges: break 0.20-0.30; E01 see sheet 3.
Edge breaks are not modelled in STEP.
- Flatness: 0.50 max, free state, whole plate.
- Uniform satin brushed finish; no coating, engraving, printing or identification marks.
- Do not add fasteners, rivet nuts or standoffs.
- Confirm specified tolerances and flatness before fabrication; report discrepancies.

COORDINATES AND TOLERANCES

- Origin O: width centreline at bottom edge.
- X right; Y up; all feature axes normal to sheet.
- Hole / slot centre X,Y coordinates: ±0.10.
- Other profile dimensions: ±0.15 unless stated.
- Dimensions apply after finishing; full through diameters exclude the permitted edge breaks.

- Matching STEP defines the nominal geometry.
- All dimensions / feature IDs are drawing-only.

304 / EN 1.4301 stainless steel; thickness 2.00 ±0.10

Units: mm; dimensions at 20°C; do not scale

Geometry R6; 2026-09-15

Production drawing / quotation and supplier review

No threads or countersinks

Scale as stated

SHEET 1 / 3

No product markings

SN1260-R6-M01-PLATE

R6 CABLE NOTCH / ISSUE M01

Hole and slot coordinate schedules - all 68 fixing positions and four air apertures

Single flat plate - all features through

A: FAN HOLES / 16x Ø4.50 +0.15/0

ID	X	Y
A01	-185.000	37.250
A02	-15.000	37.250
A03	15.000	37.250
A04	185.000	37.250
A05	-185.000	207.250
A06	-15.000	207.250
A07	15.000	207.250
A08	185.000	207.250
A09	-185.000	237.250
A10	-15.000	237.250
A11	15.000	237.250
A12	185.000	237.250
A13	-185.000	407.250
A14	-15.000	407.250
A15	15.000	407.250
A16	185.000	407.250

B: RADIATOR HOLES / 12x Ø3.60 +0.15/0

ID	X	Y
B01	-203.500	18.750
B02	203.500	18.750
B03	-203.500	143.750
B04	203.500	143.750
B05	-203.500	159.750
B06	203.500	159.750
B07	-203.500	284.750
B08	203.500	284.750
B09	-203.500	300.750
B10	203.500	300.750
B11	-203.500	425.750
B12	203.500	425.750

C: RACK SLOTS / 40x 10.00 x 7.00

ID	X	Y	ID	X	Y
C01	-232.550	6.350	C21	232.550	6.350
C02	-232.550	38.100	C22	232.550	38.100
C03	-232.550	50.800	C23	232.550	50.800
C04	-232.550	82.550	C24	232.550	82.550
C05	-232.550	95.250	C25	232.550	95.250
C06	-232.550	127.000	C26	232.550	127.000
C07	-232.550	139.700	C27	232.550	139.700
C08	-232.550	171.450	C28	232.550	171.450
C09	-232.550	184.150	C29	232.550	184.150
C10	-232.550	215.900	C30	232.550	215.900
C11	-232.550	228.600	C31	232.550	228.600
C12	-232.550	260.350	C32	232.550	260.350
C13	-232.550	273.050	C33	232.550	273.050
C14	-232.550	304.800	C34	232.550	304.800
C15	-232.550	317.500	C35	232.550	317.500
C16	-232.550	349.250	C36	232.550	349.250
C17	-232.550	361.950	C37	232.550	361.950
C18	-232.550	393.700	C38	232.550	393.700
C19	-232.550	406.400	C39	232.550	406.400
C20	-232.550	438.150	C40	232.550	438.150

D: APERTURE CENTRES / 4x 188 SQUARE, R50

ID	X	Y
D01	-100.000	122.250
D02	100.000	122.250
D03	-100.000	322.250
D04	100.000	322.250

All scheduled X,Y coordinates: ±0.10 for A/B/C.

D centre coordinates: ±0.15. Values are not chain dimensions.


A/B holes and C/D cut-outs pass through the full 2 mm sheet.

No pilot bores awaiting tapping: A/B are finished clearance holes.


Inspect all 68 fixing positions for size and position.

Check overall width, height, thickness and free-state flatness.

SLOT C / 5:1

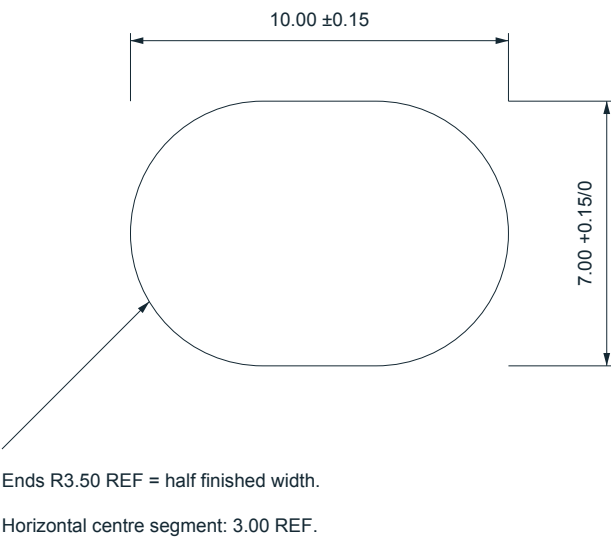

EDGE VIEW / 5:1, HEIGHT SHORTENED



All feature axes perpendicular to broad faces.

No countersink angle applies to this part.

Permitted small edge breaks: see sheet 1.

Free-state flatness 0.50 max over whole plate.

ISSUE CONTROL

Geometry R6; manufacturing issue M01.

Quote / manufacture this single plate only.

Radiator, fans, screws and nuts are bought-in.

No supplier assembly or fitting trial is requested.

Drawing tolerances require supplier acceptance.

304 / EN 1.4301 stainless steel; thickness 2.00 ±0.10

Units: mm; dimensions at 20°C; do not scale

Geometry R6; 2026-09-15

Production drawing / quotation and supplier review

No threads or countersinks

Scale as stated

SHEET 2 / 3

No product markings


SN1260-R6-M01-PLATE

R6 CABLE NOTCH / ISSUE M01

E01 - rounded top-centre fan cable notch

Single flat plate - all features through

LOCAL FRONT PROFILE / 5:1

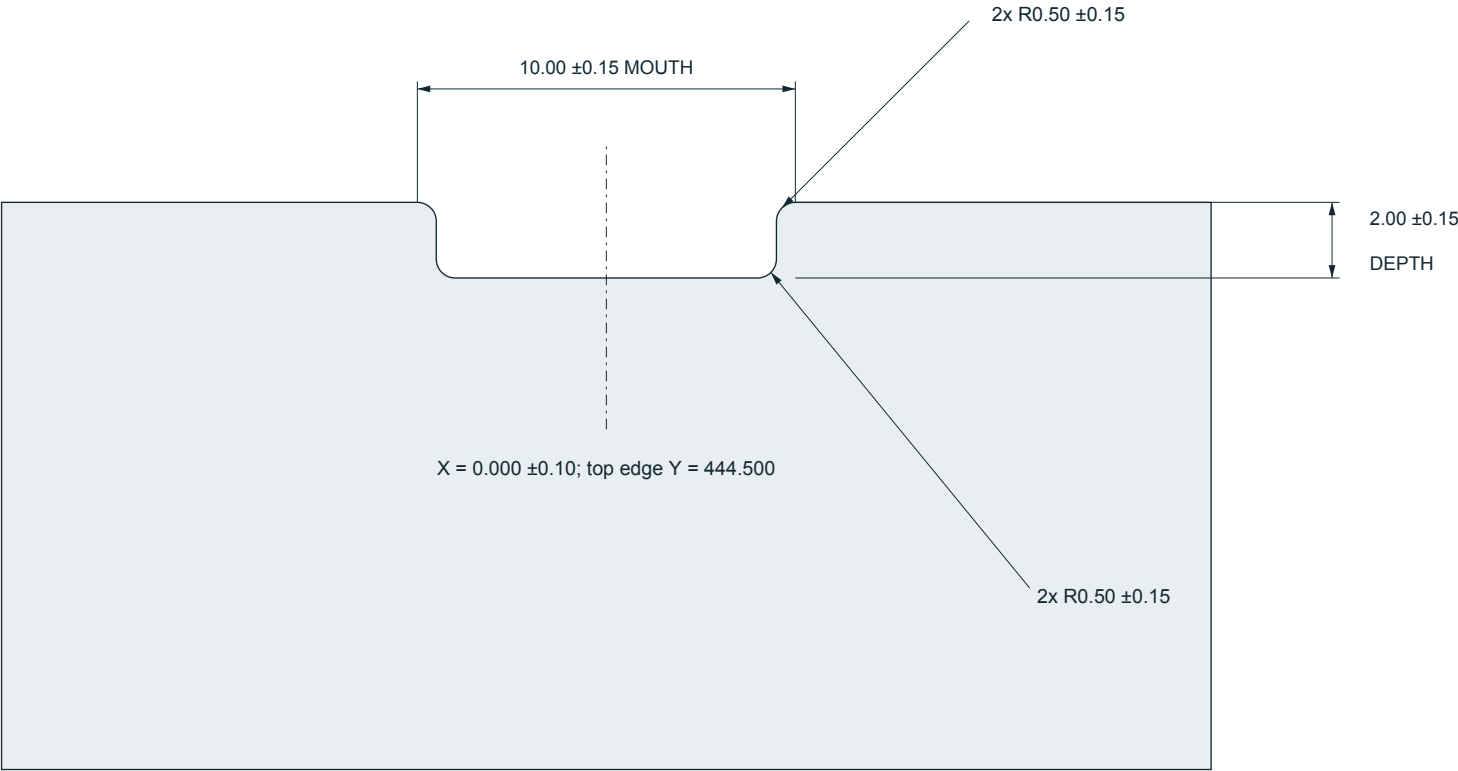

Local boundary is cropped; see sheet 1 for full plate.

CABLE NOTCH REQUIREMENTS

- One open notch, THROUGH the full 2 mm sheet.
- Centred on the plate width; opens at the top edge.
- Maximum mouth width: 10.00 ±0.15.
- Depth below straight top edge: 2.00 ±0.15.
- 2x R0.5 entry transitions; 2x R0.5 bottom corners.
- All four arcs tangent to adjoining straight edges.
- Parallel throat width: 9.00 REF.
- Bottom flat width: 8.00 REF.
- Floor elevation: Y442.500 REF.

EDGE FINISH - E01 ONLY

- Round cable-contact edges R0.30-0.50 on both broad faces, continuously around the notch.
- Blend smoothly into the adjacent top-edge finish.
- Remove all burrs, sharp lips and rough cut striations.
- This finish overrides the general edge break at E01.
- Small edge rounds are not modelled in STEP.

MANUFACTURING AND INSPECTION

- Laser-cut the nominal rounded profile as part of the outside contour; finish the cable-contact edges afterwards.
- No angled ramp or sheet bend is required: the tangent radii provide the smooth entry and bottom transitions.
- Notch dimensions refer to the nominal through profile, excluding the small face edge rounds.
- Check width, depth, centre position, corner radii and the smooth edge finish on both faces.
- This issue changes only the top edge of R4; all 68 fixing positions and four airflow apertures remain unchanged.
- General material, flatness, finish and hole requirements remain as specified on sheets 1 and 2.

304 / EN 1.4301 stainless steel; thickness 2.00 ±0.10

Units: mm; dimensions at 20°C; do not scale

Geometry R6; 2026-09-15

Production drawing / quotation and supplier review

No threads or countersinks

Scale as stated

SHEET 3 / 3

No product markings