


SN1260-R5-M01-PLATE

R5 CABLE NOTCH / ISSUE M01

Supernova 1260 radiator / NF-A20 rack plate - profile and feature identification

Single flat plate - all features through

FRONT VIEW 1:2 / IDENTIFIERS REFER TO SHEET 2

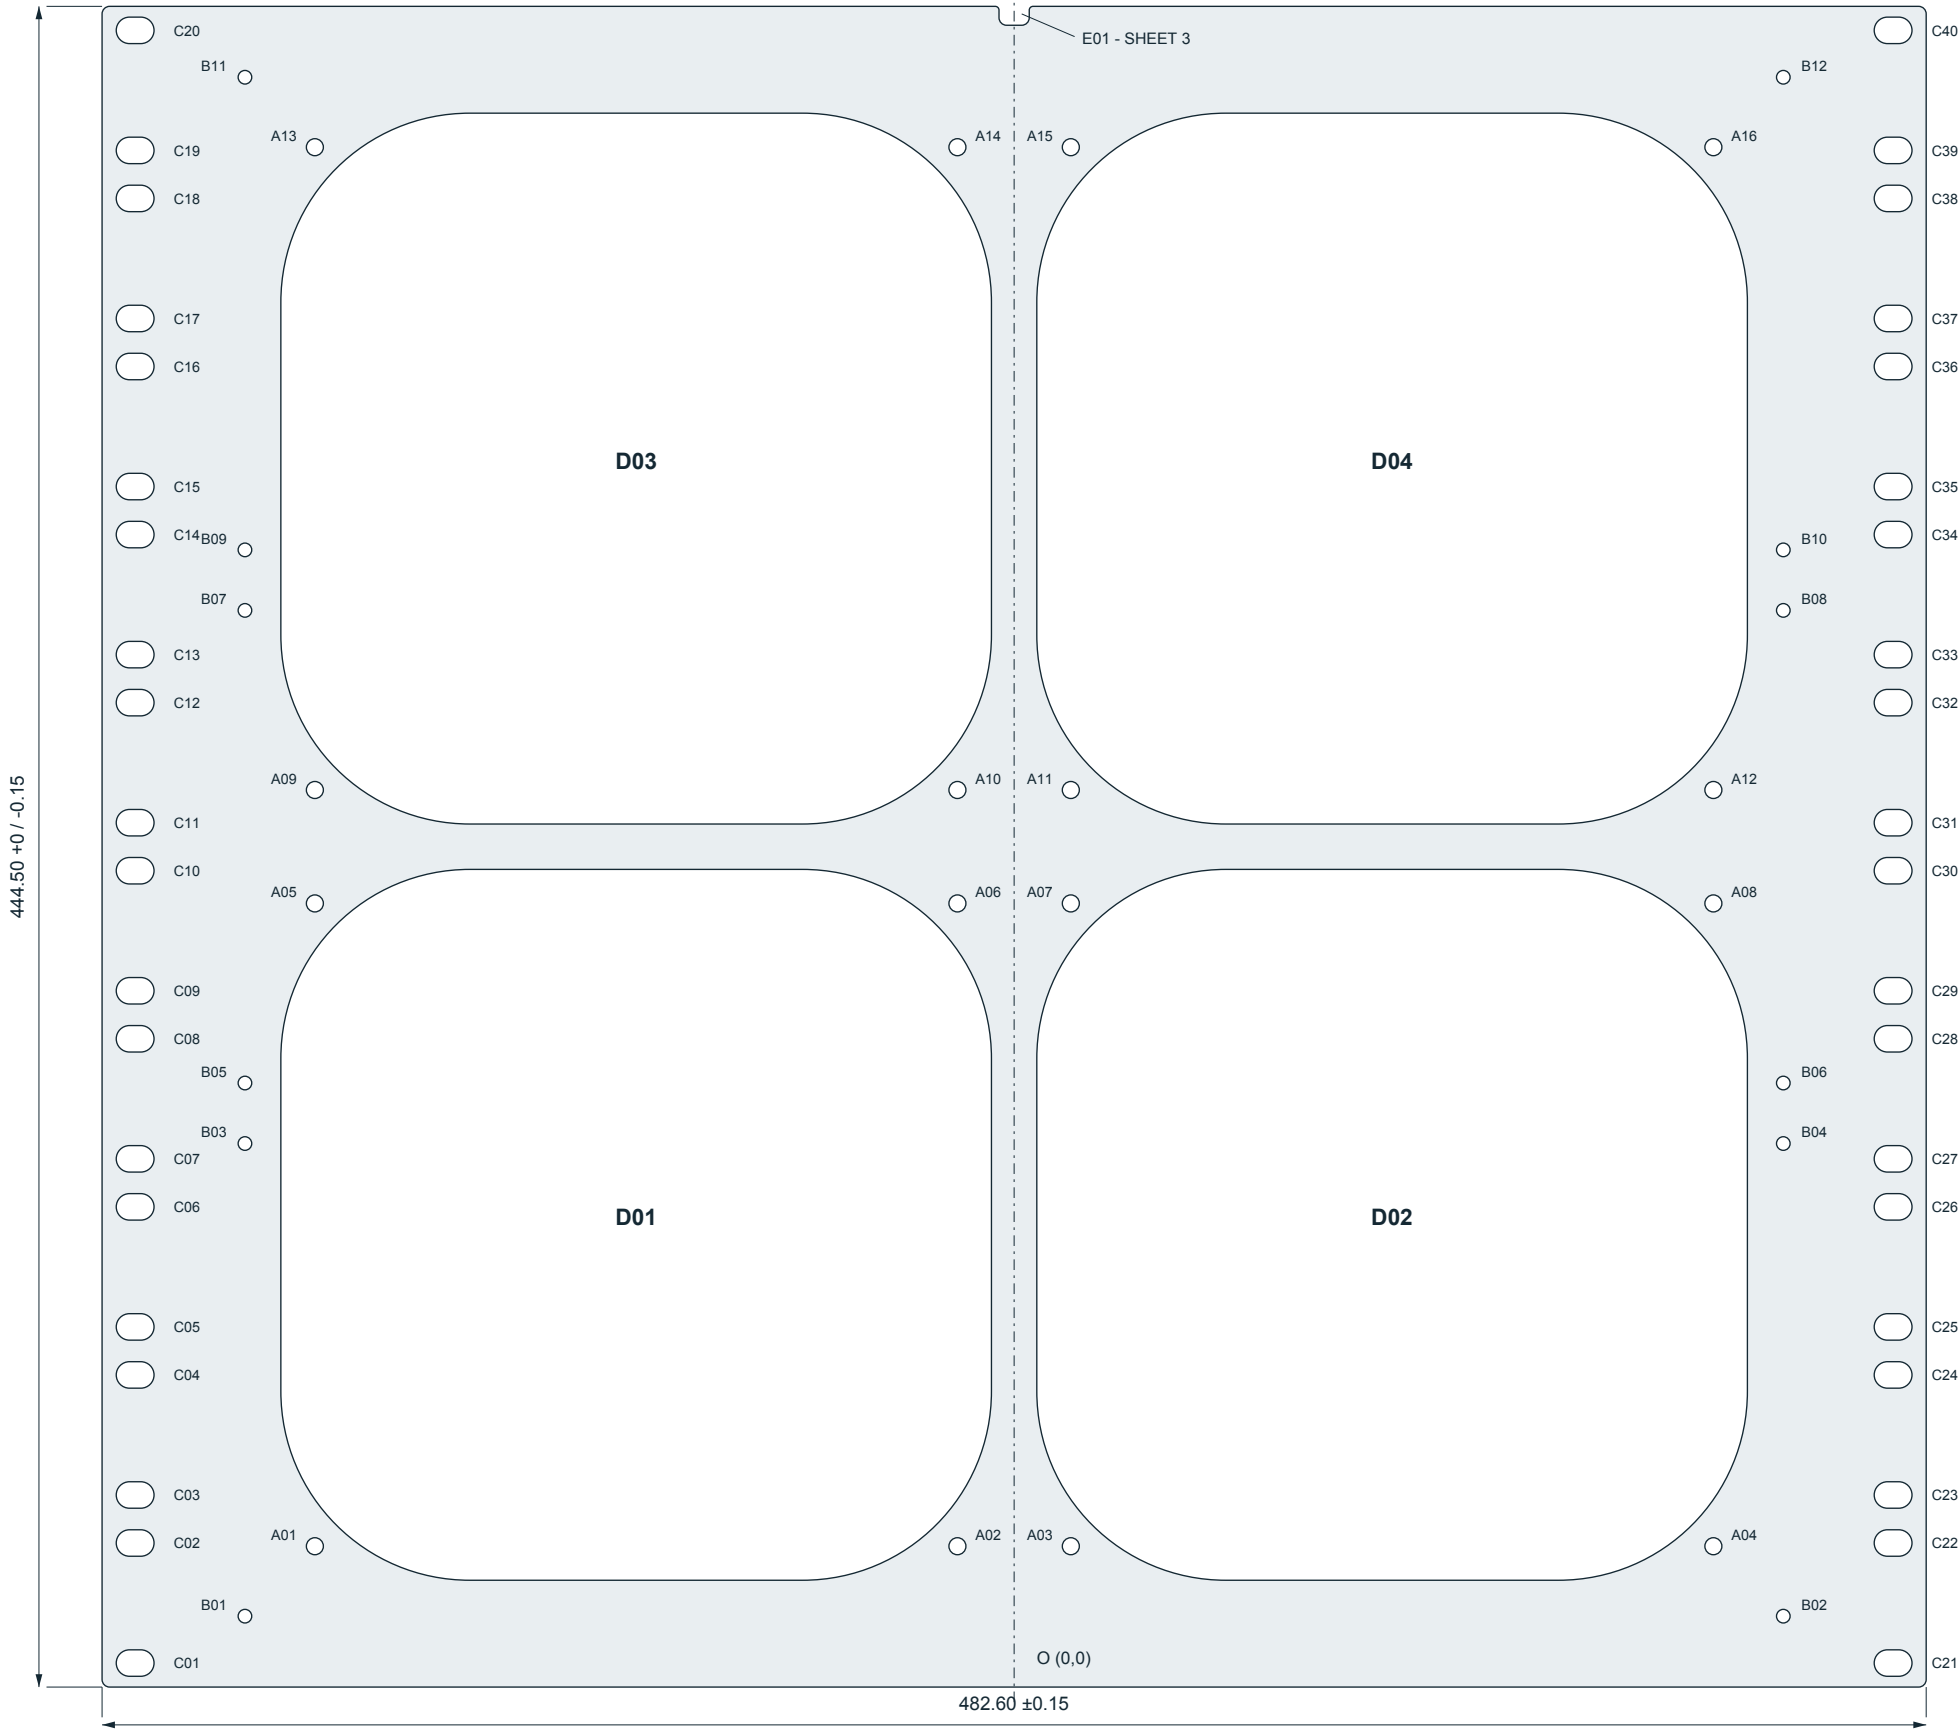

FEATURES

- A01-A16: 16x Ø4.50 +0.15/0 THROUGH.
Plain fan mounting holes for M4 screws + nuts.
- B01-B12: 12x Ø3.60 +0.15/0 THROUGH.
Plain radiator mounting holes for M3 screws.
M3 threads are in the bought-in radiator.
- C01-C40: 40x 10.00 ±0.15 x 7.00 +0.15/0
horizontal slots THROUGH; semicircular ends.
- D01-D04: 4x 188.00 ±0.15 square cut-outs,
corner R50.00 ±0.15, THROUGH.
- Outer corners: 4x R2.00 ±0.15.
- E01: rounded top cable notch; see sheet 3.

MANUFACTURING NOTES

- One flat 2 mm sheet; no bends or welds.
- NO TAPPED HOLES IN THIS PLATE.
- NO COUNTERSINKS OR COUNTERBORES.
- Laser-cut profile and slots. Drill/finish round
holes where necessary to meet this drawing.
- Fan holes A: edge break 0.10 max both faces.
Other edges: break 0.20-0.30; E01 see sheet 3.
Edge breaks are not modelled in STEP.
- Flatness: 0.50 max, free state, whole plate.
- Uniform satin brushed finish; no coating,
engraving, printing or identification marks.
- Do not add fasteners, rivet nuts or standoffs.
- Confirm specified tolerances and flatness
before fabrication; report discrepancies.

COORDINATES AND TOLERANCES

- Origin O: width centreline at bottom edge.
- X right; Y up; all feature axes normal to sheet.
- Hole / slot centre X,Y coordinates: ±0.10.
- Other profile dimensions: ±0.15 unless stated.
- Dimensions apply after finishing; full through
diameters exclude the permitted edge breaks.

- Matching STEP defines the nominal geometry.
- All dimensions / feature IDs are drawing-only.

304 / EN 1.4301 stainless steel; thickness 2.00 ±0.10

Units: mm; dimensions at 20°C; do not scale

Geometry R5; 2026-09-15

Production drawing / quotation and supplier review

No threads or countersinks

Scale as stated

SHEET 1 / 3

No product markings

SN1260-R5-M01-PLATE

R5 CABLE NOTCH / ISSUE M01

Hole and slot coordinate schedules - all 68 fixing positions and four air apertures

Single flat plate - all features through

A: FAN HOLES / 16x Ø4.50 +0.15/0

ID	X	Y
A01	-185.000	37.250
A02	-15.000	37.250
A03	15.000	37.250
A04	185.000	37.250
A05	-185.000	207.250
A06	-15.000	207.250
A07	15.000	207.250
A08	185.000	207.250
A09	-185.000	237.250
A10	-15.000	237.250
A11	15.000	237.250
A12	185.000	237.250
A13	-185.000	407.250
A14	-15.000	407.250
A15	15.000	407.250
A16	185.000	407.250

B: RADIATOR HOLES / 12x Ø3.60 +0.15/0

ID	X	Y
B01	-203.500	18.750
B02	203.500	18.750
B03	-203.500	143.750
B04	203.500	143.750
B05	-203.500	159.750
B06	203.500	159.750
B07	-203.500	284.750
B08	203.500	284.750
B09	-203.500	300.750
B10	203.500	300.750
B11	-203.500	425.750
B12	203.500	425.750

C: RACK SLOTS / 40x 10.00 x 7.00

ID	X	Y	ID	X	Y
C01	-232.550	6.350	C21	232.550	6.350
C02	-232.550	38.100	C22	232.550	38.100
C03	-232.550	50.800	C23	232.550	50.800
C04	-232.550	82.550	C24	232.550	82.550
C05	-232.550	95.250	C25	232.550	95.250
C06	-232.550	127.000	C26	232.550	127.000
C07	-232.550	139.700	C27	232.550	139.700
C08	-232.550	171.450	C28	232.550	171.450
C09	-232.550	184.150	C29	232.550	184.150
C10	-232.550	215.900	C30	232.550	215.900
C11	-232.550	228.600	C31	232.550	228.600
C12	-232.550	260.350	C32	232.550	260.350
C13	-232.550	273.050	C33	232.550	273.050
C14	-232.550	304.800	C34	232.550	304.800
C15	-232.550	317.500	C35	232.550	317.500
C16	-232.550	349.250	C36	232.550	349.250
C17	-232.550	361.950	C37	232.550	361.950
C18	-232.550	393.700	C38	232.550	393.700
C19	-232.550	406.400	C39	232.550	406.400
C20	-232.550	438.150	C40	232.550	438.150

D: APERTURE CENTRES / 4x 188 SQUARE, R50

ID	X	Y
D01	-100.000	122.250
D02	100.000	122.250
D03	-100.000	322.250
D04	100.000	322.250

All scheduled X,Y coordinates: ±0.10 for A/B/C.

D centre coordinates: ±0.15. Values are not chain dimensions.


A/B holes and C/D cut-outs pass through the full 2 mm sheet.

No pilot bores awaiting tapping: A/B are finished clearance holes.


Inspect all 68 fixing positions for size and position.

Check overall width, height, thickness and free-state flatness.

SLOT C / 5:1

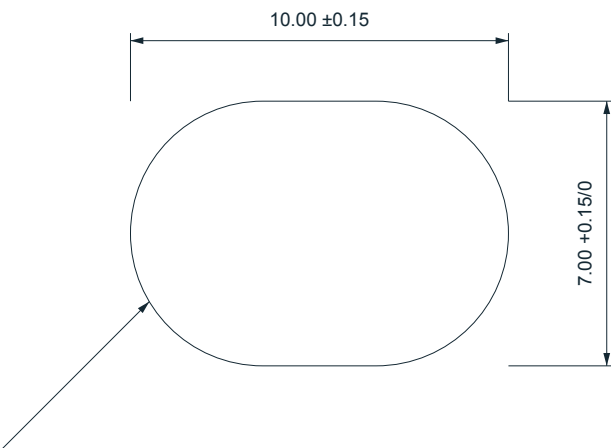

EDGE VIEW / 5:1, HEIGHT SHORTENED



All feature axes perpendicular to broad faces.

No countersink angle applies to this part.

Permitted small edge breaks: see sheet 1.

Free-state flatness 0.50 max over whole plate.

ISSUE CONTROL

Geometry R5; manufacturing issue M01.

Quote / manufacture this single plate only.

Radiator, fans, screws and nuts are bought-in.

No supplier assembly or fitting trial is requested.

Drawing tolerances require supplier acceptance.

304 / EN 1.4301 stainless steel; thickness 2.00 ±0.10

Units: mm; dimensions at 20°C; do not scale

Geometry R5; 2026-09-15

Production drawing / quotation and supplier review

No threads or countersinks

Scale as stated

SHEET 2 / 3

No product markings


SN1260-R5-M01-PLATE

R5 CABLE NOTCH / ISSUE M01

E01 - rounded top-centre fan cable notch

Single flat plate - all features through

LOCAL FRONT PROFILE / 5:1

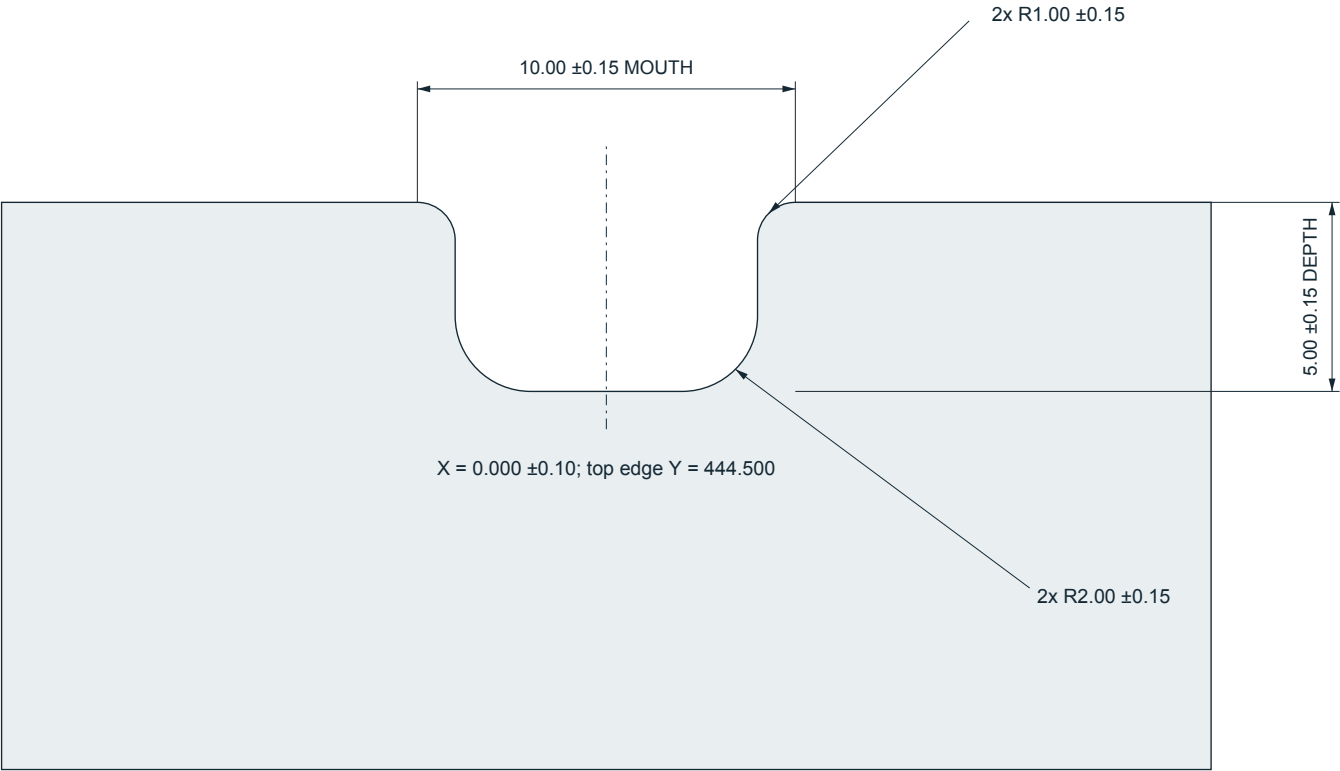

Local boundary is cropped; see sheet 1 for full plate.

CABLE NOTCH REQUIREMENTS

One open notch, THROUGH the full 2 mm sheet.

Centred on the plate width; opens at the top edge.

Maximum mouth width: 10.00 ±0.15.

Depth below straight top edge: 5.00 ±0.15.

2x R1 entry transitions; 2x R2 bottom corners.

All four arcs tangent to adjoining straight edges.

Parallel throat width: 8.00 REF.

Bottom flat width: 4.00 REF.

Floor elevation: Y439.500 REF.

EDGE FINISH - E01 ONLY

Round cable-contact edges R0.30-0.50 on both

broad faces, continuously around the notch.

Blend smoothly into the adjacent top-edge finish.

Remove all burrs, sharp lips and rough cut striations.

This finish overrides the general edge break at E01.

Small edge rounds are not modelled in STEP.

MANUFACTURING AND INSPECTION

Laser-cut the nominal rounded profile as part of the outside contour; finish the cable-contact edges afterwards.

No angled ramp or sheet bend is required: the tangent radii provide the smooth entry and bottom transitions.

Notch dimensions refer to the nominal through profile, excluding the small face edge rounds.

Check width, depth, centre position, corner radii and the smooth edge finish on both faces.

This issue changes only the top edge of R4; all 68 fixing positions and four airflow apertures remain unchanged.

General material, flatness, finish and hole requirements remain as specified on sheets 1 and 2.

304 / EN 1.4301 stainless steel; thickness 2.00 ±0.10

Units: mm; dimensions at 20°C; do not scale

Geometry R5; 2026-09-15

Production drawing / quotation and supplier review

No threads or countersinks

Scale as stated

SHEET 3 / 3

No product markings